


## SINGLE ARM ASSEMBLY



1. Place banner arm (A) onto the telescopic pole (B). Using the supplied screw (C), fix the banner arm in place.

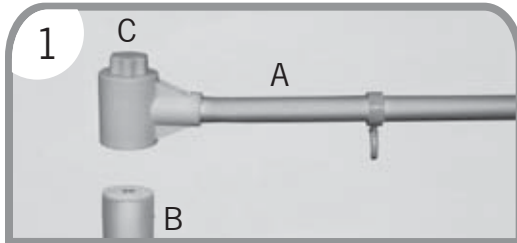

2. Attach flag to the clips of the telescopic pole and banner arm (make sure to mount the double grommet at the top left corner of flag).




3. Extend telescopic pole to the point until the spring buttons (D) lock.



4. Fix security ring (E) to the hole in the telescopic pole right above the bottom flag clip (this will prevent the flag from sliding up).



## DOUBLE ARM ASSEMBLY

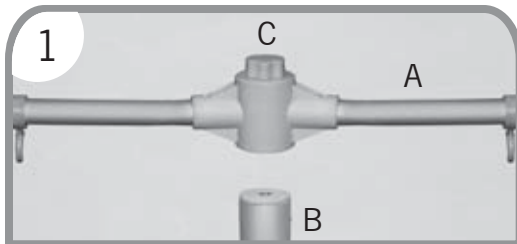


1. Place banner arm (A) onto the telescopic pole (B). Using the supplied screw (C), fix the banner arm in place.




2. Attach flag to the clips of the telescopic pole and banner arm (make sure to mount the double grommet at the top left corner of flag).



3. Extend telescopic pole to the point until the spring buttons (D) lock.

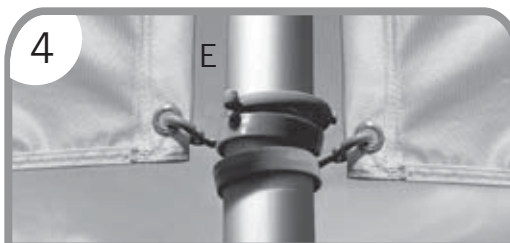


4. Fix security ring (E) to the hole in the telescopic pole right above the bottom flag clips (this will prevent the flag from sliding up).

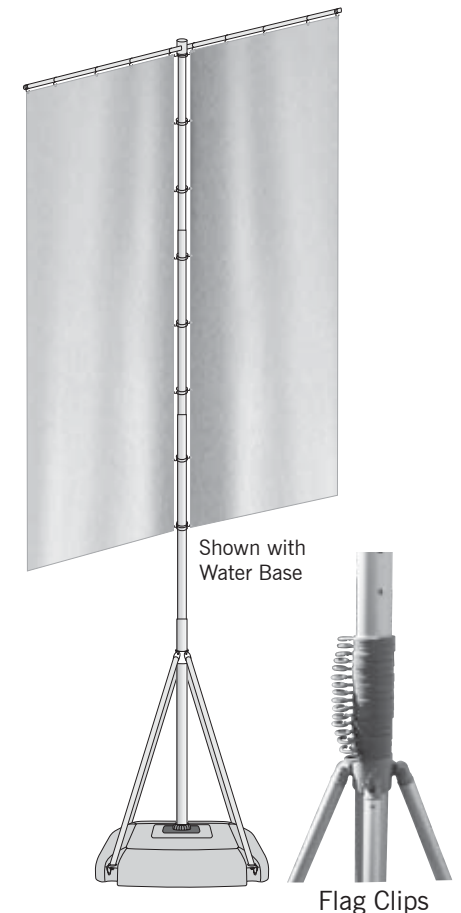


Do not fly your Empire Pole 100 in extreme winds (7-12mph or 3bft and higher) and/or thunderstorms. Do not use near overhead wires. User must read and observe construction sheet. If this is not done correctly it may result in injury or death and all warranties will be void. All warranties will be void if the Empire Pole 100 hardware is used with any flag not produced by us.




## PARALLEL ARM ASSEMBLY

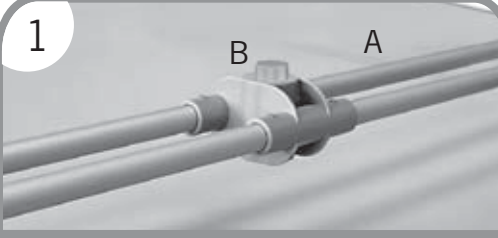

1. Mount the 2 distance pieces (A) to the pole's upper connecting piece (B).

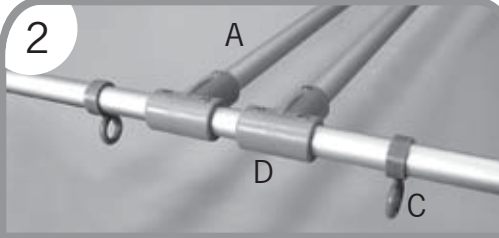


2. Screw the upper banner arms (C) with their pre-mounted parallel connectors (D) onto the ends of the distance pieces (A).

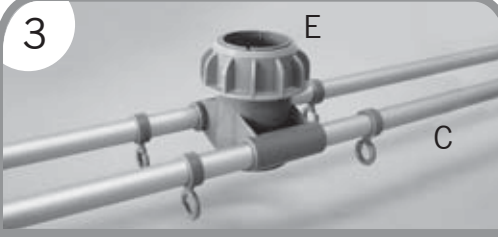


3. Remove 3 flag clips from the lower banner arms (B). Fit lower banner arms (C) into the pole's lower connecting piece (E) and put the removed flag clips back on. At the connecting piece (E), fix the lower banner arms (C) in a central position.




4. Attach flags to the upper and lower banner arms. Extend telescopic pole to the point that the spring buttons lock.

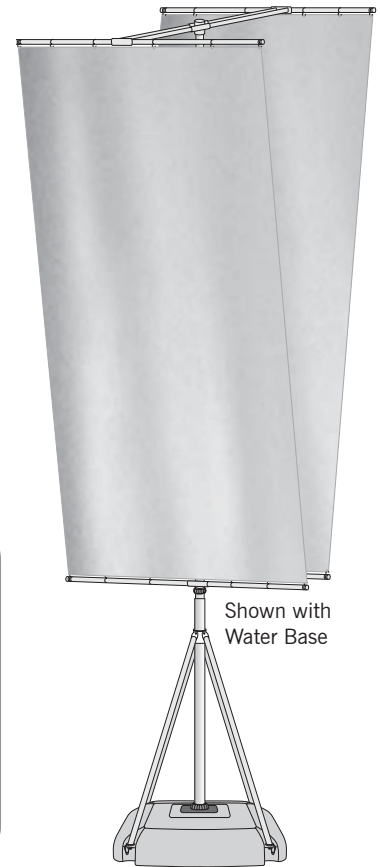


## TRIPLE ARM ASSEMBLY

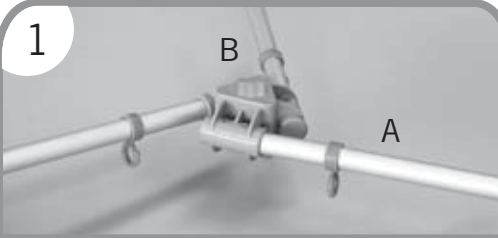


1. Screw three of the banner arms (A) into the upper connecting piece (B).

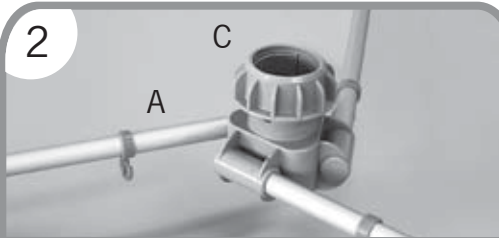

2. Screw the remaining three banner arms (A) into the lower connecting piece (C).



3. Attach flag to the clips of the telescopic pole and banner arm (make sure to mount the double grommet at the top left/right corner of flags).




4. Extend telescopic pole to the point until the spring buttons (D) lock.



Do not fly your Empire Pole 100 in extreme winds (7-12mph or 3bft and higher) and/or thunderstorms. Do not use near overhead wires. User must read and observe construction sheet. If this is not done correctly it may result in injury or death and all warranties will be void. All warranties will be void if the Empire Pole 100 hardware is used with any flag not produced by us.




1

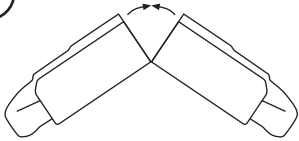


Open up the folded Water Base.

2

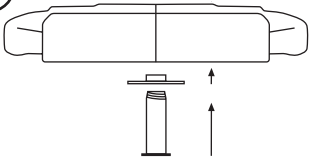


Position lower locking panel at the base bottom and keep in place by inserting the pole sleeve.

3




Fill the two base tanks with water approx. 18.5 gallons (70 liters).




To drain, remove the cap on each valve located on both sections of the base.

4

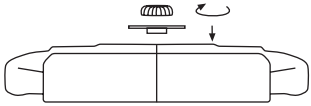


Attach upper locking panel to the base by screwing the sleeve nut onto the pole sleeve.

5

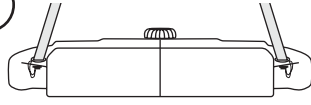


Mount the collapsible, 4-pronged Support Bracket to the base.

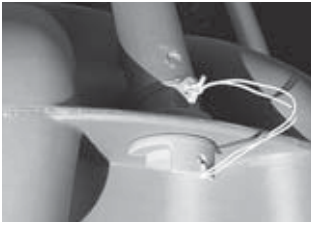

Secure Support Bracket at the base corners with the supplied plastic C-clips.

6

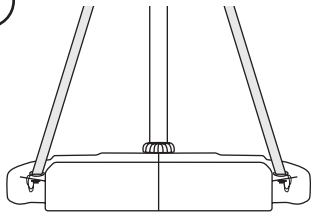

Mount telescopic pole with pre-mounted flag clips.

## OTHER BASE OPTIONS

