



# STEP 1

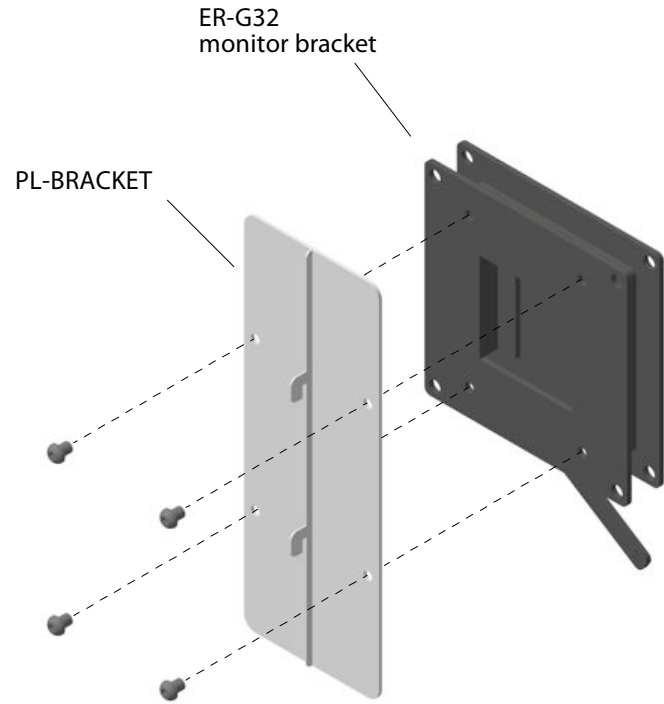


If it's not already assembled, attach the bracket with two hooks to the LCD mount plate as shown.

# STEP 2

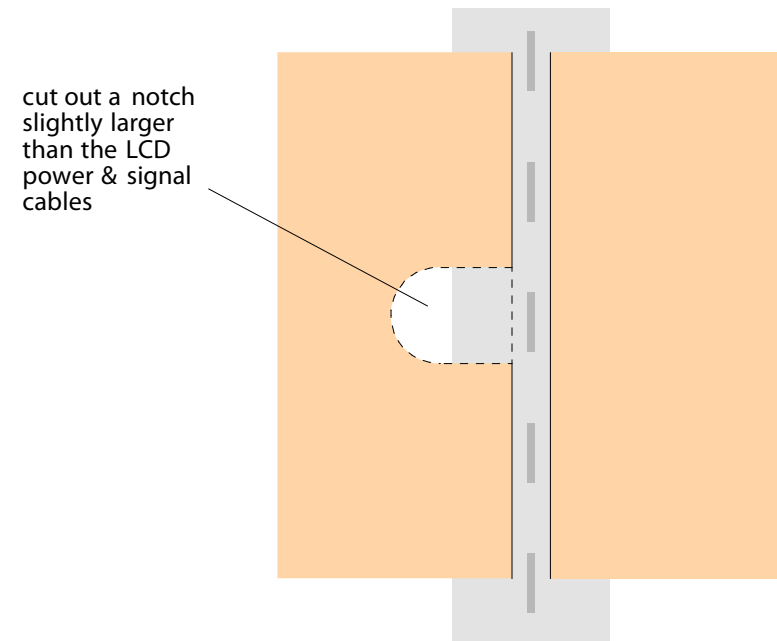

Cut a small notch out of the edge of one panel to allow the LCD cables to pass through to back. Make sure notch is larger enough to clear the channel bar, and that its location will be hidden behind the mounted LCD screen.

# STEP 3

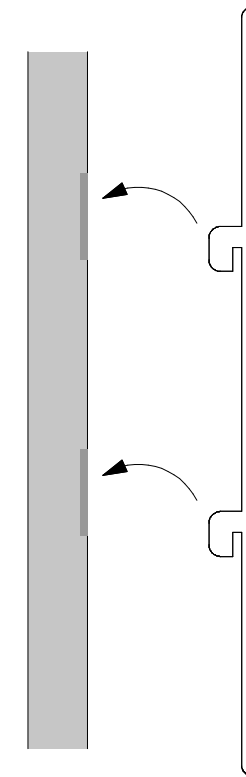


Mount LCD to channel bar by sliding the hooks of the bracket into the slots on the channel bar as shown here and below.



Mounted LCD shown here.

**CAMELBACK  
DISPLAYS**

Office: 1-877-268-7469  
 Fax: 281-288-2870  
 www.camelbackdisplays.com  
 1922 Willow Wisp Lane • Spring, TX • 77388

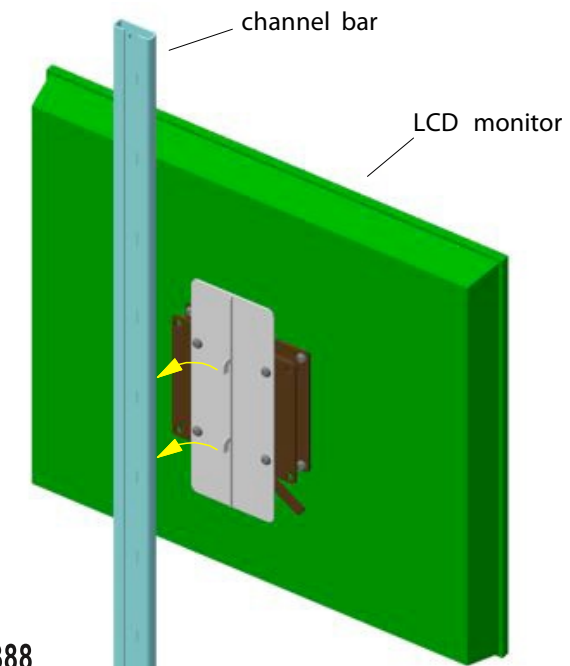

PART: PL-MOUNT