
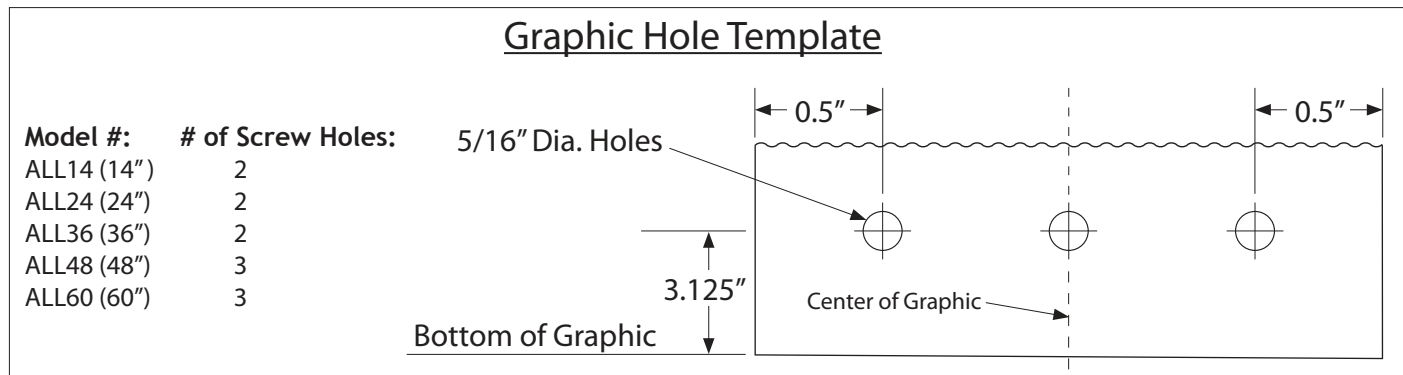
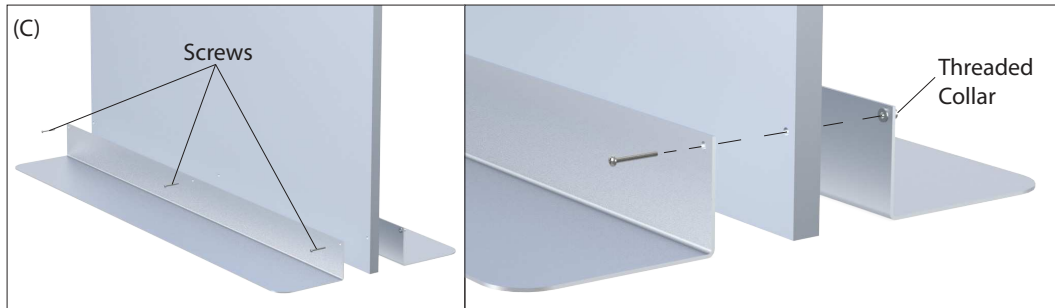


# Adjustable Double LL Mount Instructions

1. Select screws based on graphic thickness (Fig. A).
2. Place graphic between base plates (Fig. B).
3. Insert screws through front plate and graphic, then fasten to threaded collar on back plate. (Fig. C).

(A)  
Recommended Screw Selection

Graphic Thickness	Screw Length
1/2"	1"
3/4"	1.25"
1"	1.5"

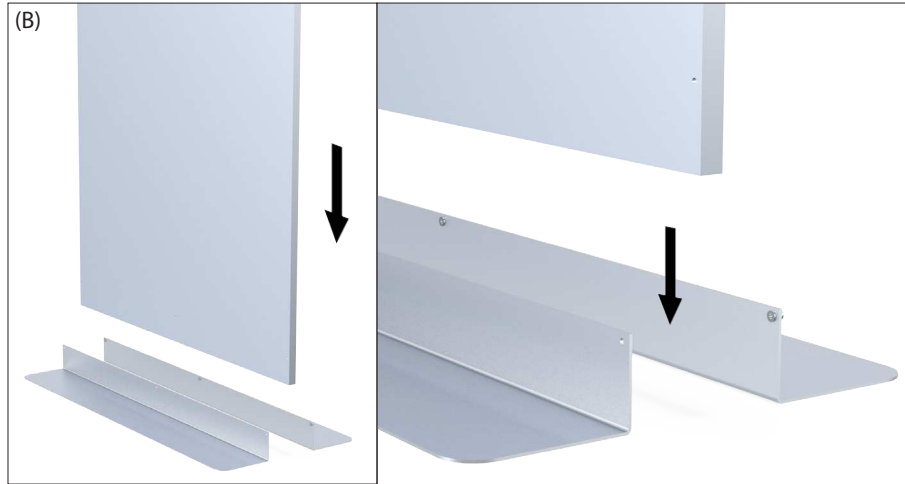

## Applicable Products:

### Model #:

ALL14 (14")  
 ALL24 (24")  
 ALL36 (36")  
 ALL48 (48")  
 ALL60 (60")



ALL48 shown