Archway Event Tent




Set-Up

Step 1

Remove all parts from the carry case and place at your

desired location. Take the Center Hub (5) and insert A1/B1/C1/D1 into the hubs by pressing the snap release button and releasing when it lines up with the hole.




Step 3

Before attaching the Feet Posts (1), drape the Canopy (6) over the curved frame legs (4). Fully stretch Canopy (6) and align with curved frame legs (4).




Step 2


Repeat snap button process for A2/B2/C2/D2 curved frame legs (4)



Step 4

With Canopy (6) aligned over curved frame legs (4), go underneath and attach all velcro connections.






Set-Up Continued...


Step 5

Drape peak (7) over top of Canopy. Clip into place at all 4 locations.

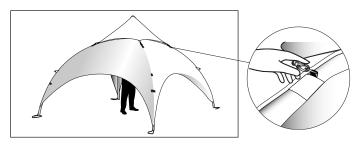

Step 7


Verify that Canopy (6) and Peak (7) are aligned with the frame and all velcro tabs are secure on underside. Raise the frame and attach all feet posts (1). Secure the straps.



Step 6

Take Peak Pole (2) and Peak Pole Handle (3), go

underneath the tent and insert the Peak Pole (2) up through the open top space and align it with apex of the peak. Insert





the end of Peak Pole (2) through framework. Screw Peak Pole Handle (3) to end of Peak Pole (2)

TENT IS COMPLETE




Options: Awning and/or Walls

Awning Parts

8 - poles (A1-A3) 9- end poles (A4) 10- Awning Post (Qty:2) 11- Bracket (Qty: 2)

12- Allen Wrench


13- Awning




Awning Step 2

Insert the end of the End Pole (9) into the hole located at the base of the Feet Posts (1). Zipper the awning to the canopy. Make sure holes in the assembled Poles (8) face the tent.














Walls can be attached to the Canopy zipper or the Awning Zipper. Simply, zipper the wall in place and velcro around tent legs.


Awning_Step 1


Assemble Poles (8) and End Poles (9) (A-1thruA-4) and insert it into the pocket on the Awning (13). Make sure to align the holes on the assembled poles with the cut-outs in the Awning (13).



Awning Step 3

Attach the Awning Posts (10) to each side of the canopy by clamping the Bracket (11) to the tent frame using the Allen Wrench (12). Insert one Post end into the Bracket and the other end into the hole on the Assembled Poles (8). Secure with strap.





TENT WITH AWNING

TENT WITH WALL



Warranty Information: All products are designed to provide the user with a cost-effective and durable product. Standard warranty is a 'one year parts and labor' warranty which warrants product against defects in material and workmanship. It does not cover damage due to accidents, abuse, or normal wear and tear. Products found to be defective will be replaced or repaired at factory's discretion.