


Step 1:

Group all like connectors and panels for ease of assemply.

Start assembly on the farthest left hand side of the display and work "left to right".

- Insert bottom connectors into both sides of the first panel. (figure 1)
- Now add a second panel by first inserting the bottom connector on the right side and sliding the left side onto the first panels right conector. (figure 2)

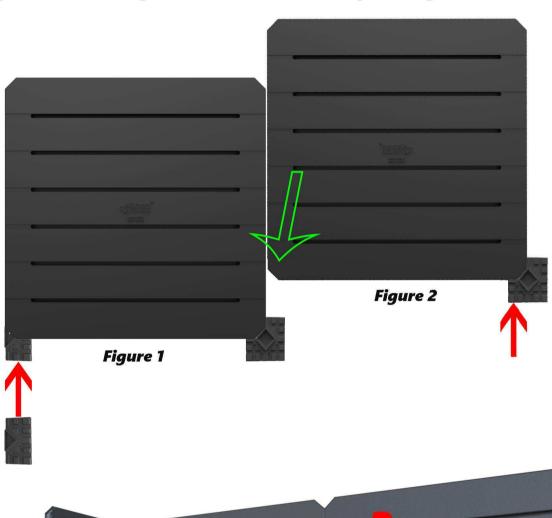




Step 2:

Ensure that the first row of panels is complete. (these cannot be reajusted once additional rows have been added without taking the entire display appart.)

- Insert the appropriate connectors on the top of the first row. (figure 3)
- Now add a second row of panels by lining each panel up with the left and right side connectors and slide into place pressing evenly on each side until the panel is seated.
- Repeat this process until the second row is complete. (figure 4)

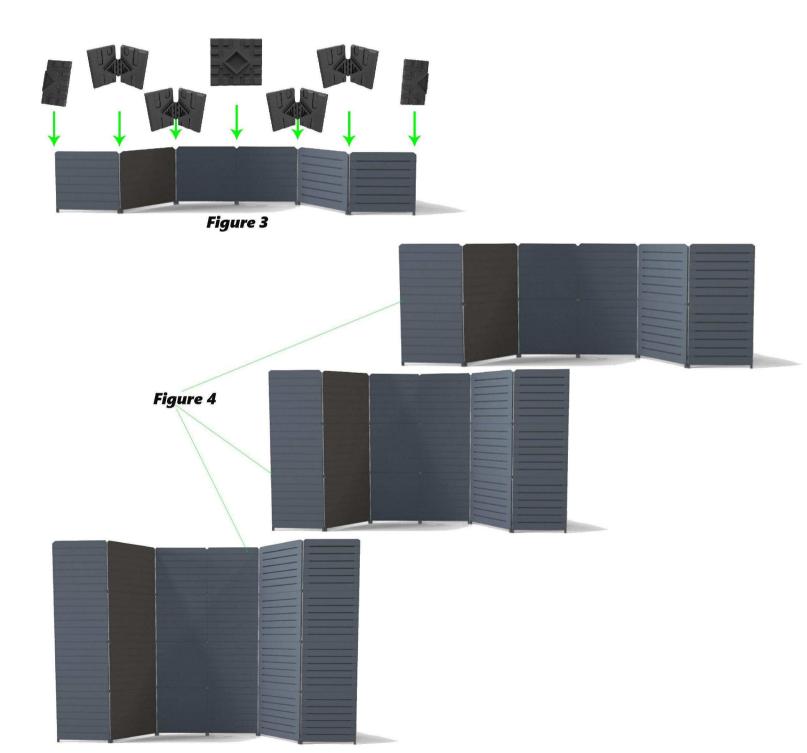

Step 3:

Once the desired panel height is reached, insert the top connectors to complete the display.



NOTE (caution): Ensure that the display has been properly configured and is structurally sound prior to hanging product on the panels.

- -Use caution when hanging product and avoid placing heavy items at the top of the display.
- -The style and quality of slatwall fixtures vary greatly. It is important to ensure compatibility with GOGOpanels and also ensure all fixtures are not over loaded.
- -Failure to follow these instructions could result in display failure, property damage, injury, or death.