

# Hybrid Pro Modular Kit 17

**HP-K-17**  
Hybrid Pro™ Modular exhibits and counters are a perfect solution for the serious exhibitor. Exhibits feature heavy-duty aluminum extrusion frames and push-fit fabric graphics. Count on making an unforgettable impact with Hybrid Pro Modular exhibit kits, counters, and accessories.



We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications.

## features and benefits:

- Silver aluminum extrusion frame
- 15'9" tall 20' x 20' island display
- Base structure features white laminate panels with accessible storage closet 96" w x 36" d; lockable door on 36" side
- Six Lumina 200 LED floodlights
- Kit includes frame, accessible lockable storage space, four pillowcase graphics, two fabric graphic panels, three shaped Sintra, three counters, six small monitor mounts, six 200 LED floodlights, two molded OCE storage cases and one woodcrate
- Lifetime hardware warranty against manufacturer defects


## dimensions:

Hardware	Graphic
Assembled unit: Center Tower: 15'9" h x 7'5.625" d'  Counter w/Sintra Panels: 51.125" w x 94.5" h x 39.375" d  Counter (each): 37" w x 36.5" h x 25" d 939.8mm(w) x 927.1mm(h) x 635mm(d)  Counter holds max weight 50 lbs / 22.7 kgs	Total visual area: Dye Sub Graphic Structure A1, A2, F1 & F2 (double sided): Outside: 112.56" w x 47.25" h Inside: 110.75" w x 47.25" h  Dye Sub Graphic Structure C1, C2, D1 & D2 (double sided): Outside: 109.5" w x 12" h Inside: 117.31" w x 22" h  Dye Sub Fabric Panels B & E: 35.3" w x 86.48" h  UV Graphic J, K, L: 37.25" w x 35.18" h  UV Graphic G, H, I: 18" w x 49" h  Counter front: 37.25" w x 35.18" h 946.15mm(w) x 893.57mm(h)  Please consider obstructions and spaces created by the extrusions when designing graphics. Be sure to include a 2" bleed around the perimeter of panel B1, B2, C1 and C2 and 5" bleed for fabric structures.





## additional information:

Fabric material: Dye-sublimated fabric  Tabletop color options:  <div><div></div>silver</div> <div><div></div>black</div> <div><div></div>mahogany</div> <div><div></div>natural</div>	Lights Included: Lumina 200 LED floodlight, straight arm and adjustable head, black finish, 19.5" from end to end  Small monitor bracket holds 13-39" LCD, max weight 25 lbs / 11.34 kgs  *Flooring and monitors not included
--	---

**R-HP-K-17**

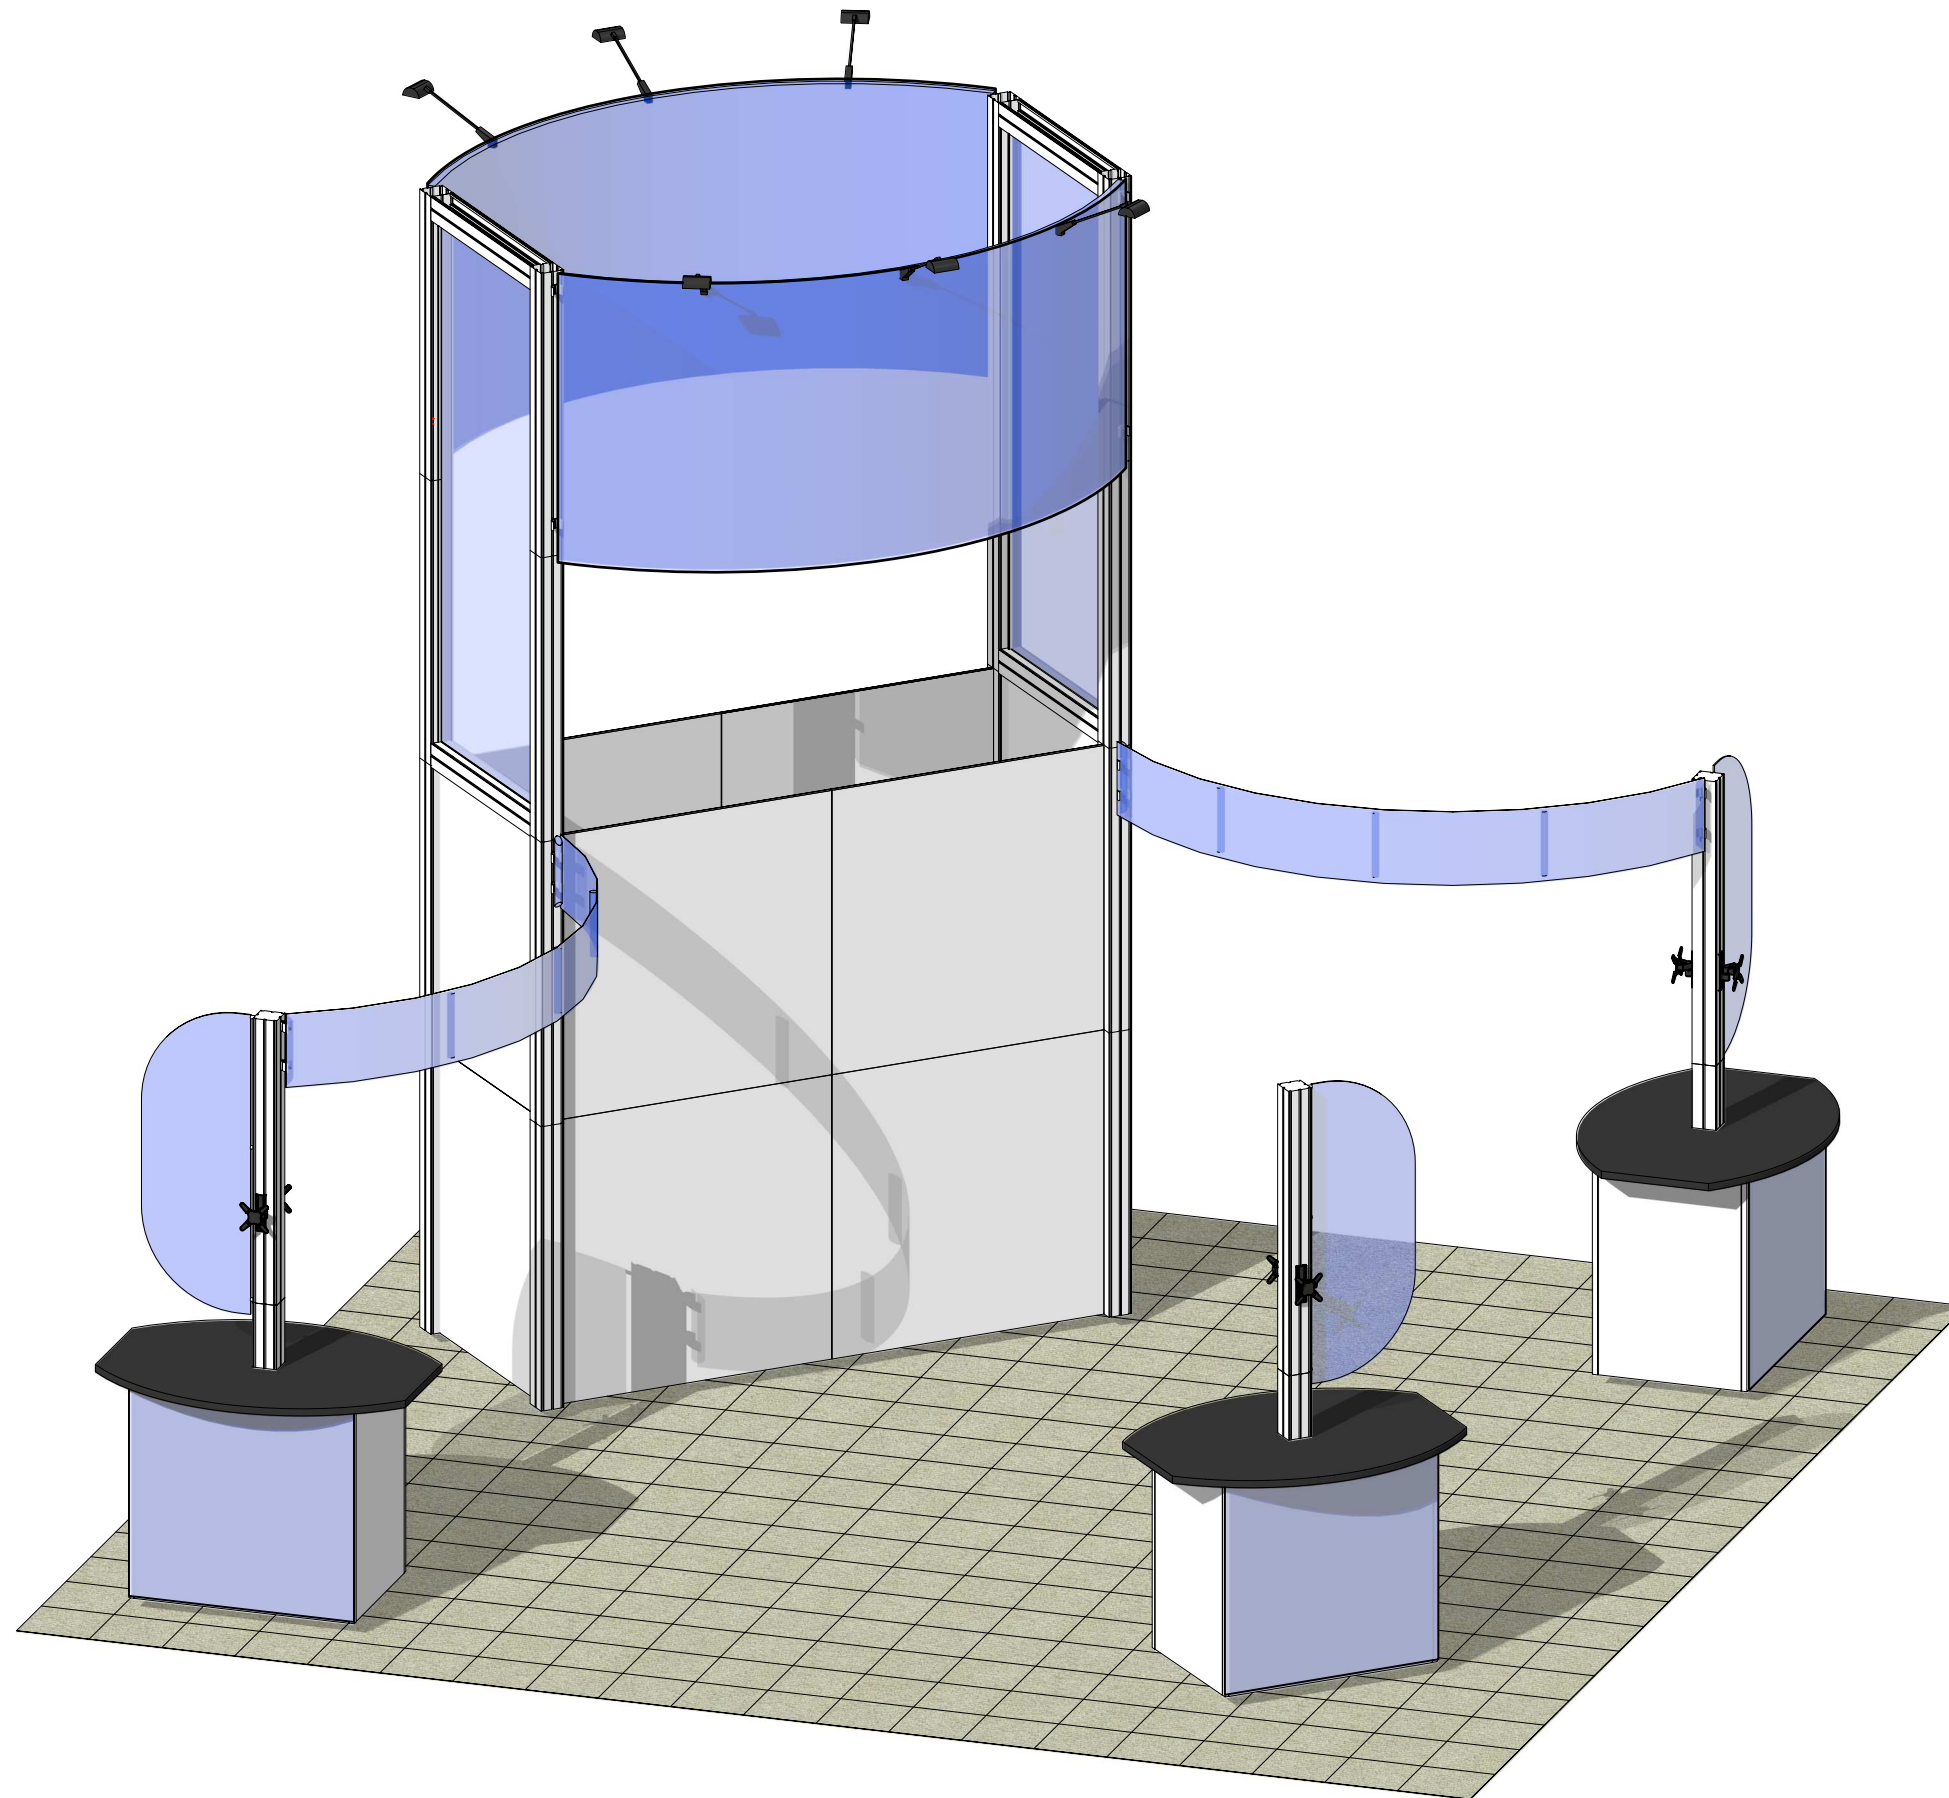


Code	#	Description
PM4BP1	3	15 3/4" X 9 7/8" ALUMINUM BASE PLATE
CUSTOM FS	2	(WAVE-CRV-0804) 8' W X 4' H CURVED BANNER - PLEASE PROVIDE FINAL SEWING SPECS - HARDWARE ONLY
TC-30MM	16	SILVER ANODIZE FINISH 30MM TUBE CLAMP
LEDL10S	6	LED SPOTLIGHT,3M,UL PLUG W/TRANSFORMER SILVER
R15	22	1200MM (47.24") 100MM PM4S2 SQUARE EXTRUSION WITH PH2 STOP AT 305MM BOTH ENDS
R70	8	4 X 4 (1200MM X 1200MM) LAMINATE PANEL
R71	2	4 X 3 (1200MM X 900MM) LAMINATE PANEL
R69	1	2400MM X 900MM LAMINATE PANEL DOOR
R35	2	900MM (35.43") 100MM PM4S2 SQUARE EXTRUSION WITH LOCKS 2 ENDS
R66	2	900MM (35.43") 100MM PM4U U-SHAPED EXTRUSION WITH LOCKS 2 ENDS
GRAPHIC B1	1	86 10/16" (H) X 35 7/8" (W) SINGLE SIDED DYESUB GRAPHIC WITH FCE-2
GRAPHIC B2	1	86 10/16" (H) X 35 7/8" (W) SINGLE SIDED DYESUB GRAPHIC WITH FCE-2
R56	3	900MM X 900MM LAMINATED CABINET DOOR
R74	6	3 X 2 (900MM X 600MM) LAMINATE PANEL
R57	3	3 X 3 (900MM X 900MM) LAMINATE PANEL
CT-54L	3	5' X 4' LAMINATE COUNTER TOP
GRAPHIC D1	1	49"H X 18"W DOUBLE SIDED DSG GRAPHIC ON 6MM SHAPED SINTRA
CKAPS	9	CABLE KIT 7MM PANEL SUPPORT (MULTI ANGLE)
CUSTOM FS	2	(NF-RK-09-1) APPROXIMATELY 310MM x 2281MM C-SHAPED TUBE STRUCTURE
GRAPHIC D2	1	49"H X 18"W DOUBLE SIDED DSG GRAPHIC ON 6MM SHAPED SINTRA
GRAPHIC D3	1	49"H X 18"W DOUBLE SIDED DSG GRAPHIC ON 6MM SHAPED SINTRA
P90S-900	12	900MM (35.43") P90S SILVER LOKPOST EXTRUSION
R67	4	900MM (35.43") FABRIC CONNECTION EXTRUSION
R68	4	2186MM (86.06") FABRIC CONNECTION EXTRUSION
L180N-600	20	600MM (23.62") 180N DEGREE SILVER LINK EXTRUSION
L180N-1200	10	1200MM (47.24") 180N DEGREE SILVER LINK EXTRUSION
INTERNAL SHELF	3	BLACK INTERNAL SHELF
SS1	12	SHELF SUPPORT PIN (SILVER)
R13	15	600MM (23.62") PM4D CONNECTOR WITH TENSION GLIDES
SM-BRACKET	6	SMALL MONITOR BRACKET

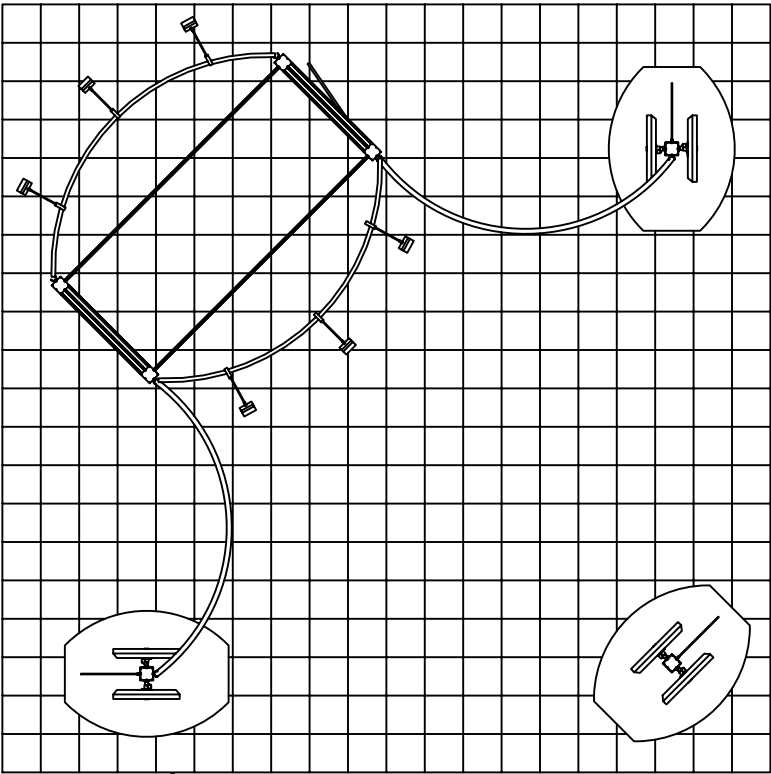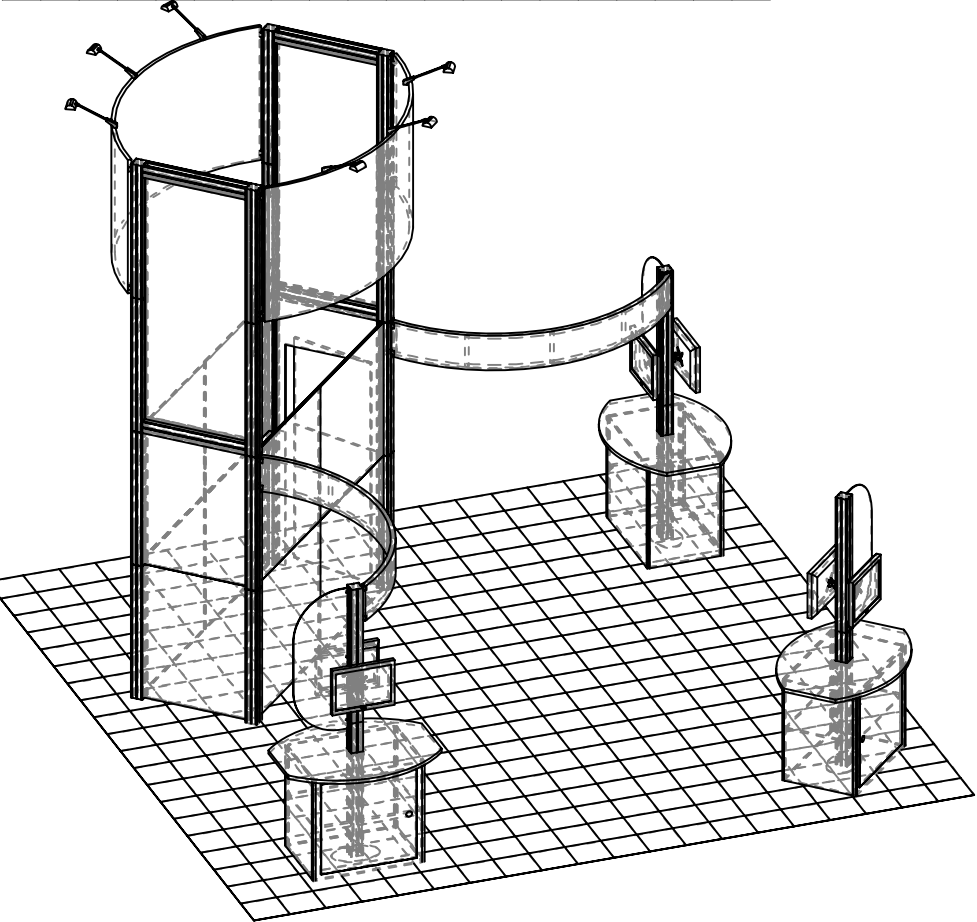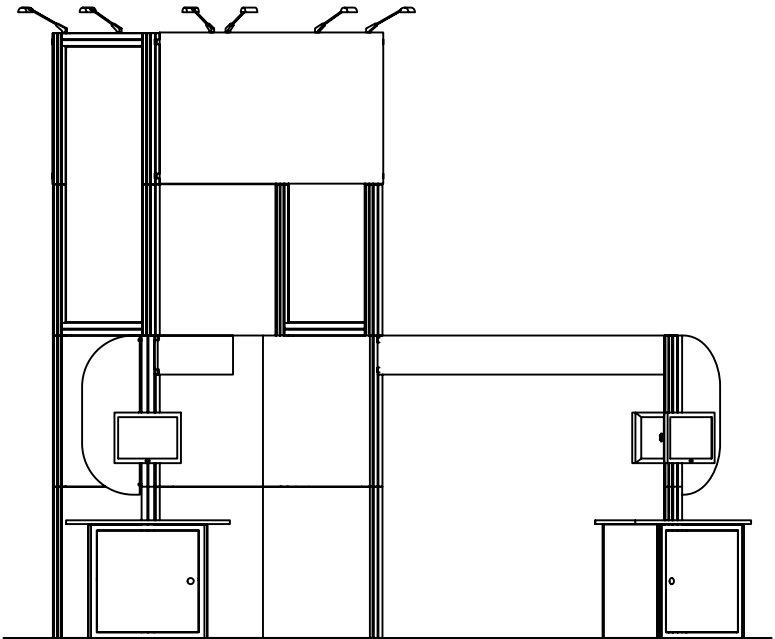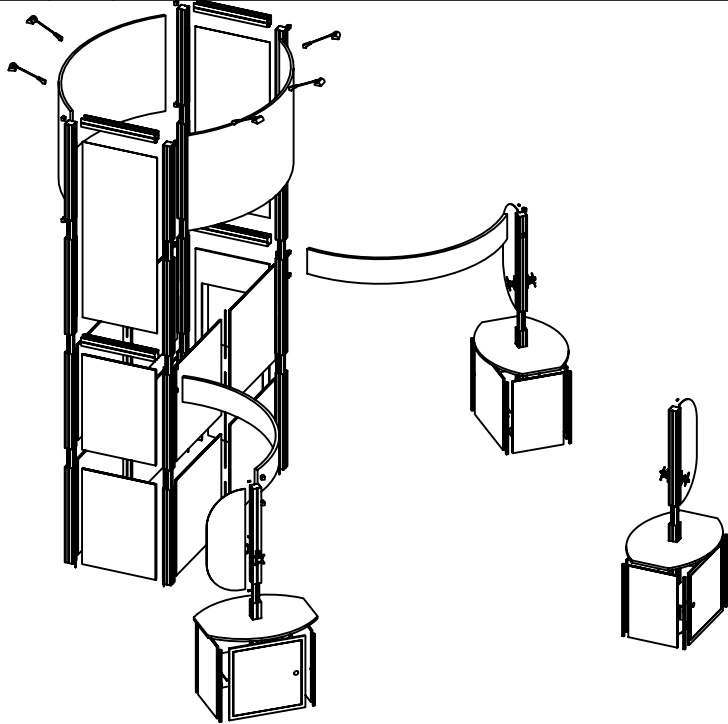

BOM

R-HP-K-17

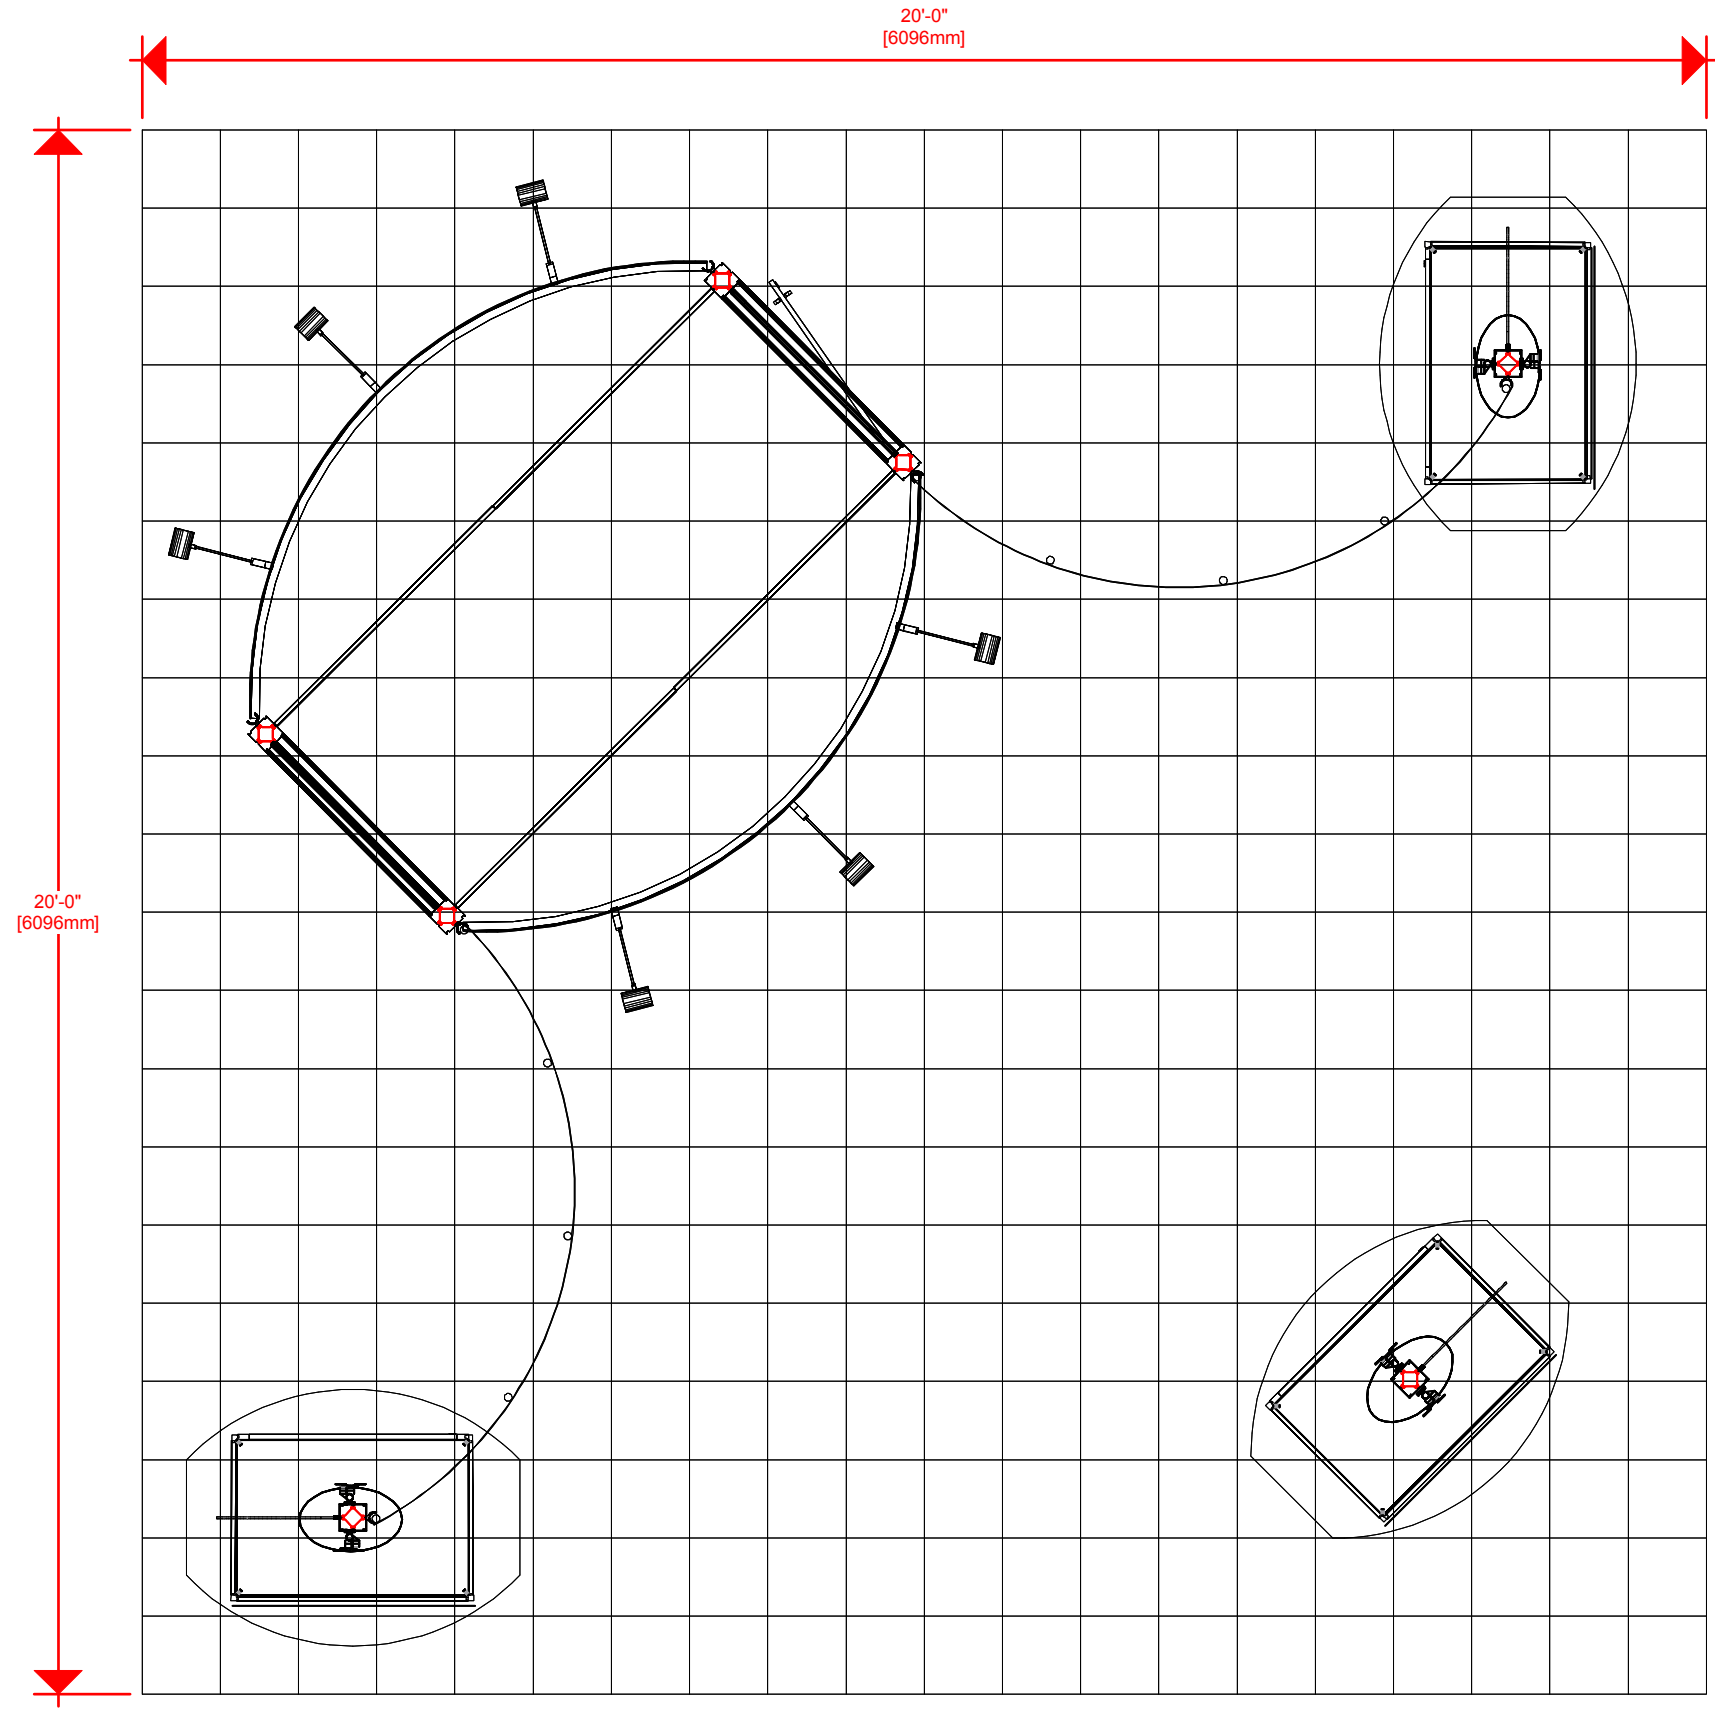


1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")	Phone Line / Fax
2100mm = (82 5/8")	Internet connection
1800mm = (70 7/8")	Outlet
1500mm = (59")	Main Drop (point of distrution)
1200mm = (47 1/4")	
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	

Wire running under carpet




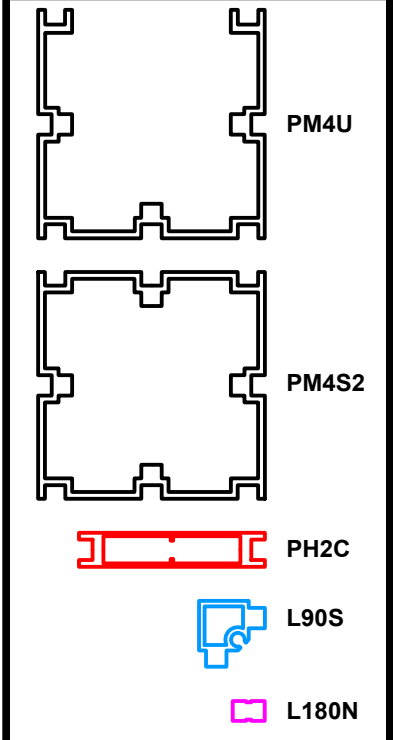


### HYBRID PRO RENTAL KIT

Title: SET-UP INSTRUCTIONS

(6) LEDL10S LIGHTS = 50W PER STICK

Code	#	Description
R15	4	1200MM PM4S2 SILVER EXTRUSION WITH PH2 STOP AT 302MM
R71	1	1200MM V x 900MM W LAMINATE PANEL
R70	4	1200MM V x 1200MM W LAMINATE PANEL
L180N-600	2	600MM 180N DEGREE SILVER LINK EXTRUSION
L180N-600	6	600MM (23.62") 180N DEGREE SILVER LINK EXTRUSION

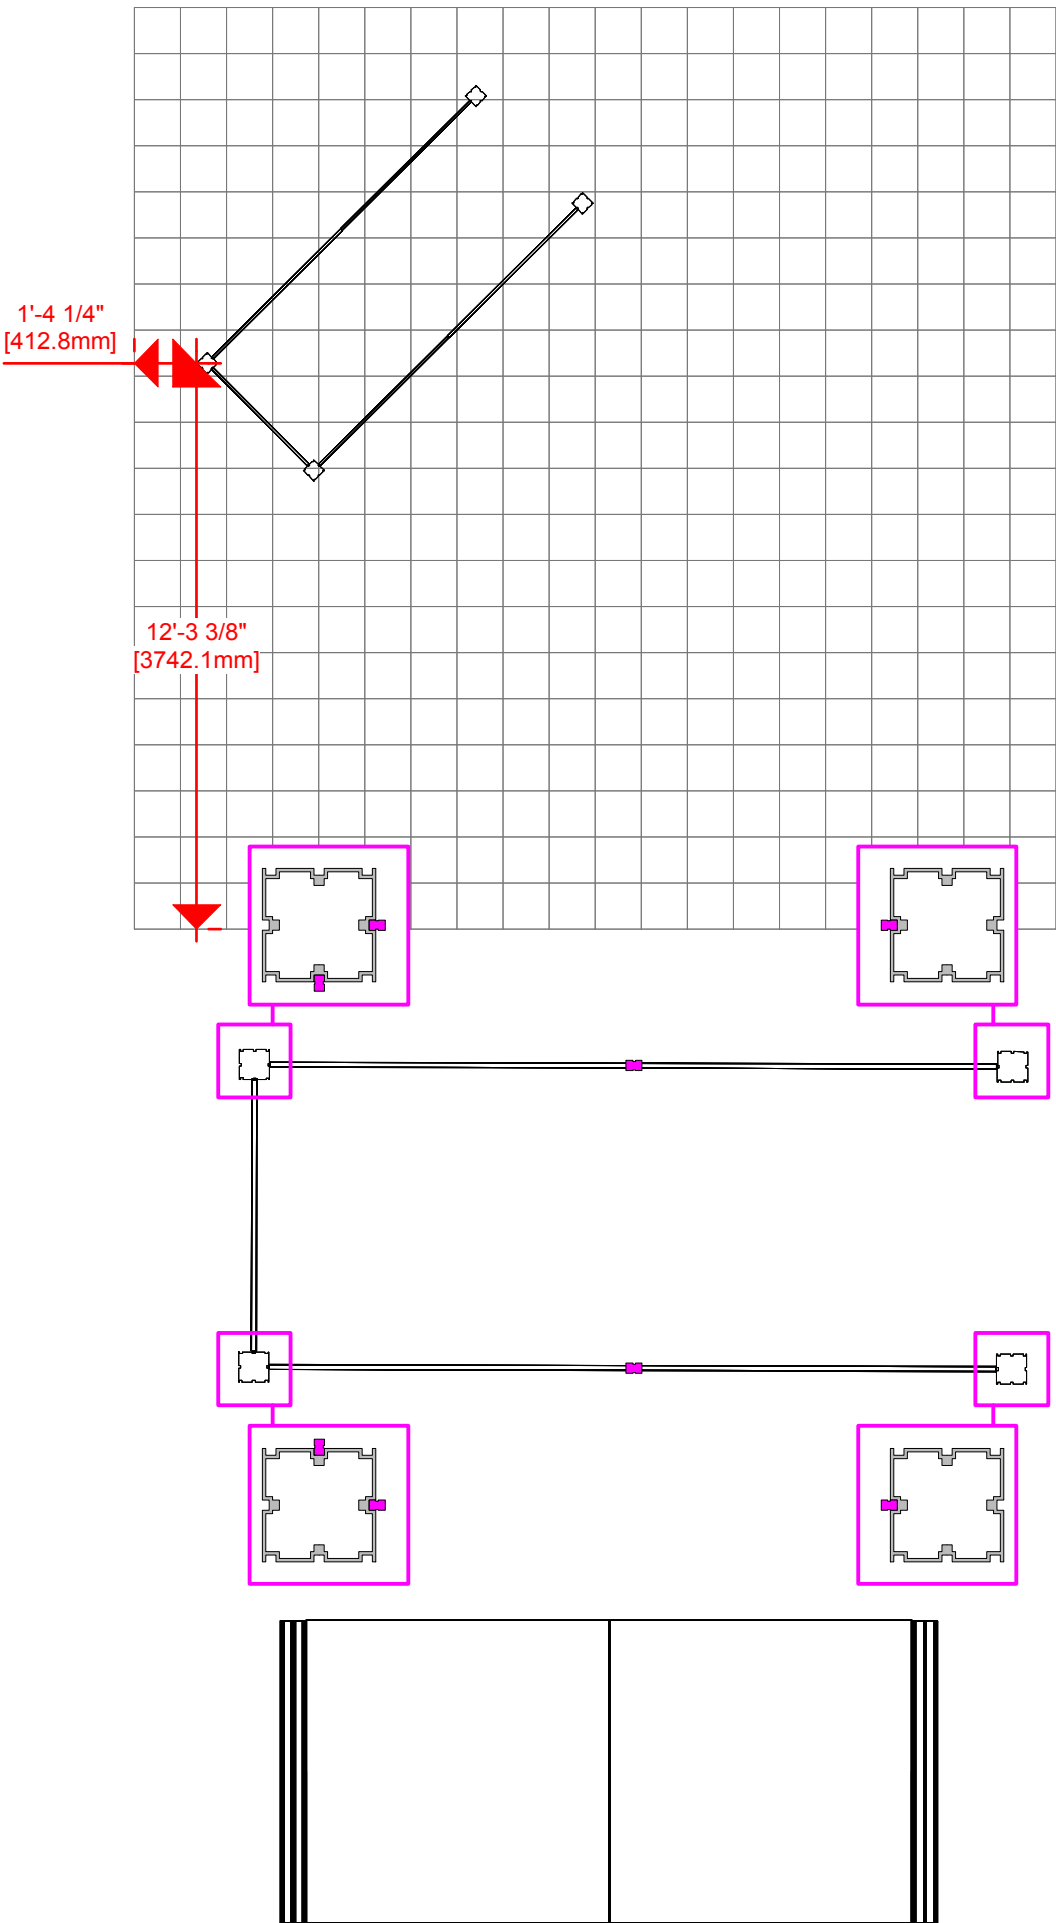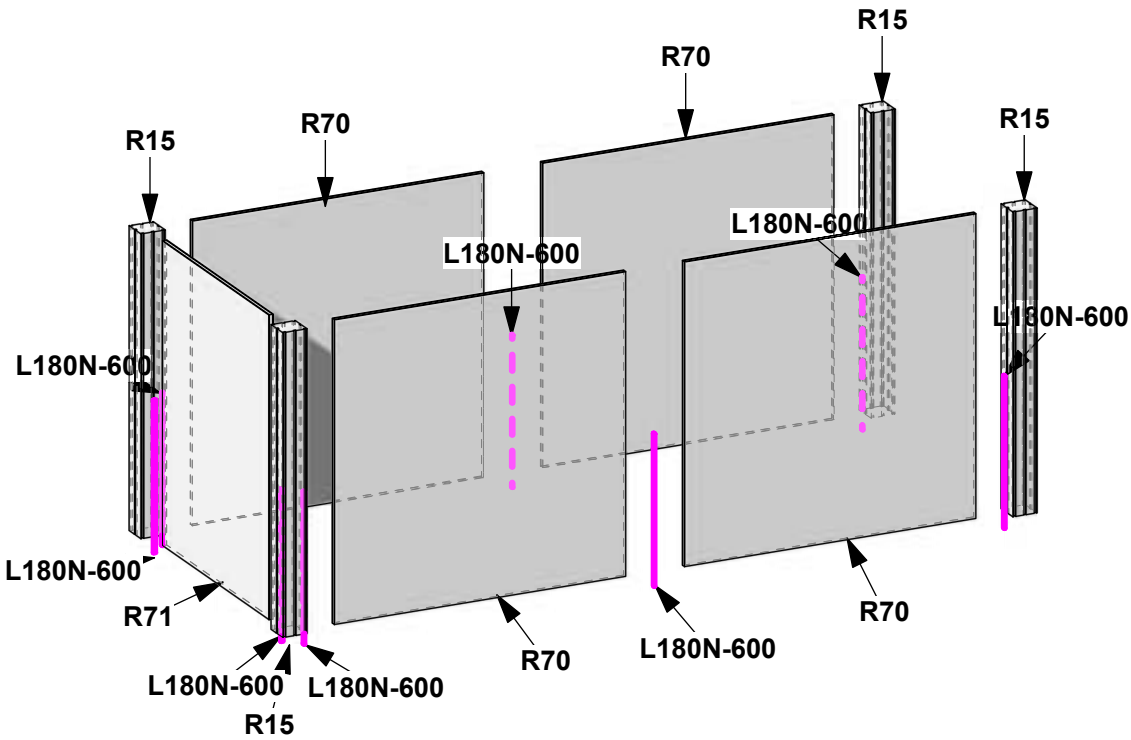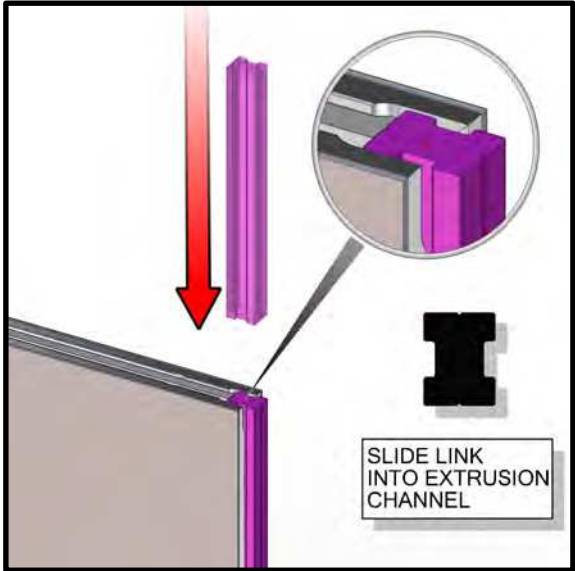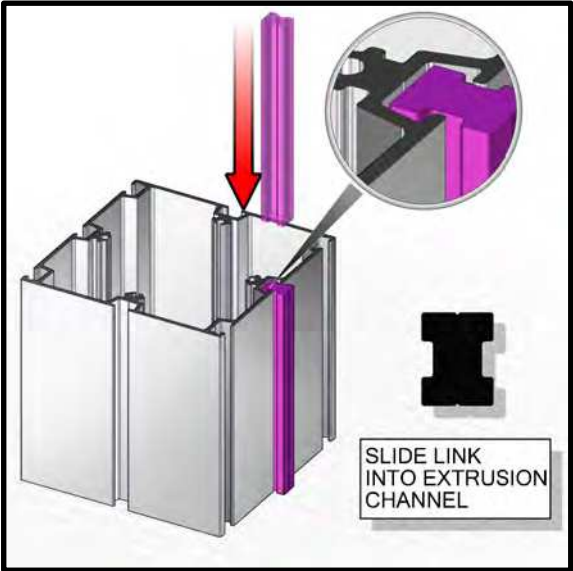


1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")	Phone Line / Fax
2100mm = (82 5/8")	Internet connection
1800mm = (70 7/8")	Outlet
1500mm = (59")	Main Drop (point of distrution)
1200mm = (47 1/4")	
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	

Wire running under carpet





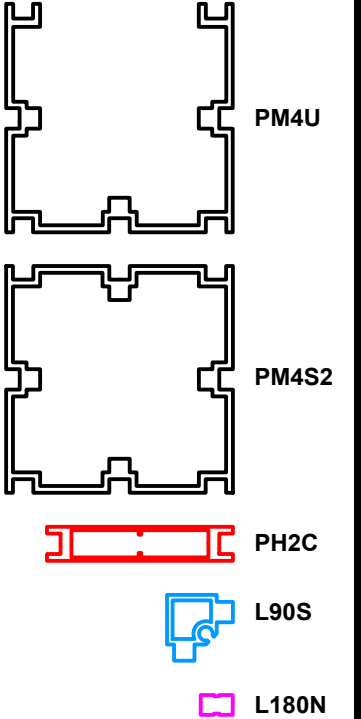


### HYBRID PRO RENTAL KIT

Title: SET-UP INSTRUCTIONS




	Code	#	Description
	R15	4	1200MM PM4S2 SILVER EXTRUSION WITH PH2 STOP AT 302MM
	R13	4	600MM PH2 CONNECTOR WITH TENSION GLIDES
	TC-30MM	4	SILVER ANODIZE FINISH 30MM TUBE CLAMP

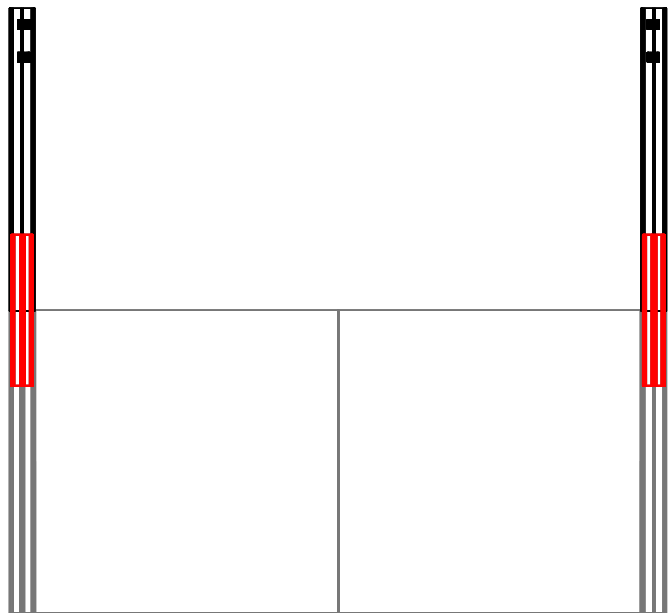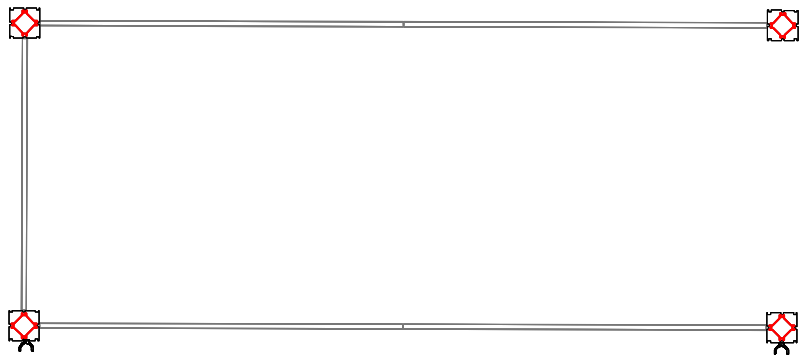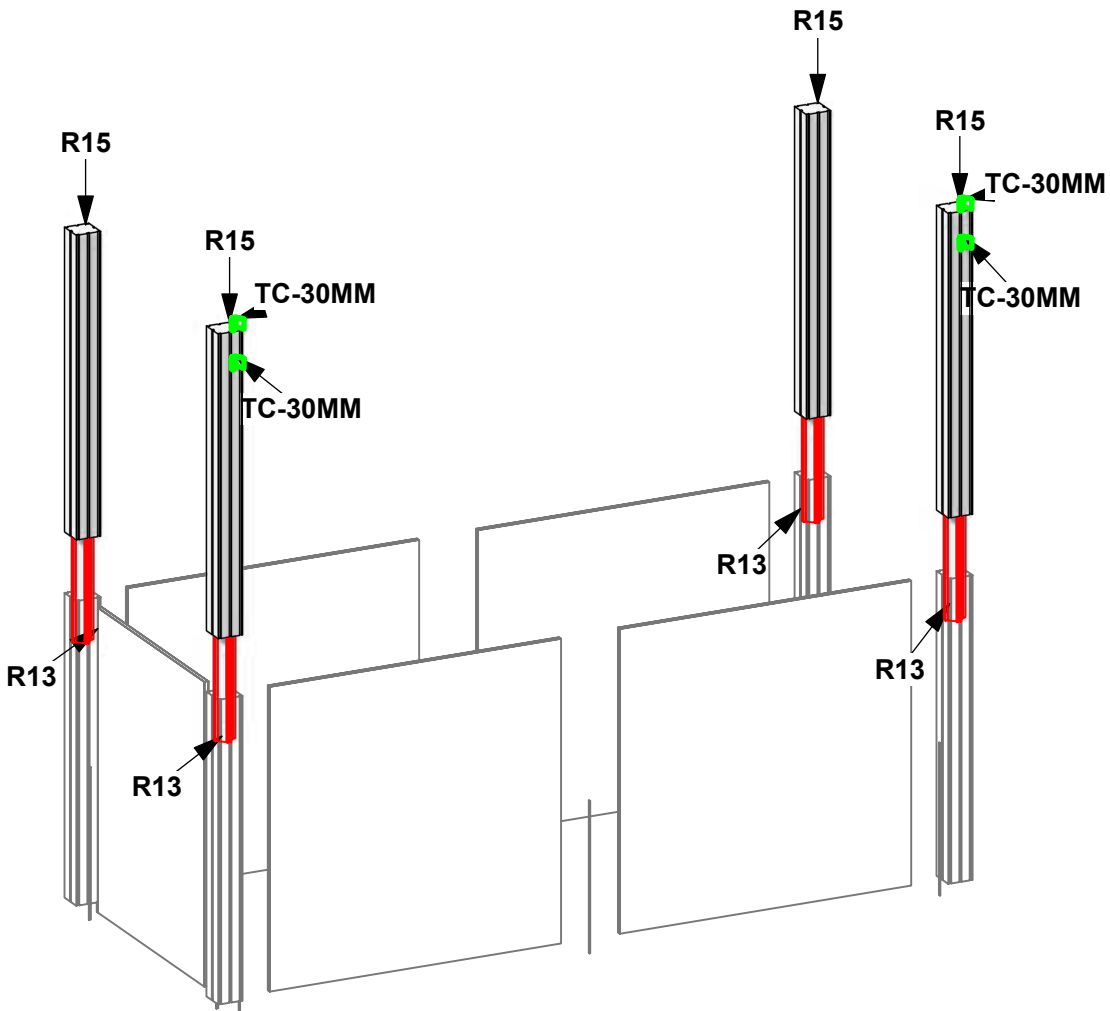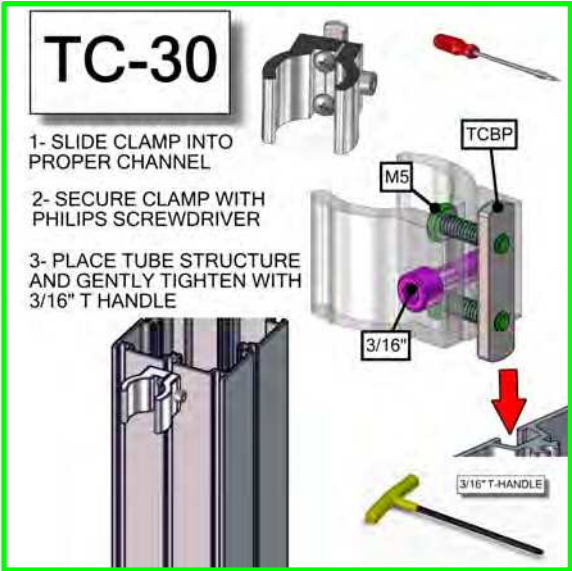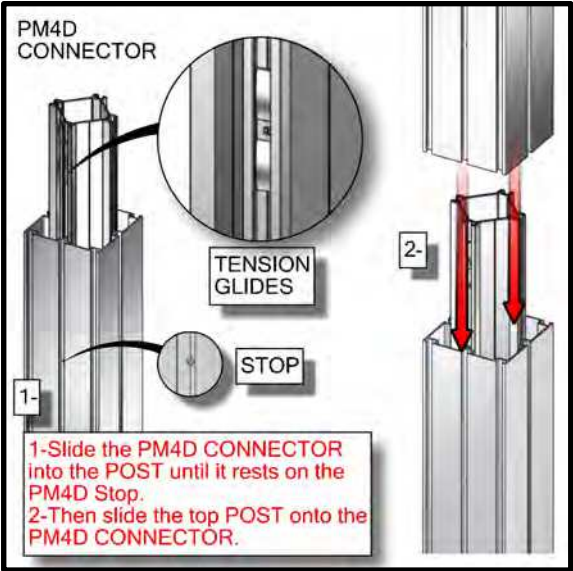

1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")	Phone Line / Fax
2100mm = (82 5/8")	Internet connection
1800mm = (70 7/8")	Outlet
1500mm = (59")	Main Drop (point of distrution)
1200mm = (47 1/4")	
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	

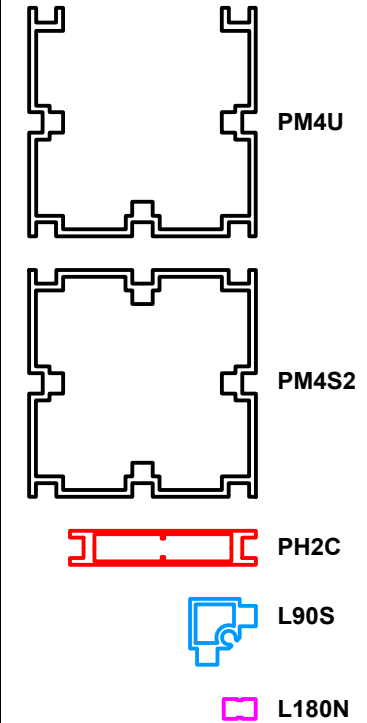


HYBRID PRO RENTAL KIT

Title: SET-UP INSTRUCTIONS


Code	#	Description
R69	1	900MM W x 2400MM V FULL SIZE SPLIT LAMINATE DOOR PANEL
L180N-1200	2	1200MM (47.24") 180N DEGREE SILVER LINK EXTRUSION
L180N-600	4	600MM (23.62") 180N DEGREE SILVER LINK EXTRUSION

STEP 1

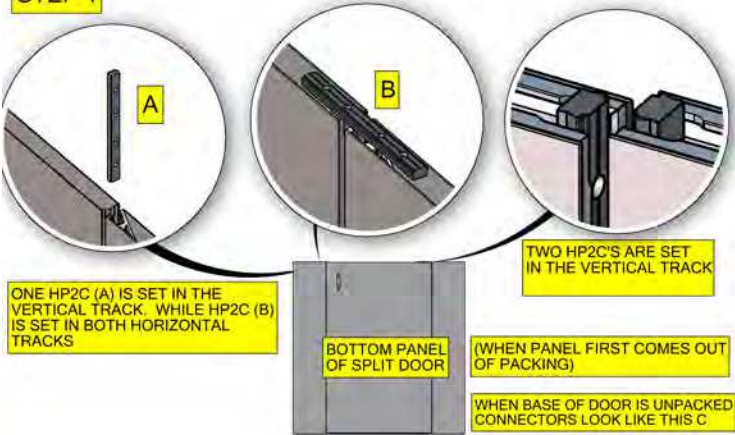




STEP 2

SET BOTH HP2C'S HALFWAY UP IN THE VERTICAL TRACK

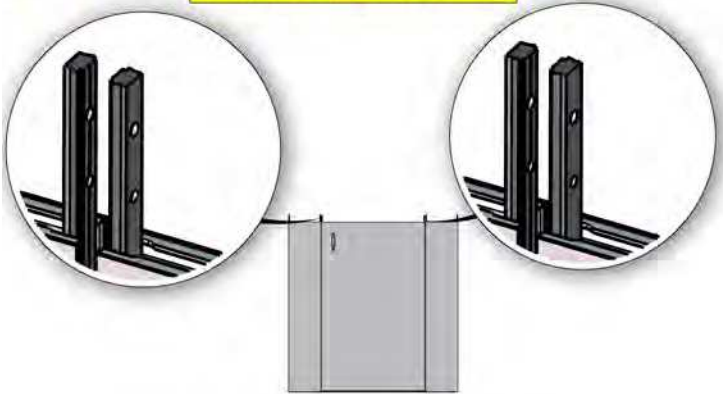

STEP 3

TOP PANEL OF SPLIT DOOR

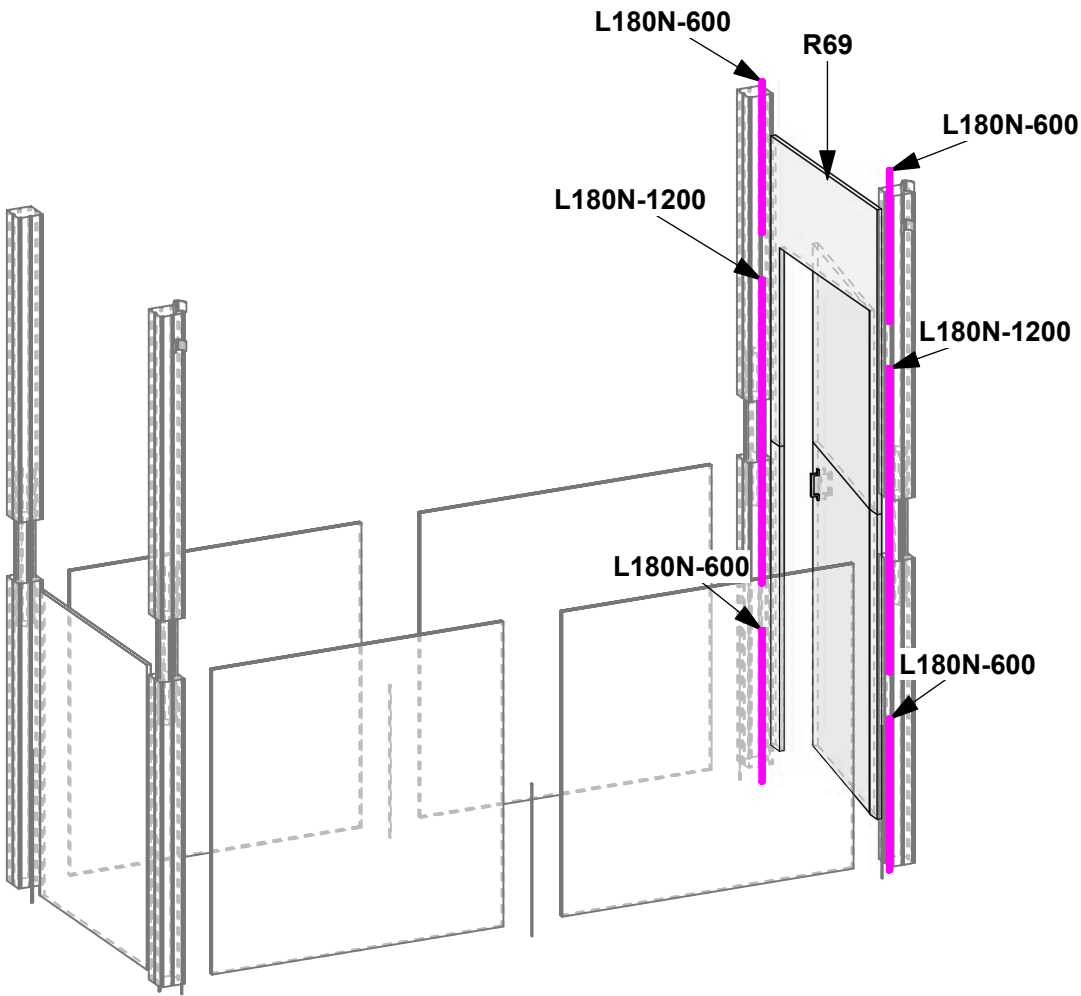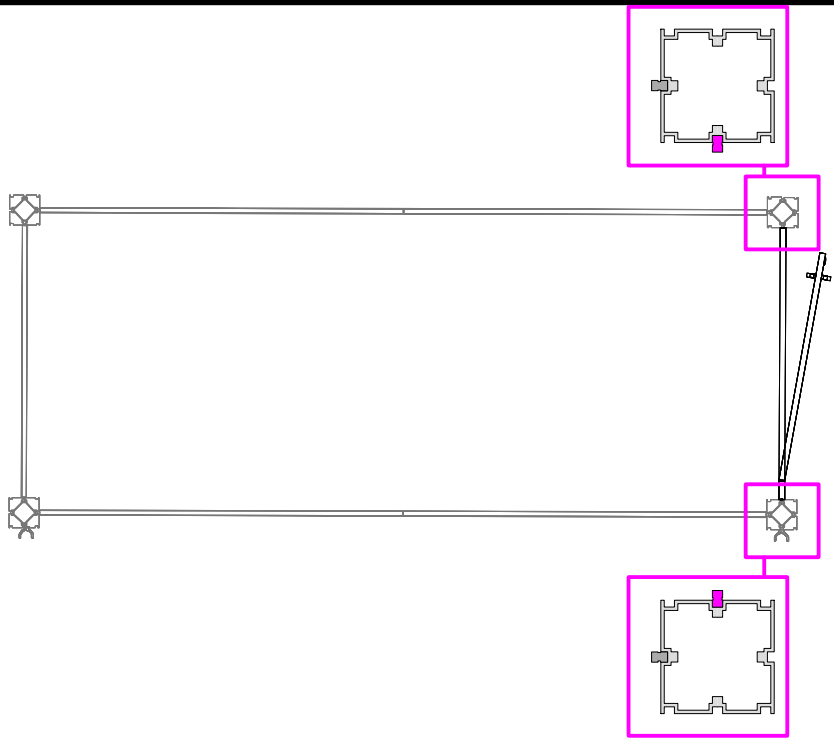
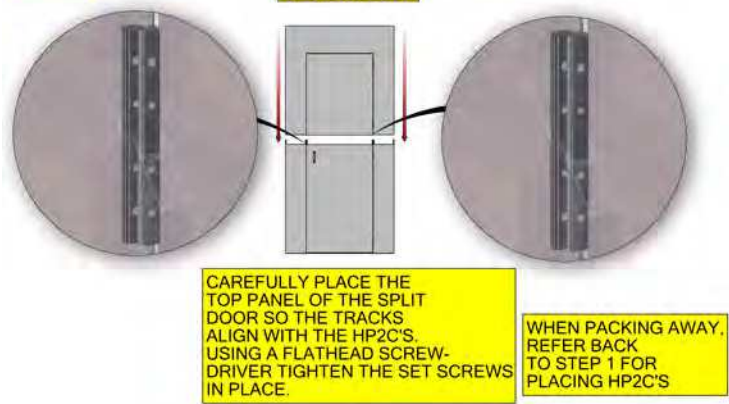


1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")	Phone Line / Fax
2100mm = (82 5/8")	Internet connection
1800mm = (70 7/8")	Outlet
1500mm = (59")	Main Drop (point of distrution)
1200mm = (47 1/4")	
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	






Wire running under carpet

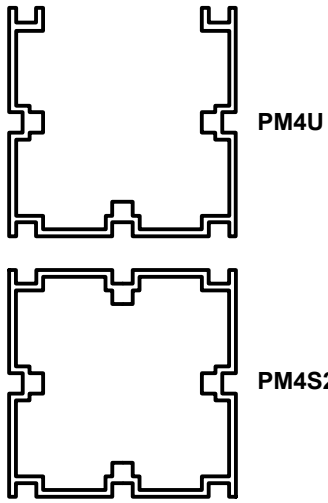

HYBRID PRO RENTAL KIT

Title: SET-UP INSTRUCTIONS

Code	#	Description
R71	1	1200MM V x 900MM W LAMINATE PANEL
R70	4	1200MM V x 1200MM W LAMINATE PANEL
L180N-1200	2	1200MM 180N DEGREE SILVER LINK EXTRUSION
L180N-1200	6	1200MM (47.24") 180N DEGREE SILVER LINK EXTRUSION

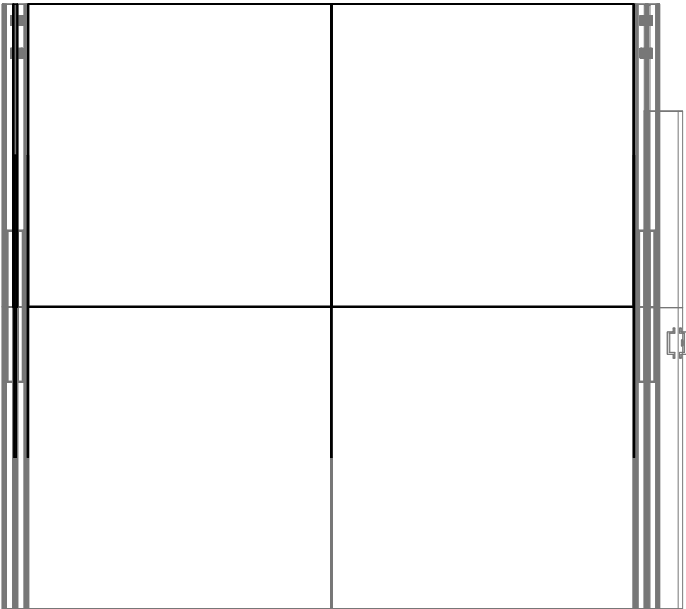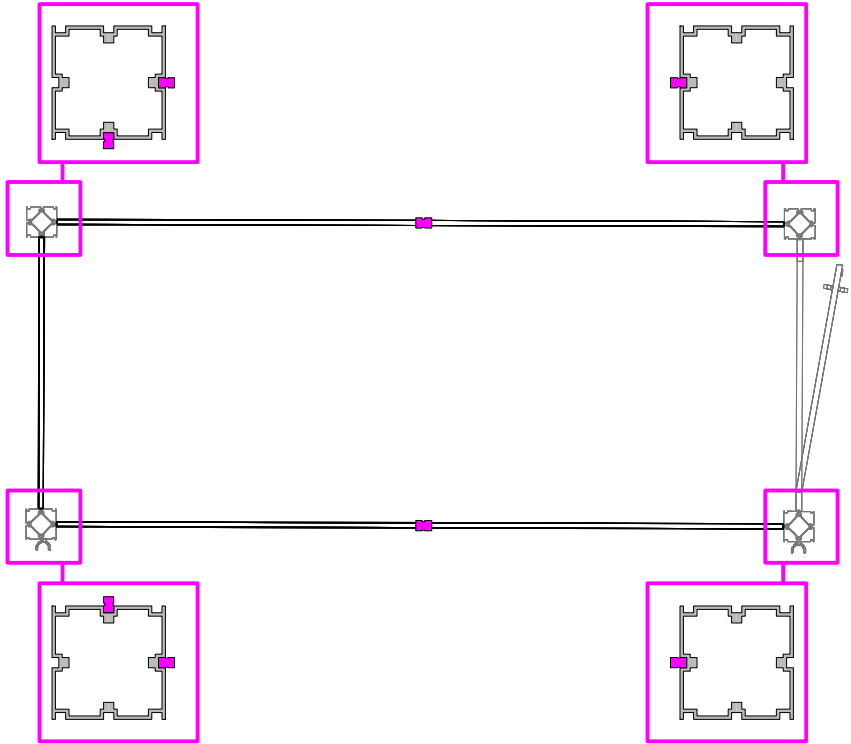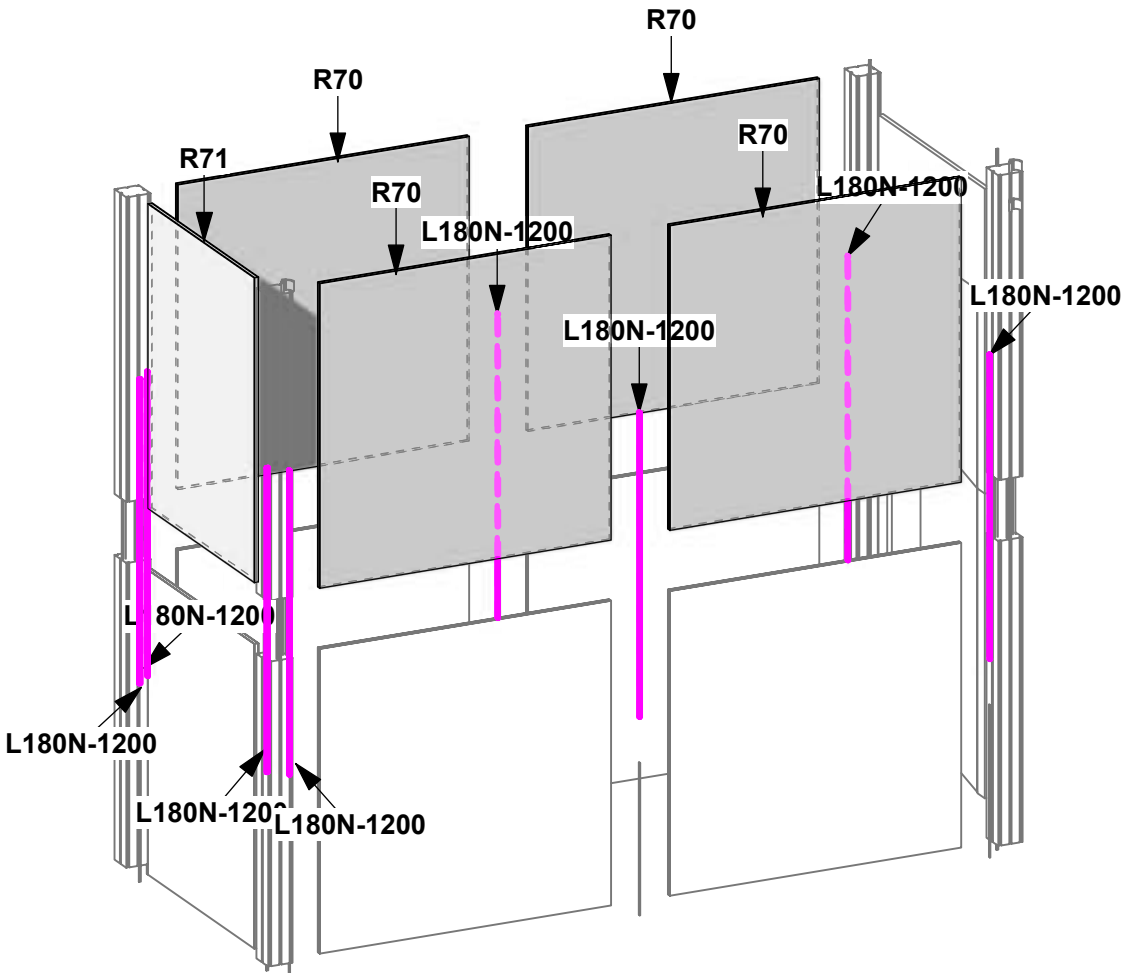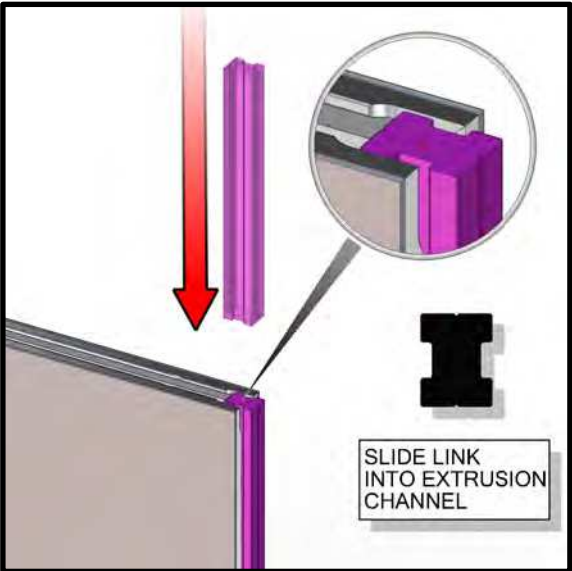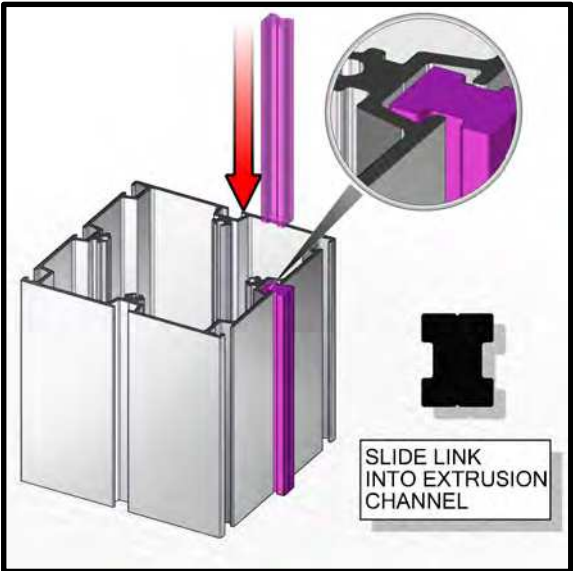


1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.


2400mm = (94 1/2")  
 2100mm = (82 5/8")  
 1800mm = (70 7/8")  
 1500mm = (59")  
 1200mm = (47 1/4")  
 900mm = (35 1/2")  
 600mm = (23 5/8")  
 300mm = (11 7/8")

Phone Line / Fax  
 Internet connection  
 Outlet  
 Main Drop (point of distrution)

Wire running under carpet



PM4U



PM4S2



PH2C



L90S







L180N

HYBRID PRO RENTAL KIT

Title: SET-UP INSTRUCTIONS



Code	#	Description
R15	4	1200MM PM4S2 SILVER EXTRUSION WITH PH2 STOP AT 302MM
R13	4	600MM PH2 CONNECTOR WITH TENSION GLIDES

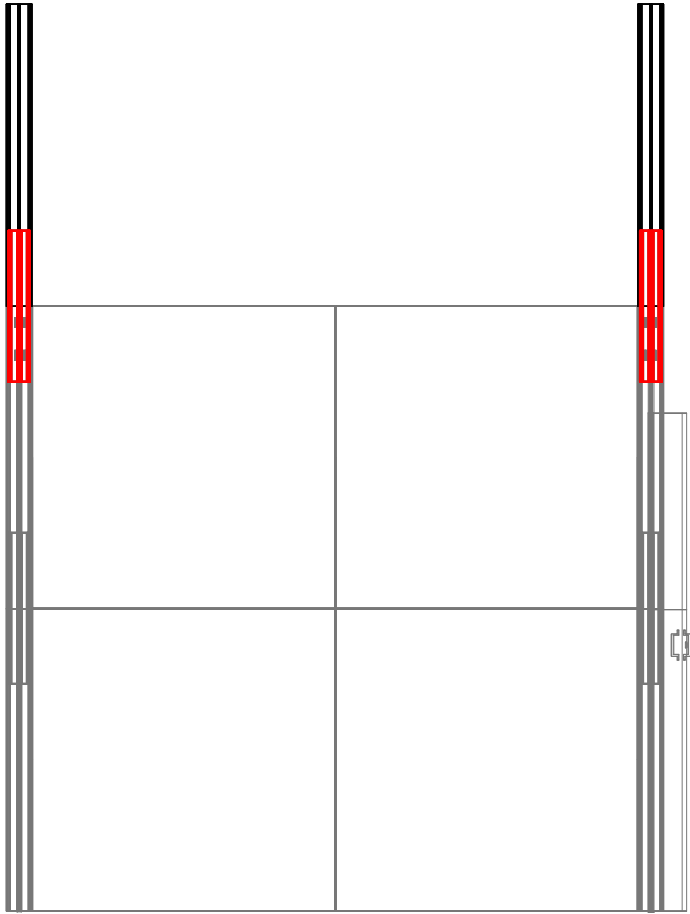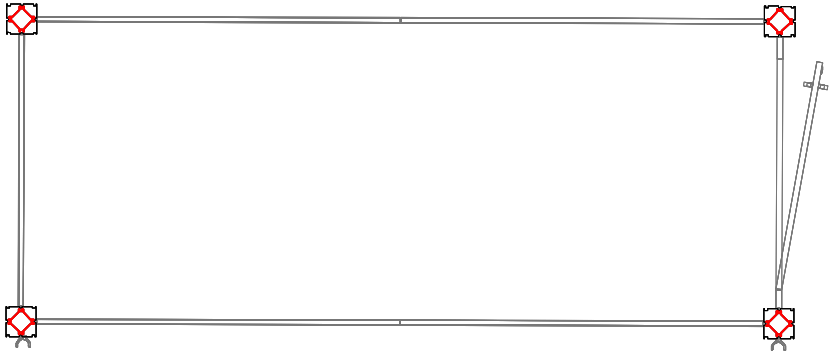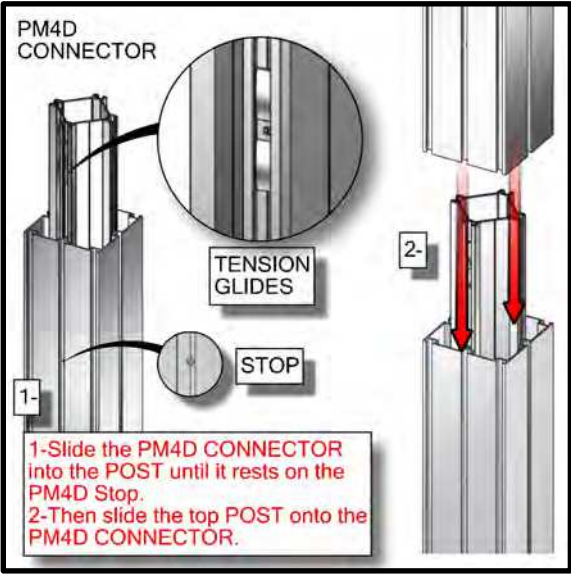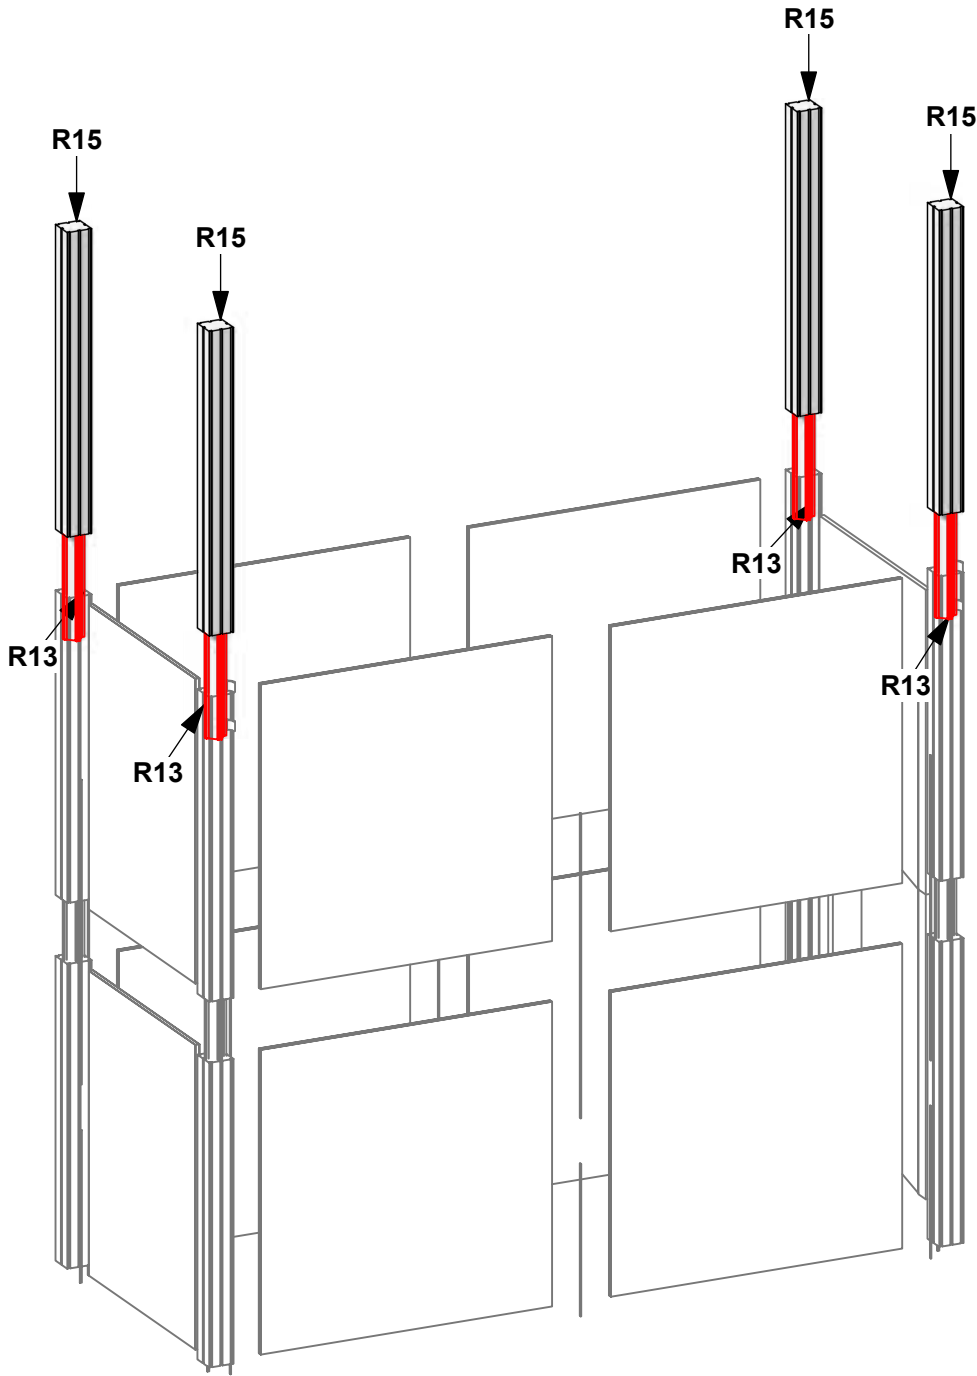


1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")  
2100mm = (82 5/8")  
1800mm = (70 7/8")  
1500mm = (59")  
1200mm = (47 1/4")  
900mm = (35 1/2")  
600mm = (23 5/8")  
300mm = (11 7/8")






Phone Line / Fax  
 Internet connection  
 Outlet  
 Main Drop (point of distrution)  
 Wire running under carpet

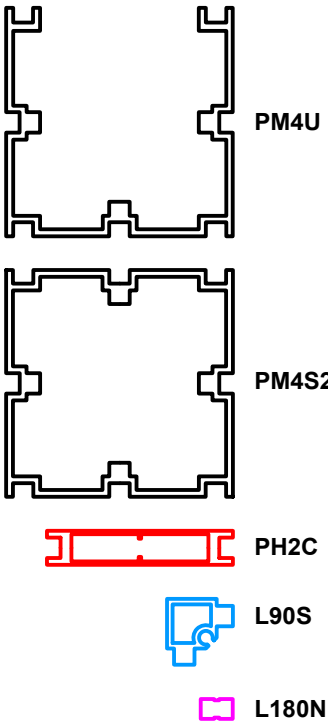

HYBRID PRO RENTAL KIT

Title: SET-UP INSTRUCTIONS

Code	#	Description
L180N-600	2	600MM 180N DEGREE SILVER LINK EXTRUSION
L180N-600	6	600MM (23.62") 180N DEGREE SILVER LINK EXTRUSION

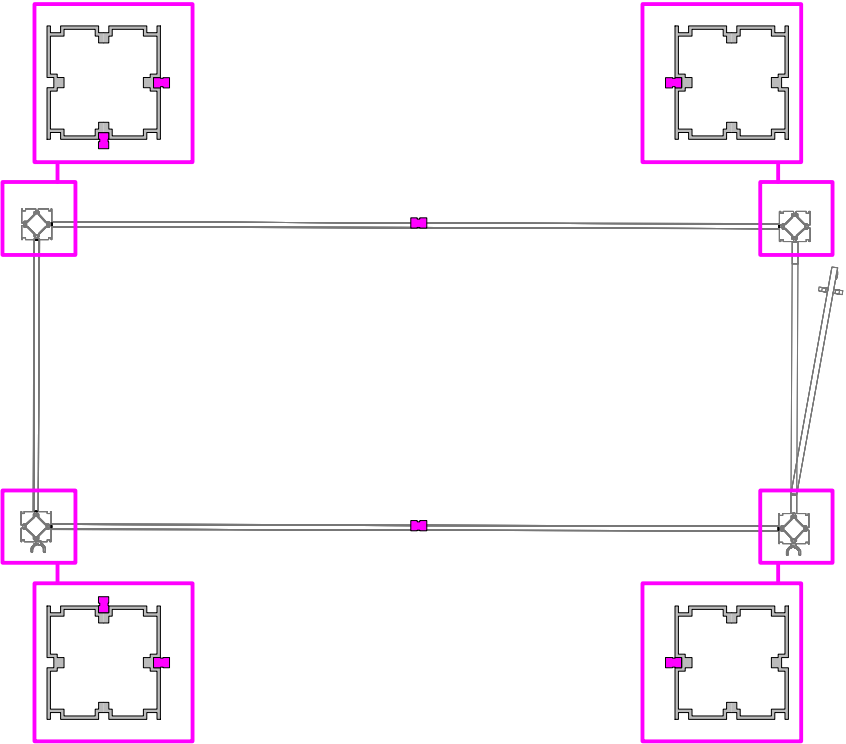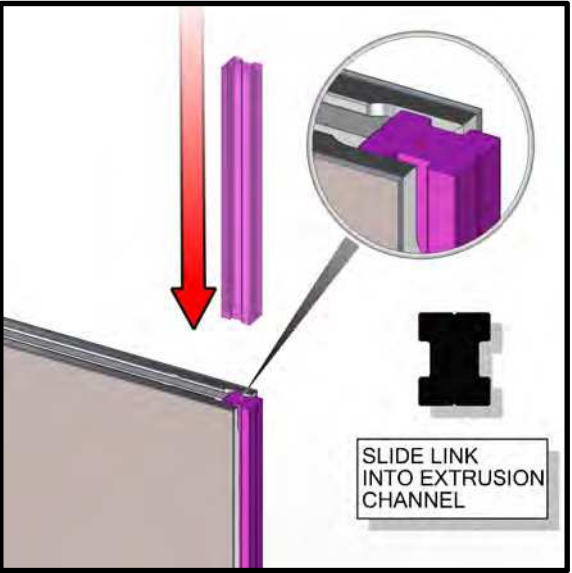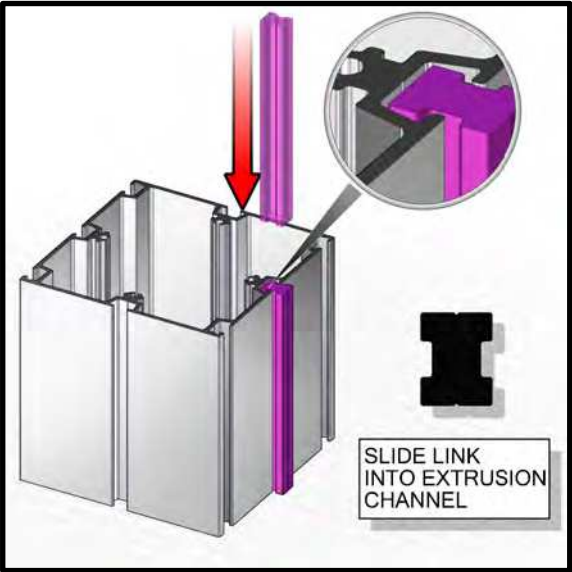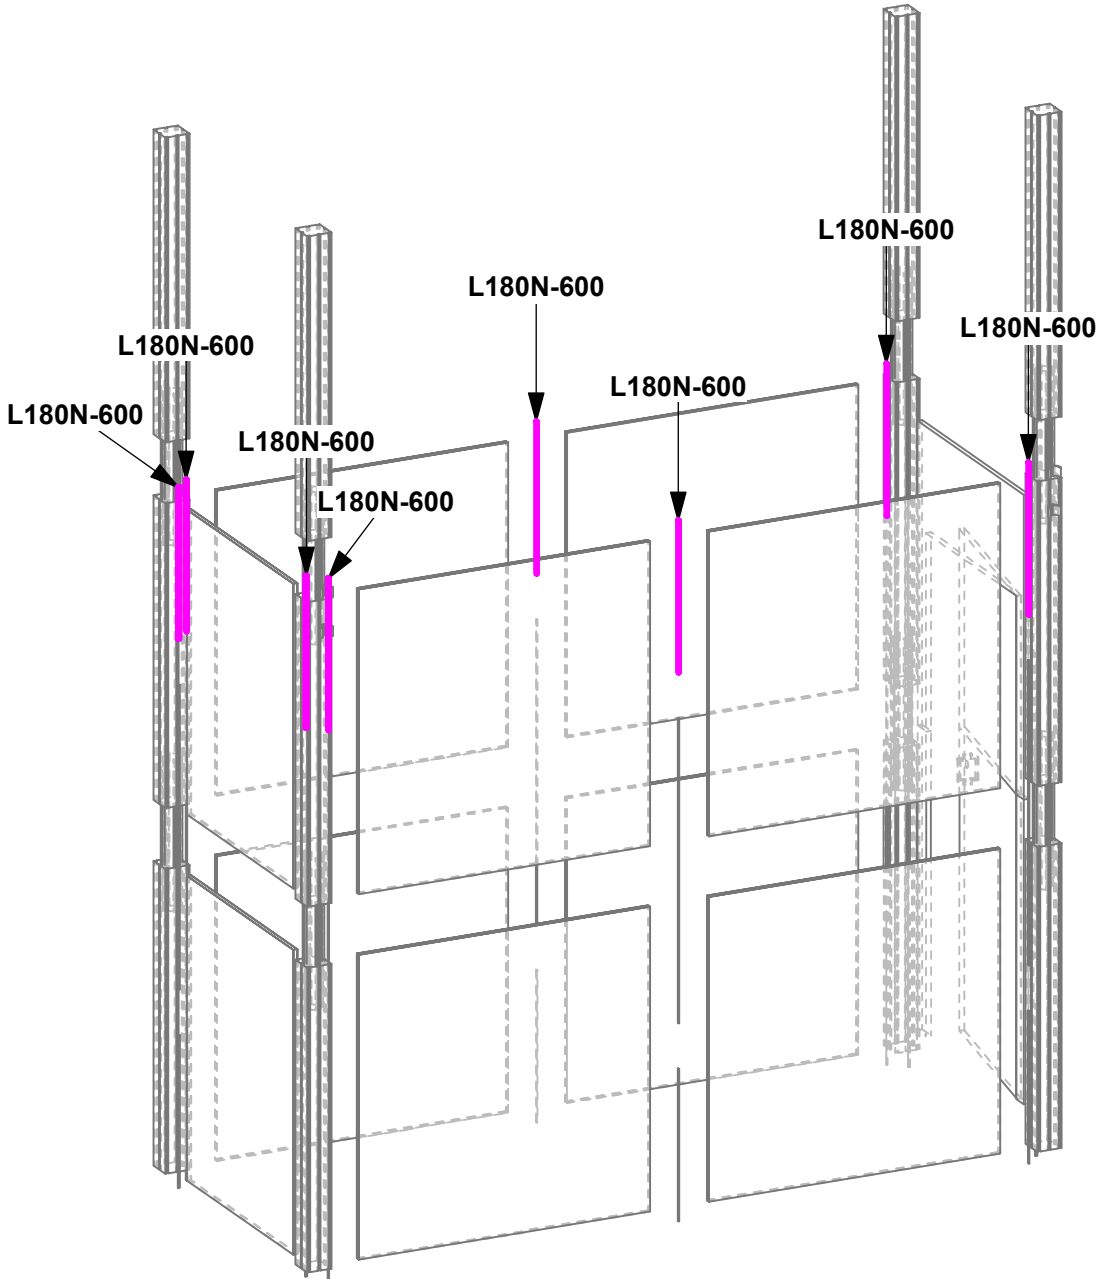


1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")	Phone Line / Fax
2100mm = (82 5/8")	Internet connection
1800mm = (70 7/8")	Outlet
1500mm = (59")	Main Drop (point of distrution)
1200mm = (47 1/4")	
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	

Wire running under carpet

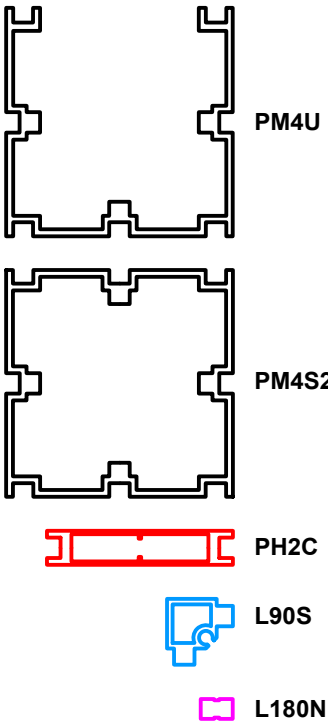

HYBRID PRO RENTAL KIT

Title: SET-UP INSTRUCTIONS

	Code	#	Description
	R67	2	900MM PM4S2 SILVER EXTRUSION WITH LOCKS BOTH ENDS

1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")	Phone Line / Fax
2100mm = (82 5/8")	Internet connection
1800mm = (70 7/8")	Outlet
1500mm = (59")	Main Drop (point of distrution)
1200mm = (47 1/4")	
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	

Wire running under carpet

PM4U

PM4S2


PH2C

L90S





L180N

HYBRID PRO RENTAL KIT






Title: SET-UP INSTRUCTIONS

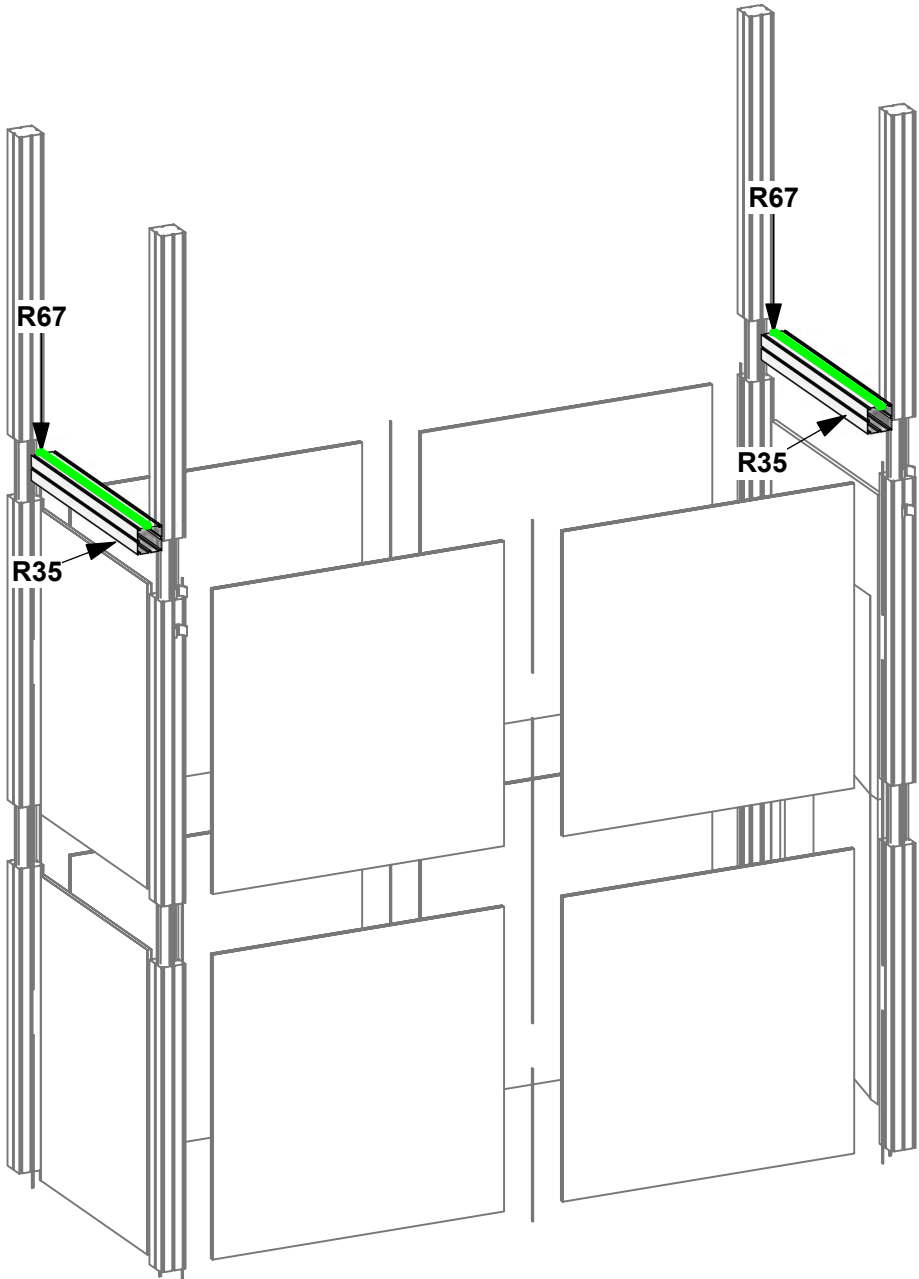

NOTE: MAKE SURE TO SLIDE FC EXTRUSION BEFORE

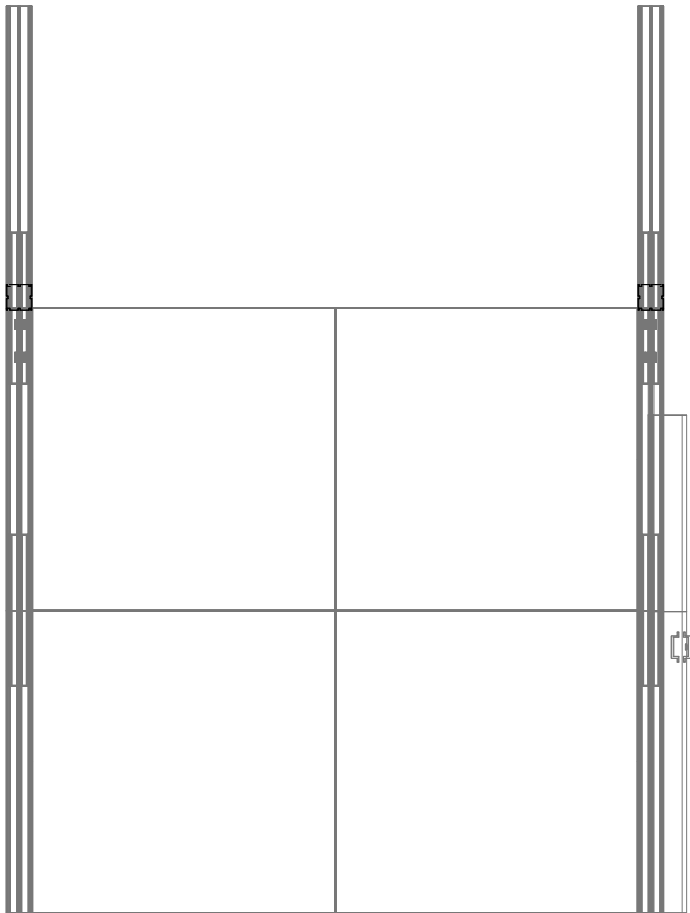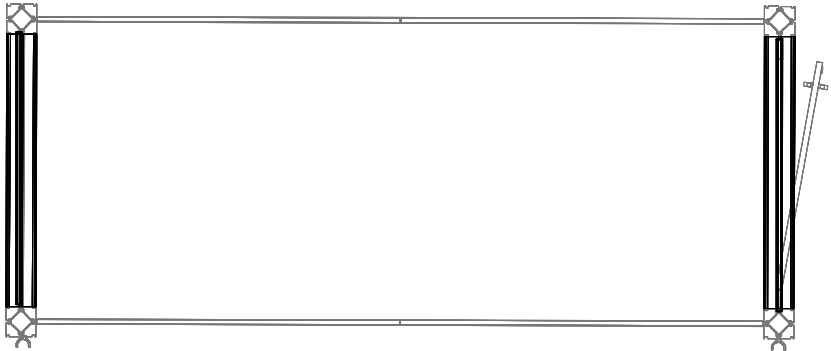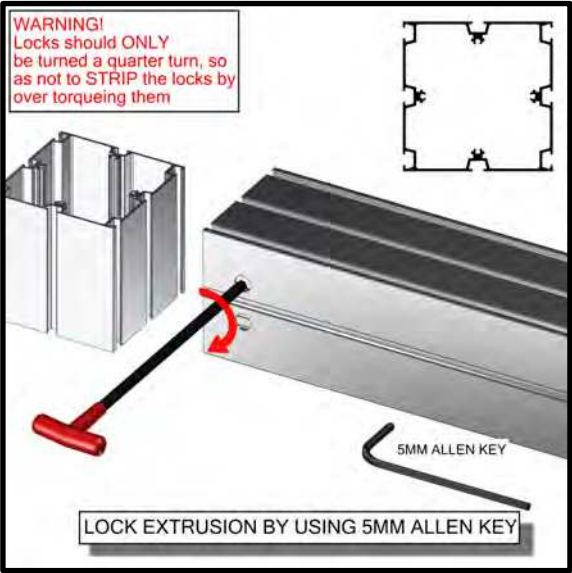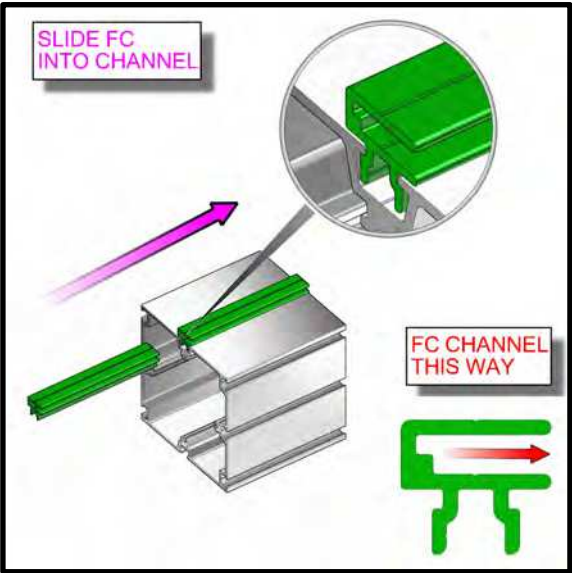

Code	#	Description
R15	4	1200MM PM4S2 SILVER EXTRUSION WITH PH2 STOP AT 302MM
R13	4	600MM PH2 CONNECTOR WITH TENSION GLIDES
TC-30MM	8	SILVER ANODIZE FINISH 30MM TUBE CLAMP

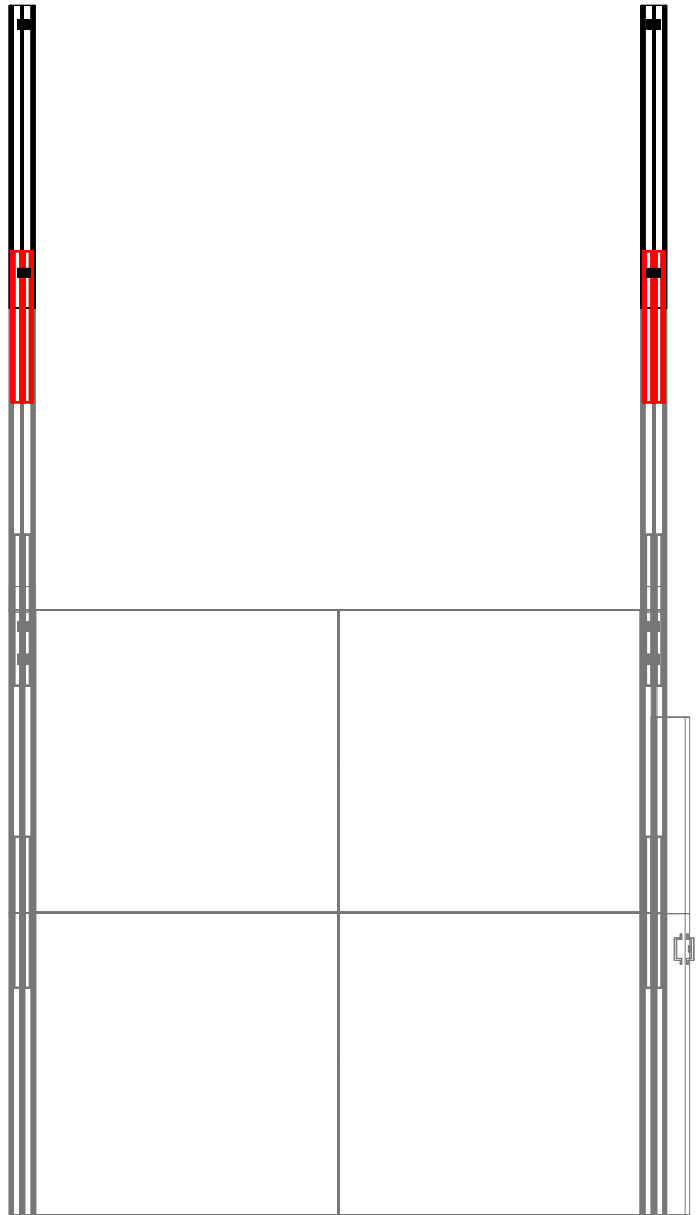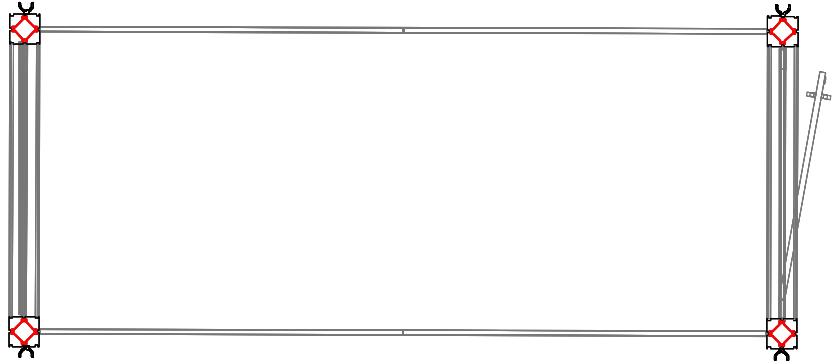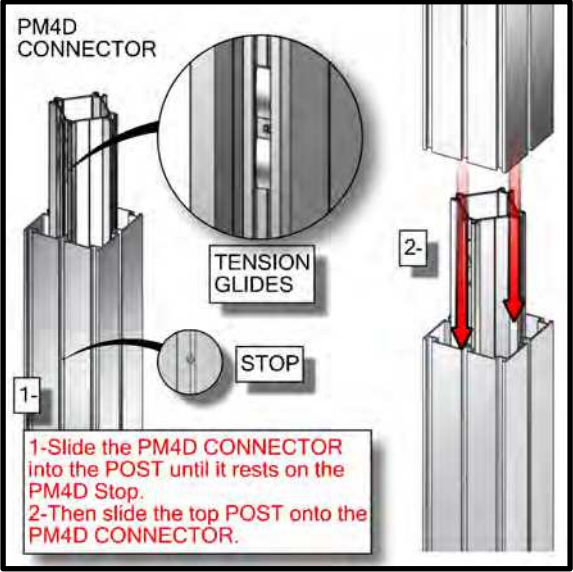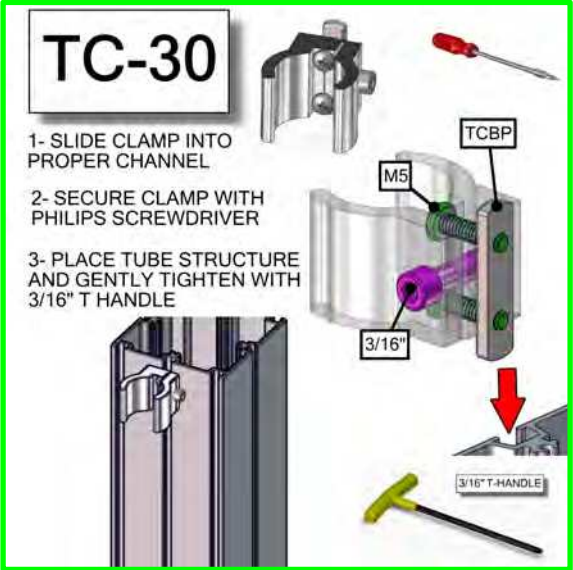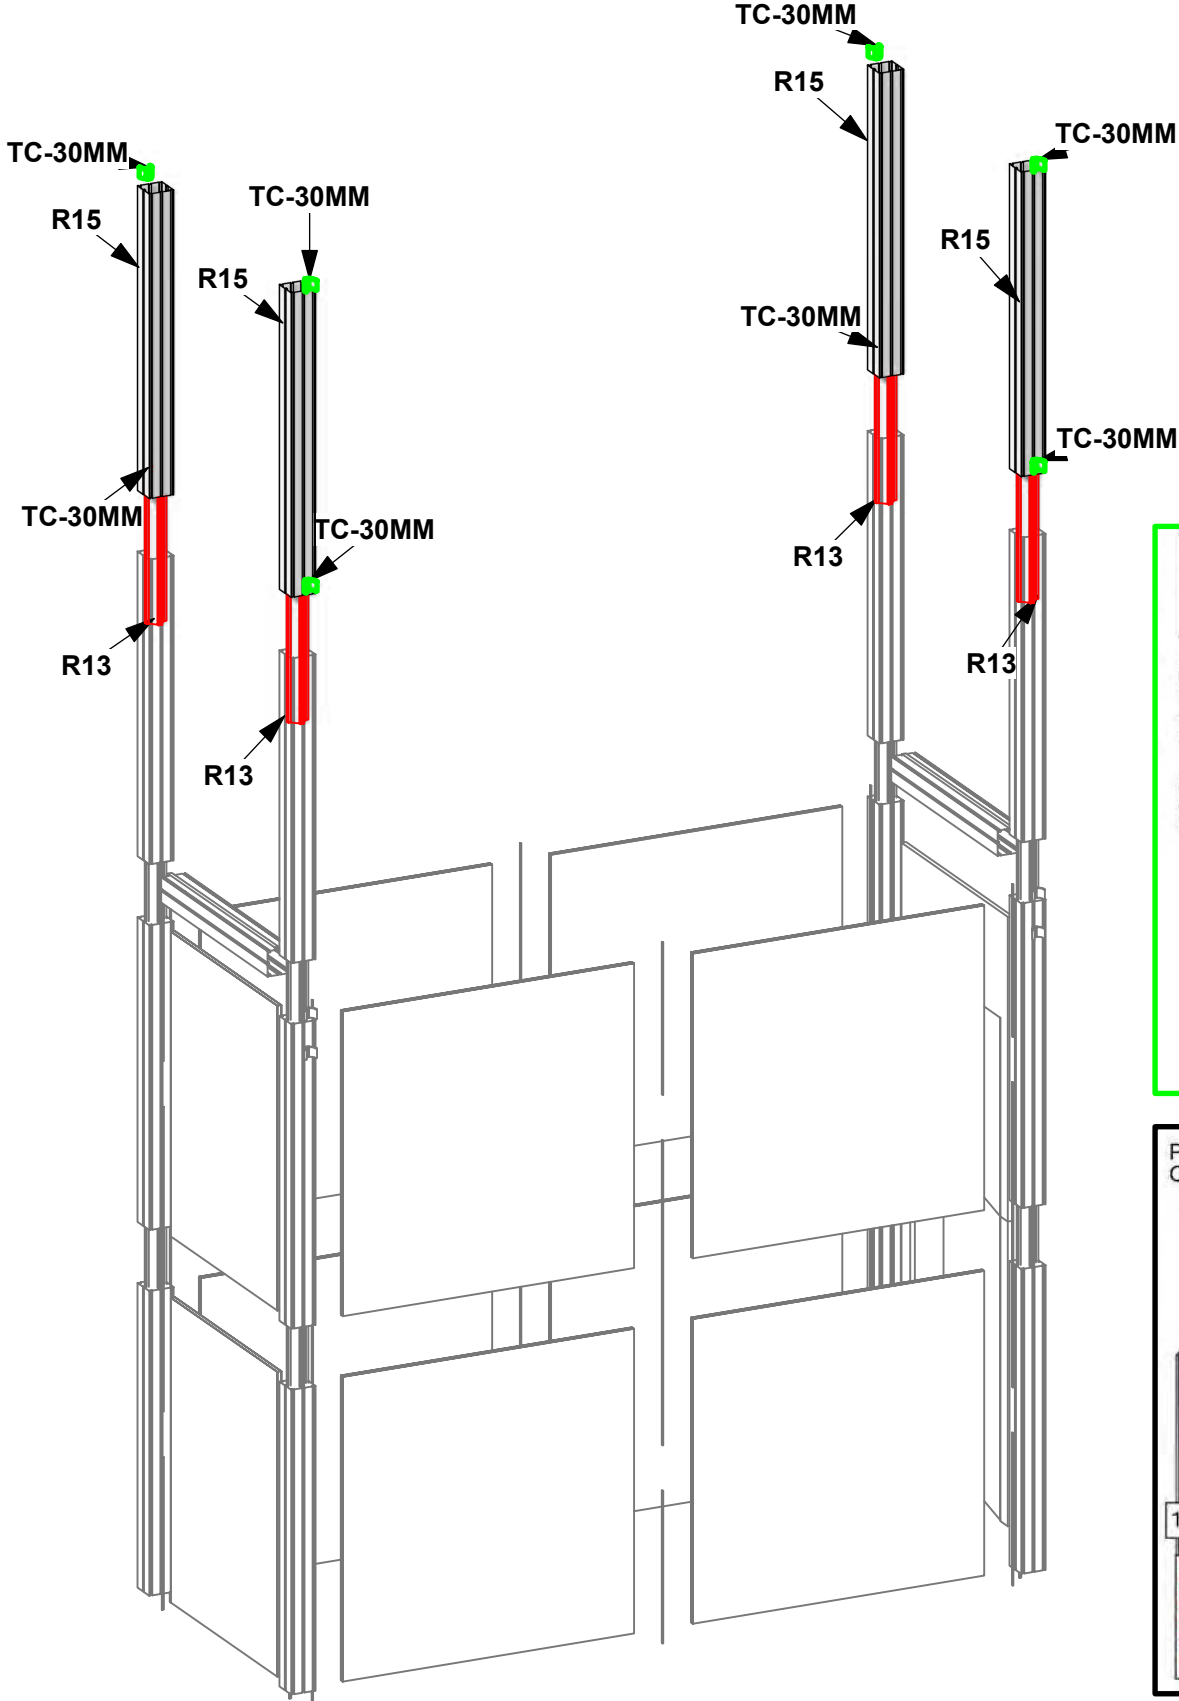


1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.


2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")	Phone Line / Fax
2100mm = (82 5/8")	Internet connection
1800mm = (70 7/8")	Outlet
1500mm = (59")	Main Drop (point of distrution)
1200mm = (47 1/4")	
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	

Wire running under carpet



PM4U



PM4S2



PH2C



L90S




L180N

## HYBRID PRO RENTAL KIT





Title: SET-UP INSTRUCTIONS



Code	#	Description
R66	2	900MM PM4U SILVER EXTRUSION WITH LOCKS BOTH ENDS

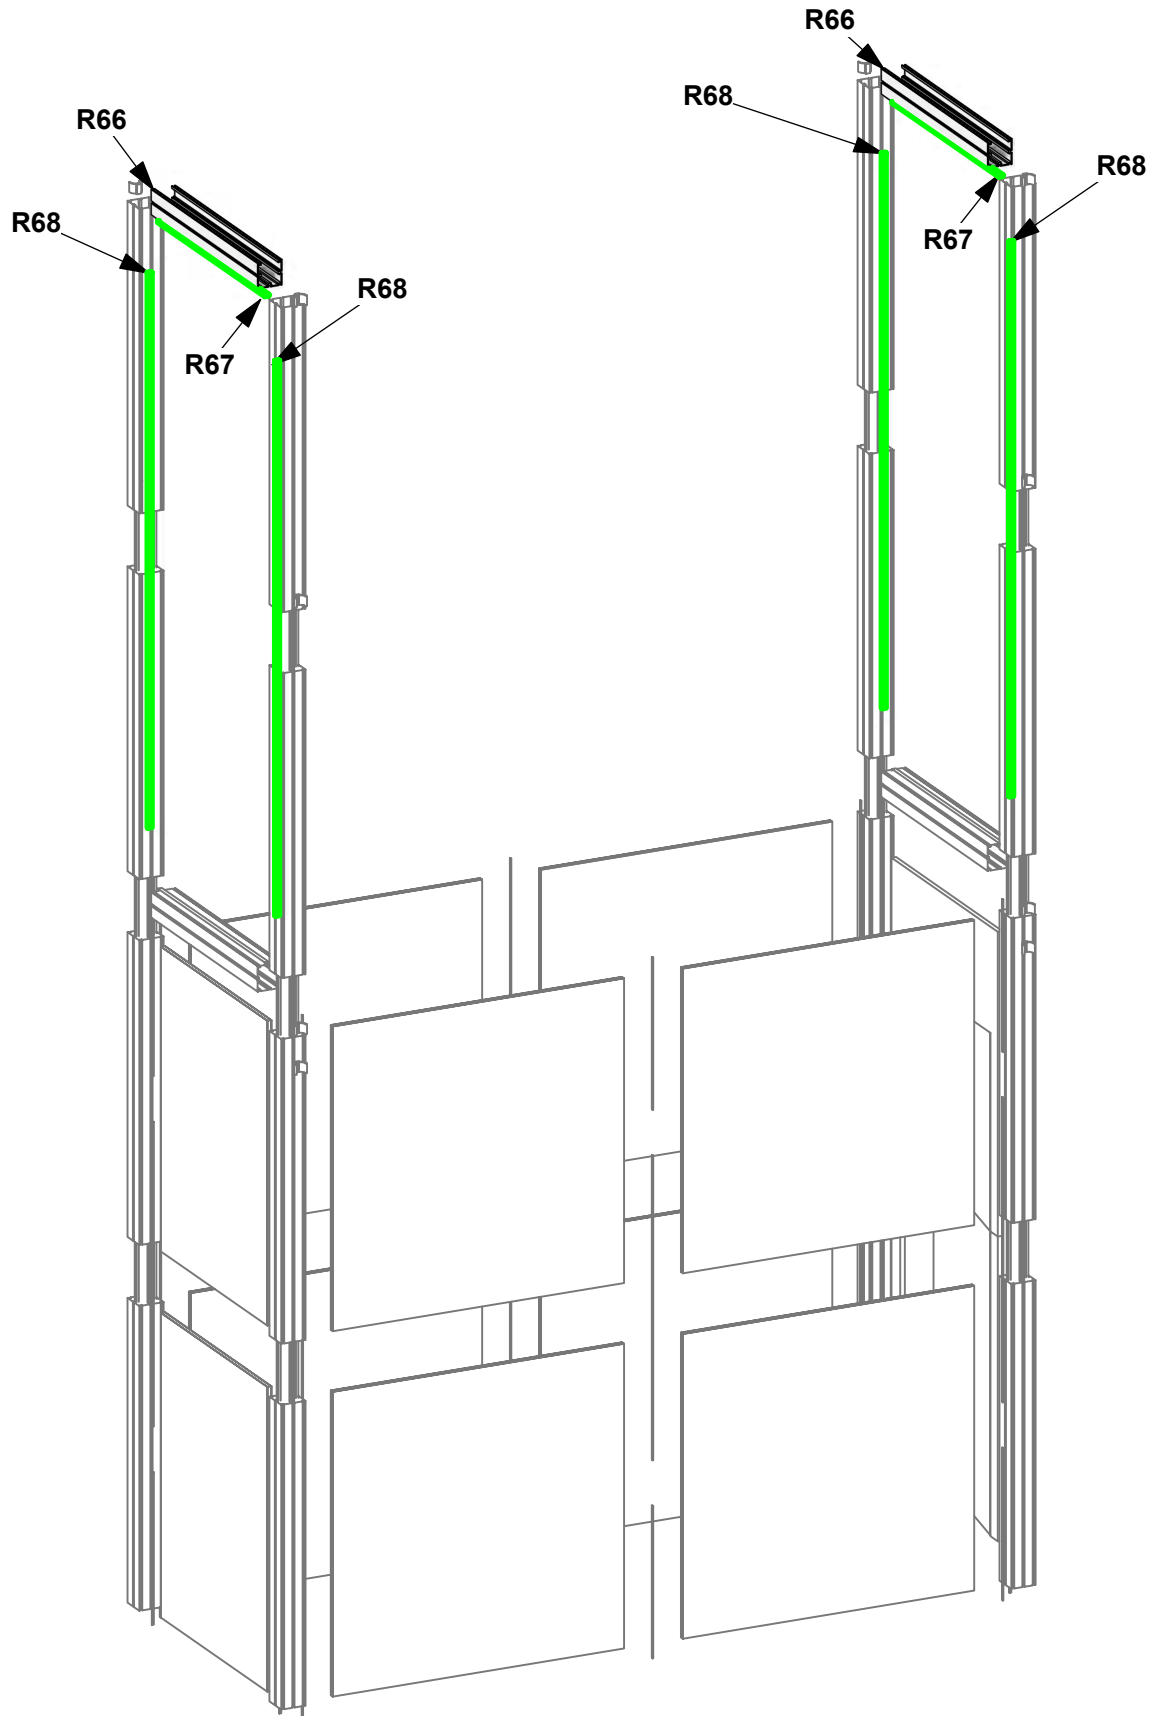

NOTE: MAKE SURE TO SLIDE FC EXTRUSION BEFORE

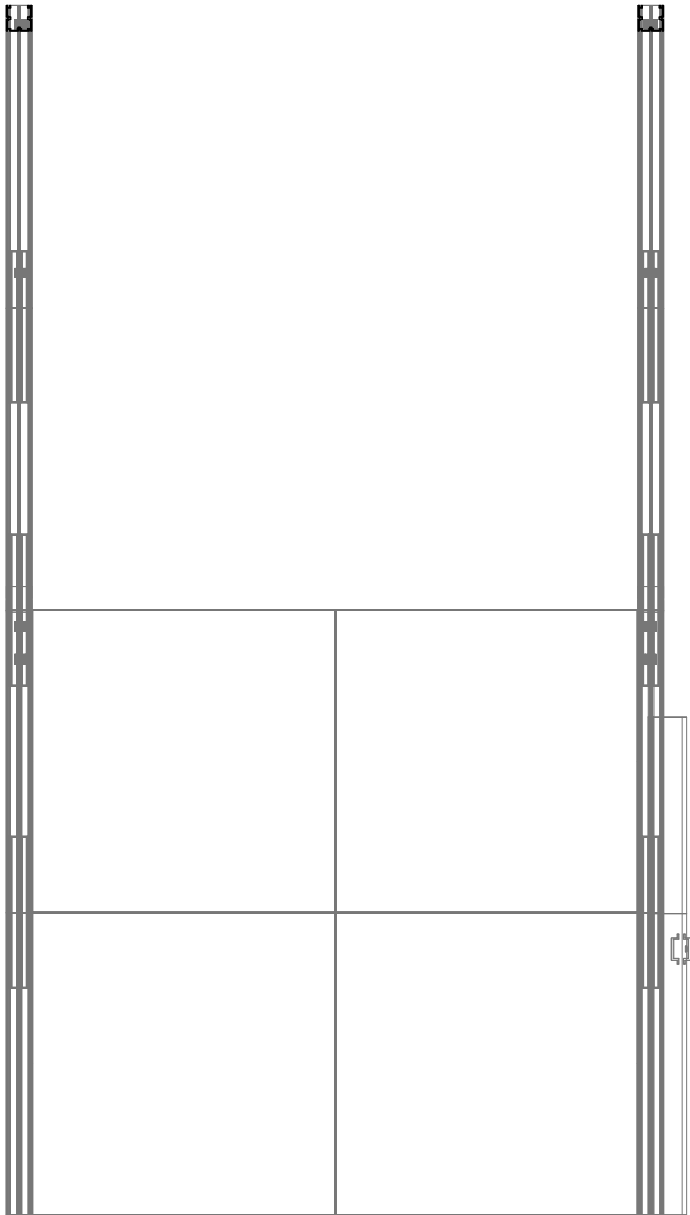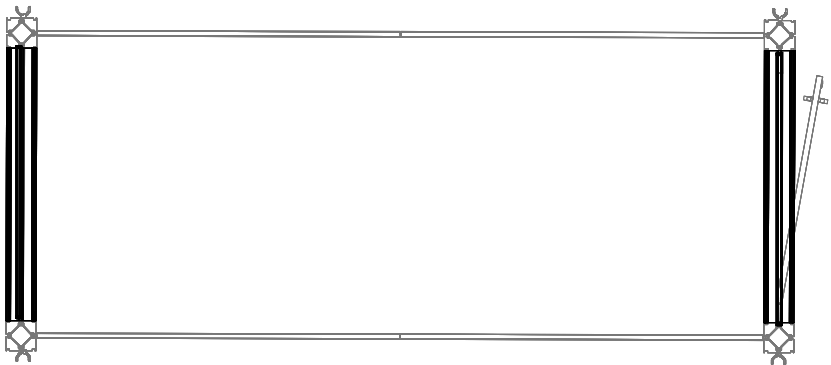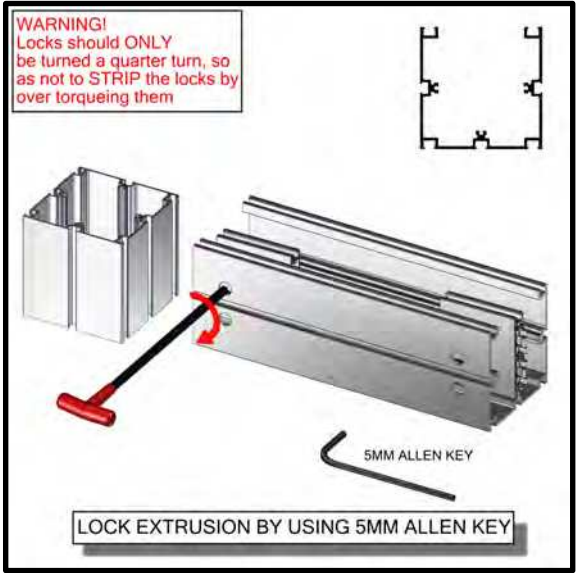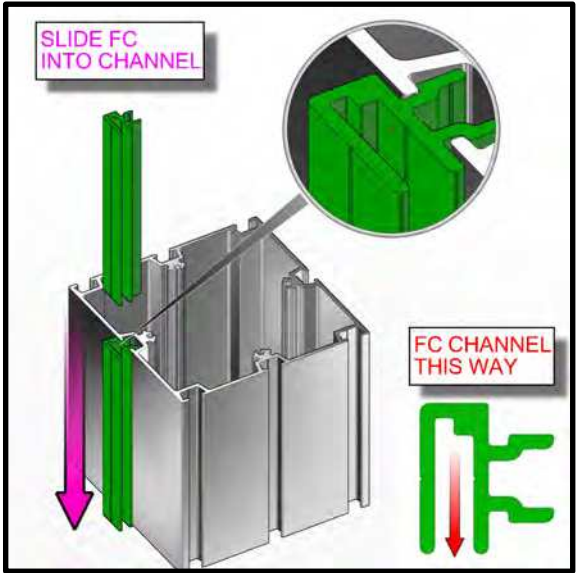


1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")	Phone Line / Fax
2100mm = (82 5/8")	Internet connection
1800mm = (70 7/8")	Outlet
1500mm = (59")	Main Drop (point of distrution)
1200mm = (47 1/4")	
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	





Wire running under carpet

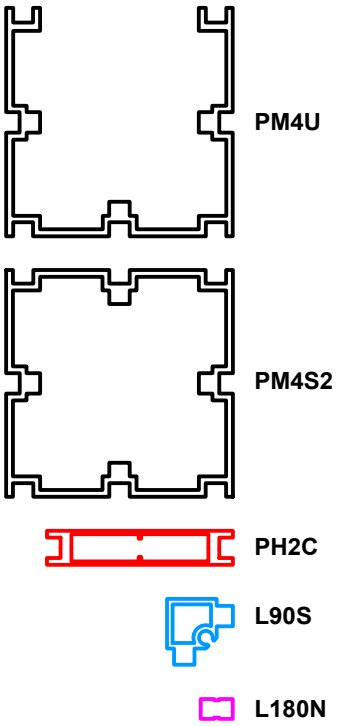

HYBRID PRO RENTAL KIT


Title: SET-UP INSTRUCTIONS

	Code	#	Description
	GRAPHIC B1	1	86.37" X 35.43" SINGLE SIDED DYESUB GRAPHIC W/ 8MM POLE POCKETS T&B
	GRAPHIC B2	1	86.37" X 35.43" SINGLE SIDED DYESUB GRAPHIC W/ 8MM POLE POCKETS T&B

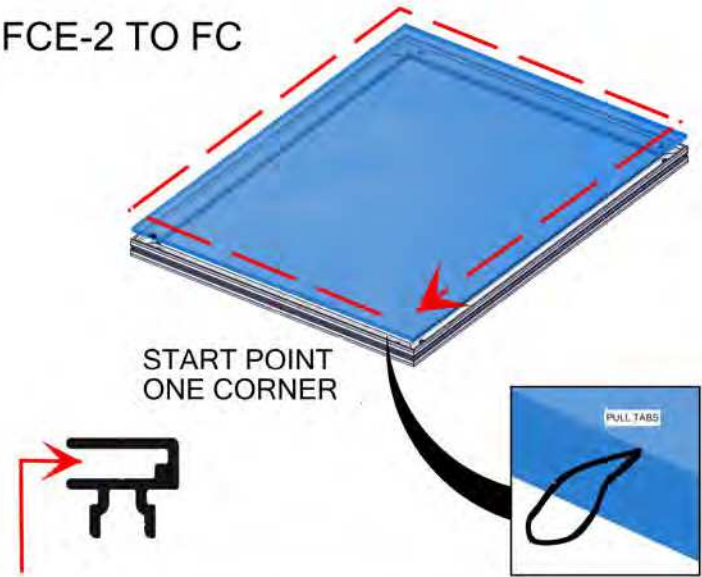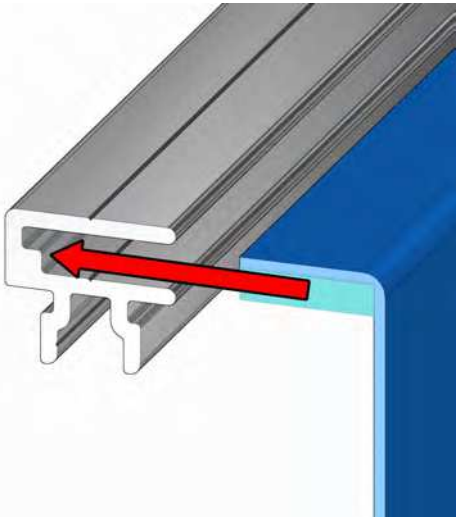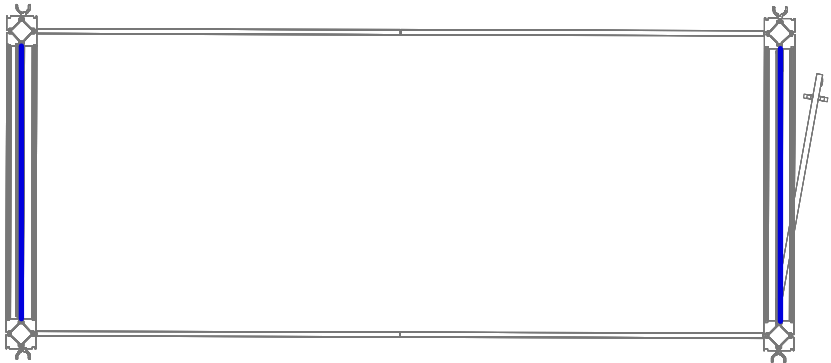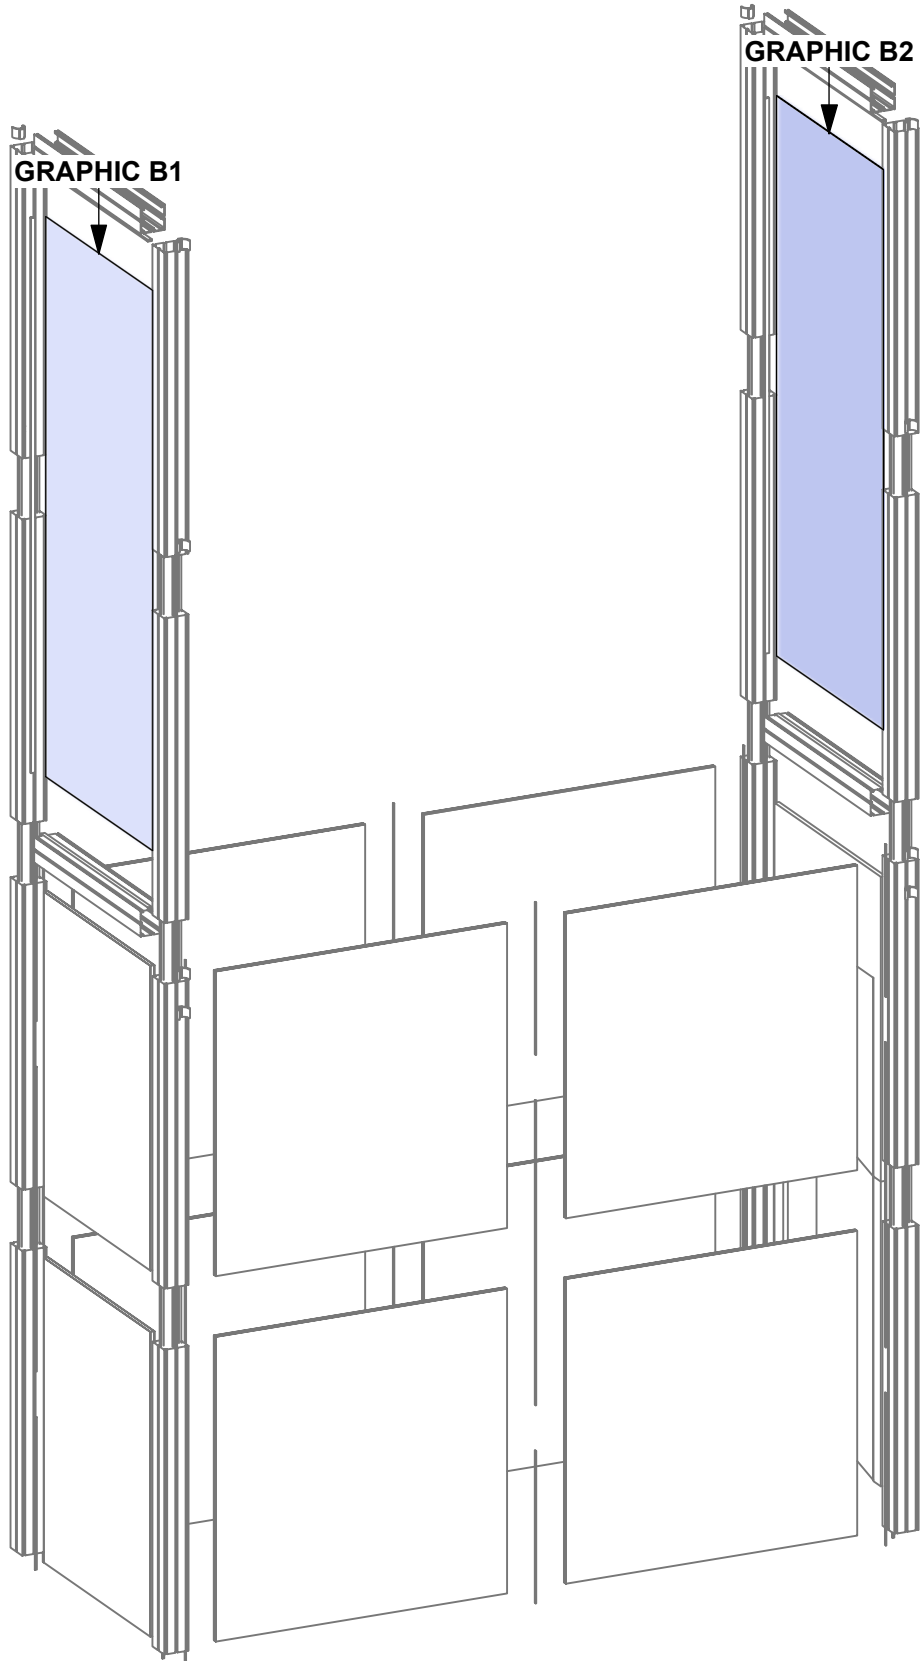

Install graphic by pressing the FCE-2 into the channels of FC extrusion. To pull graphics out of the channels, use tabs on the front side

- Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.
  - Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.
- |                    |                                 |
|--------------------|---------------------------------|
| 2400mm = (94 1/2") | Phone Line / Fax                |
| 2100mm = (82 5/8") | Internet connection             |
| 1800mm = (70 7/8") | Outlet                          |
| 1500mm = (59")     | Main Drop (point of distrution) |
| 1200mm = (47 1/4") |                                 |
| 900mm = (35 1/2")  |                                 |
| 600mm = (23 5/8")  |                                 |
| 300mm = (11 7/8")  |                                 |
- Wire running under carpet

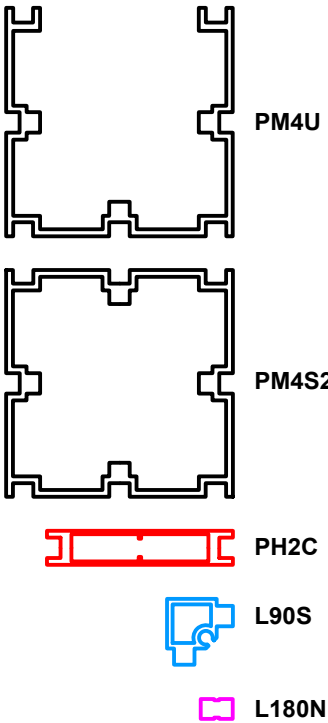

HYBRID PRO RENTAL KIT

Title: SET-UP INSTRUCTIONS

	Code	#	Description
	CFS	1	(A) 8' L X 4' H CURVE BANNER W/ GRAPHIC I
	CFS	1	(A2) 8' L X 4' H CURVE BANNER W/ GRAPHIC H

**SET UP INSTRUCTIONS:**

1. CONNECT BOTTOM AND TOP RAILS FOLLOWING THE LABELS
2. CONNECT SIDE RAILS
3. CLEAN THE FRAME AND PLACE THEM ON CLEAN PLACE
4. CAREFULLY REMOVE FABRIC COVER FROM BAGS
5. PLACE COVER AROUND THE BOTTOM OF THE FRAME
6. PULL COVER CAREFULLY UP TO THE TOP
7. CLOSE ALL ZIPPERS
8. ADJUST FABRIC AROUND THE FRAME

**BREAK DOWN INSTRUCTIONS:**


REVERSE SET-UP STEPS TO BREAKDOWN FRAME

**FABRIC CARE INSTRUCTIONS:**

1. UNZIP COVER ZIPPERS
2. CAREFULLY REMOVE FABRIC COVER
3. CLOSE ALL ZIPPERS
4. FOLD OR ROLL NEATLY
5. PLACE FABRIC IN COVER BAG


**PART LIST:**

- PER UNIT
- 7 30MM DIA. TUBE SECTIONS
  - 4 TC-30 CLAMPS
  - 1 FABRIC COVER

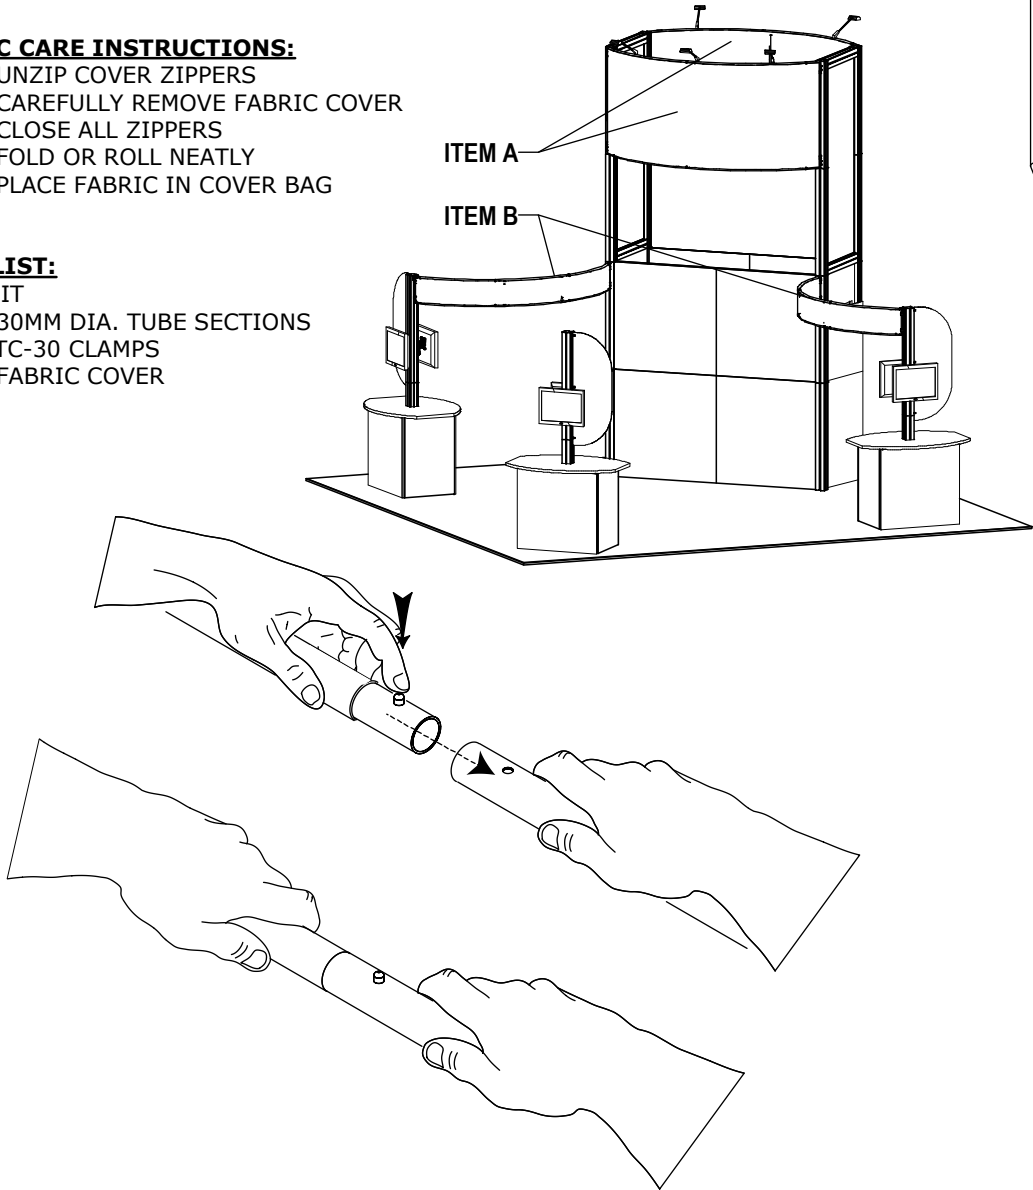

**Frame 'A' Assembly**


Assemble frame as shown

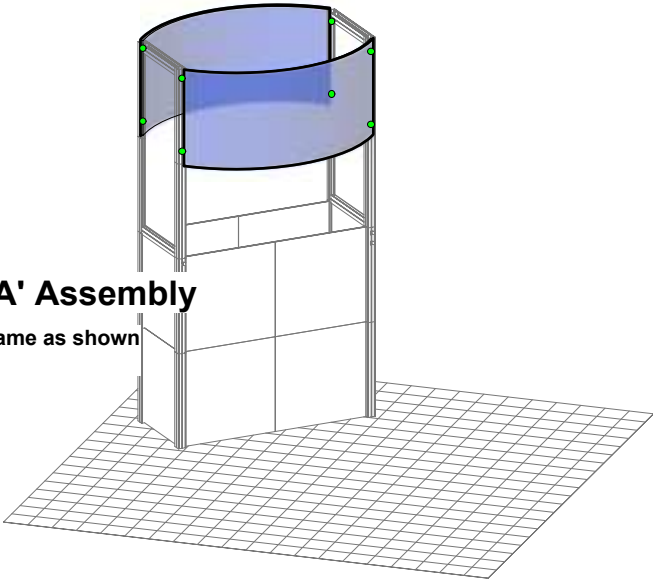

1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.
2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")	Phone Line / Fax
2100mm = (82 5/8")	Internet connection
1800mm = (70 7/8")	Outlet
1500mm = (59")	Main Drop (point of distrution)
1200mm = (47 1/4")	
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	



Wire running under carpet

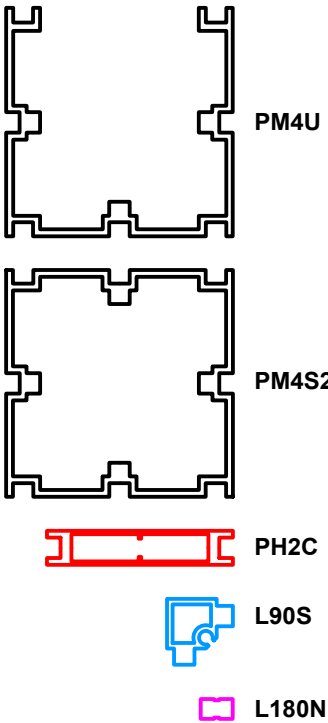



**HYBRID PRO RENTAL KIT**

Title: SET-UP INSTRUCTIONS

Code	#	Description
CFS	1	(A) 8' L X 4' H CURVE BANNER W/ GRAPHIC I
CFS	1	(A2) 8' L X 4' H CURVE BANNER W/ GRAPHIC H

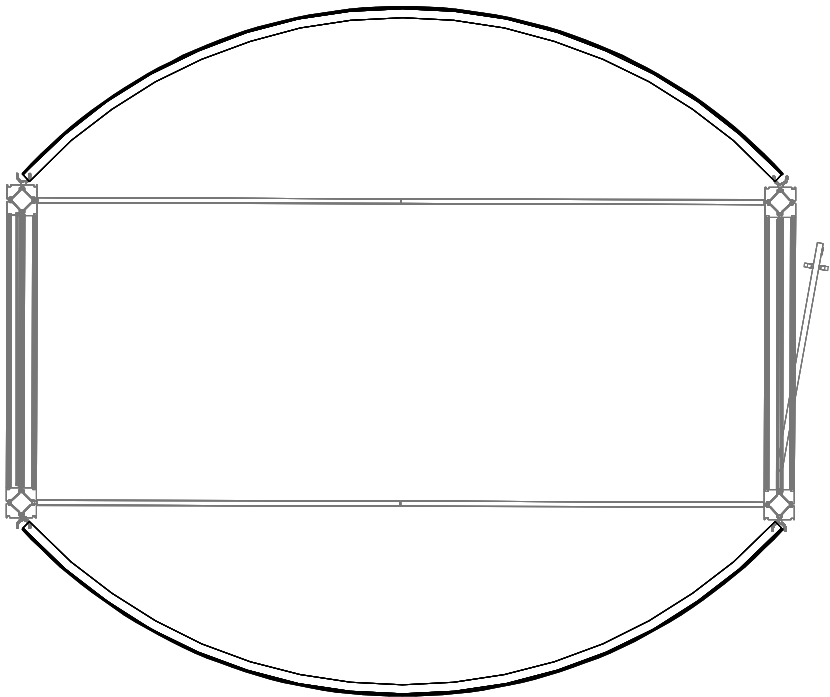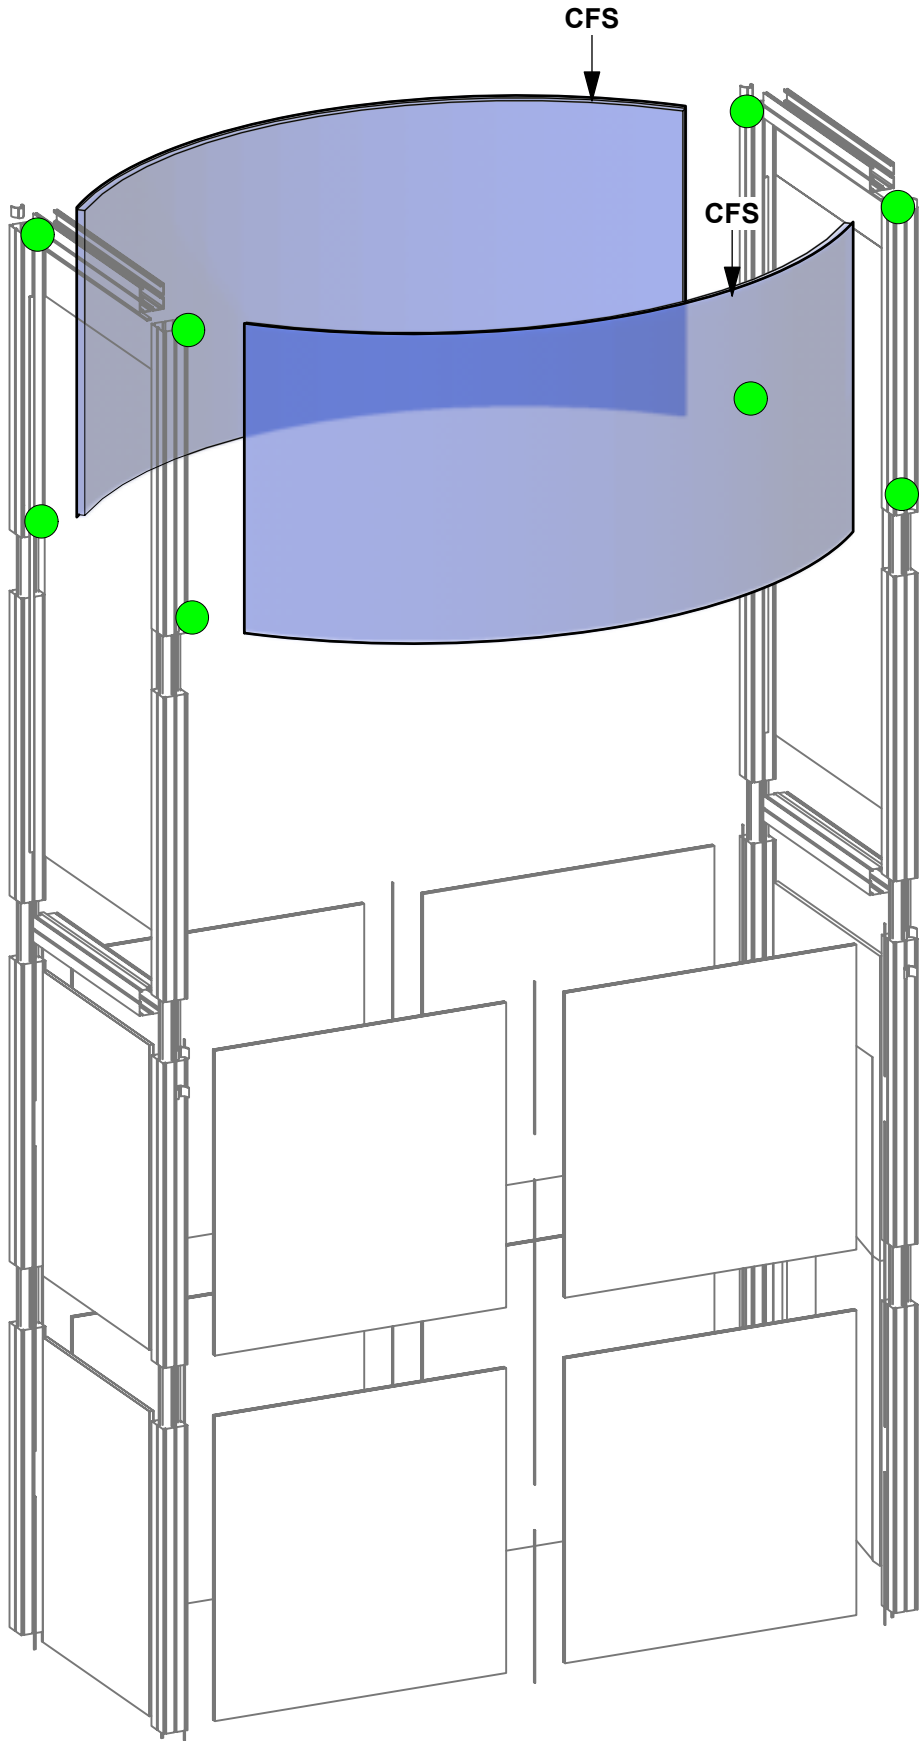

PLEASE SEE THE NEXT PAGE FOR  
DETAILED SETUP INSTRUCTIONS

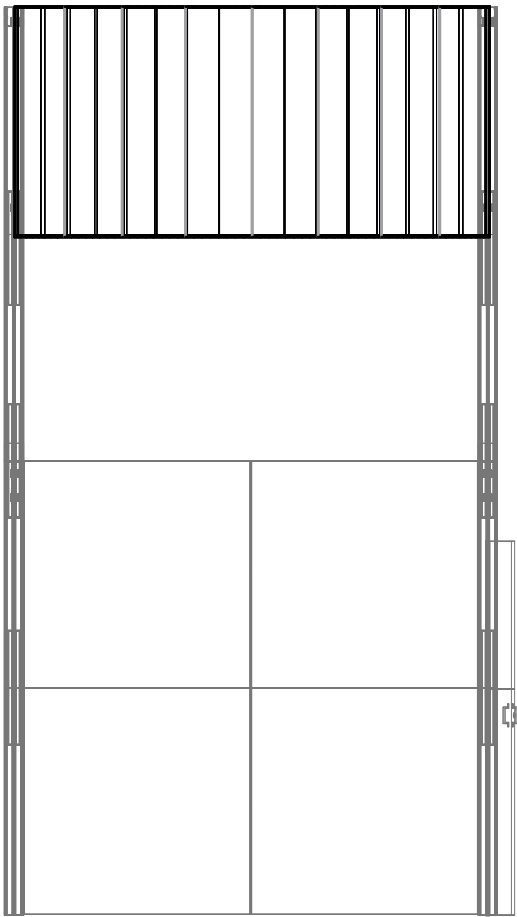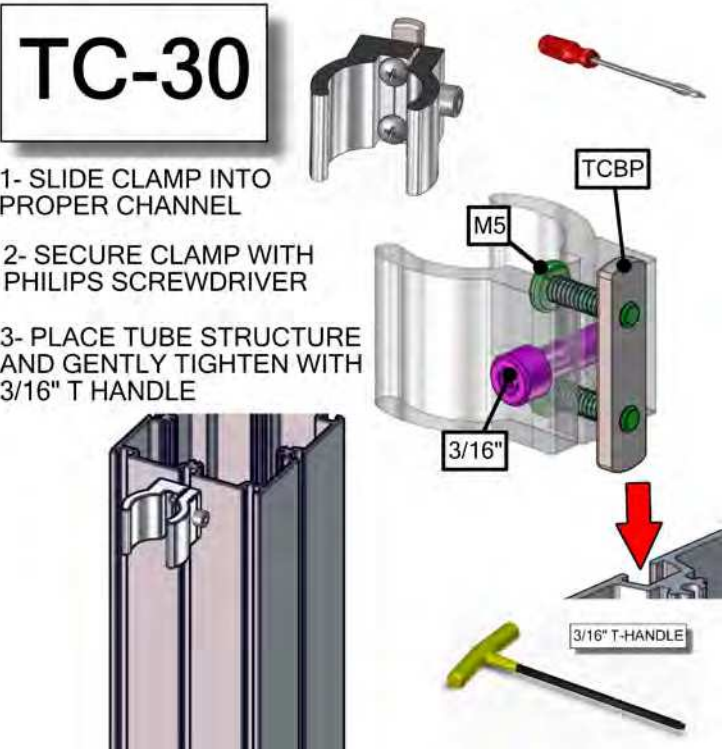


1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")	Phone Line / Fax
2100mm = (82 5/8")	Internet connection
1800mm = (70 7/8")	Outlet
1500mm = (59")	Main Drop (point of distrution)
1200mm = (47 1/4")	
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	

Wire running under carpet


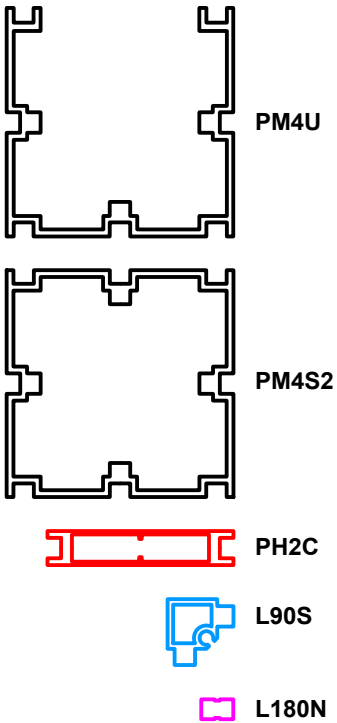


HYBRID PRO RENTAL KIT


Title: SET-UP INSTRUCTIONS



Code	#	Description
LEDL10S	6	LED SPOTLIGHT,3M,UL PLUG W/TRANSFORMER SILVER

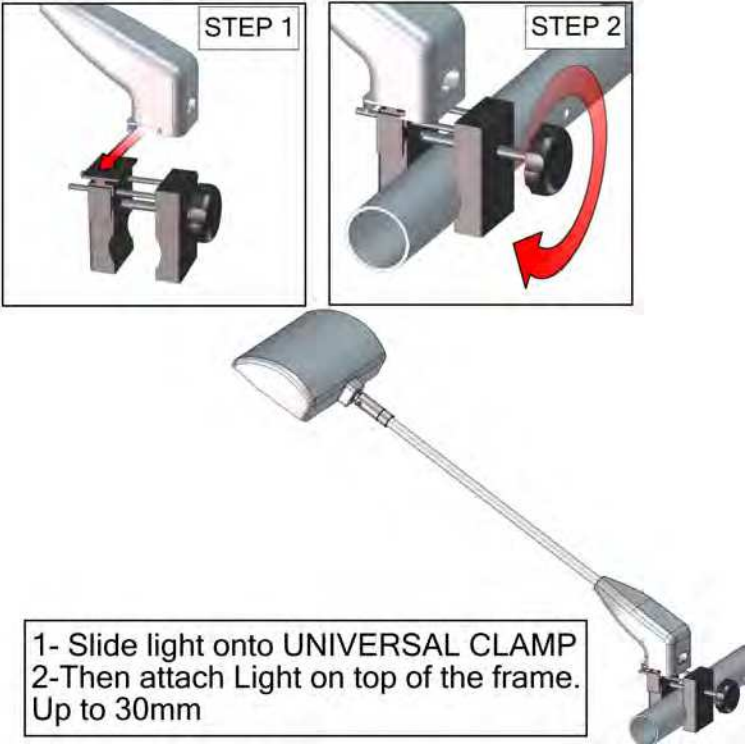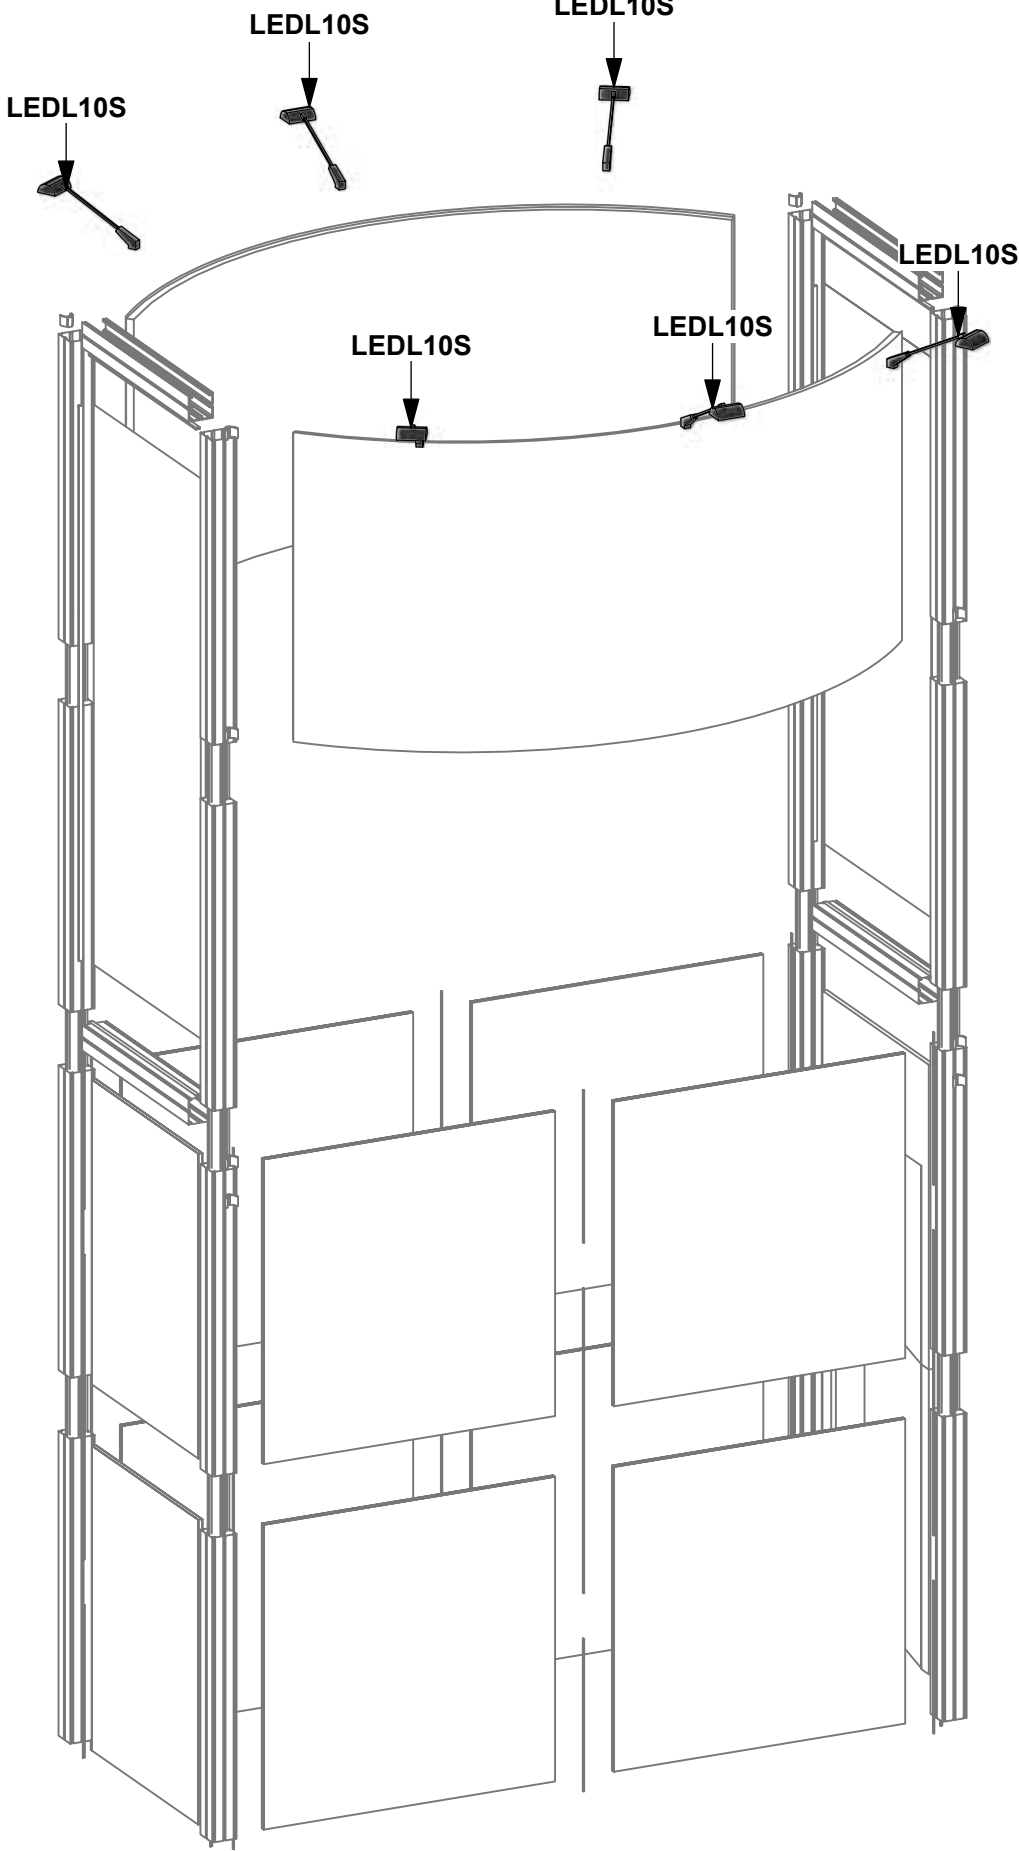

1- Slide light onto UNIVERSAL CLAMP  
2-Then attach Light on top of the frame.  
Up to 30mm

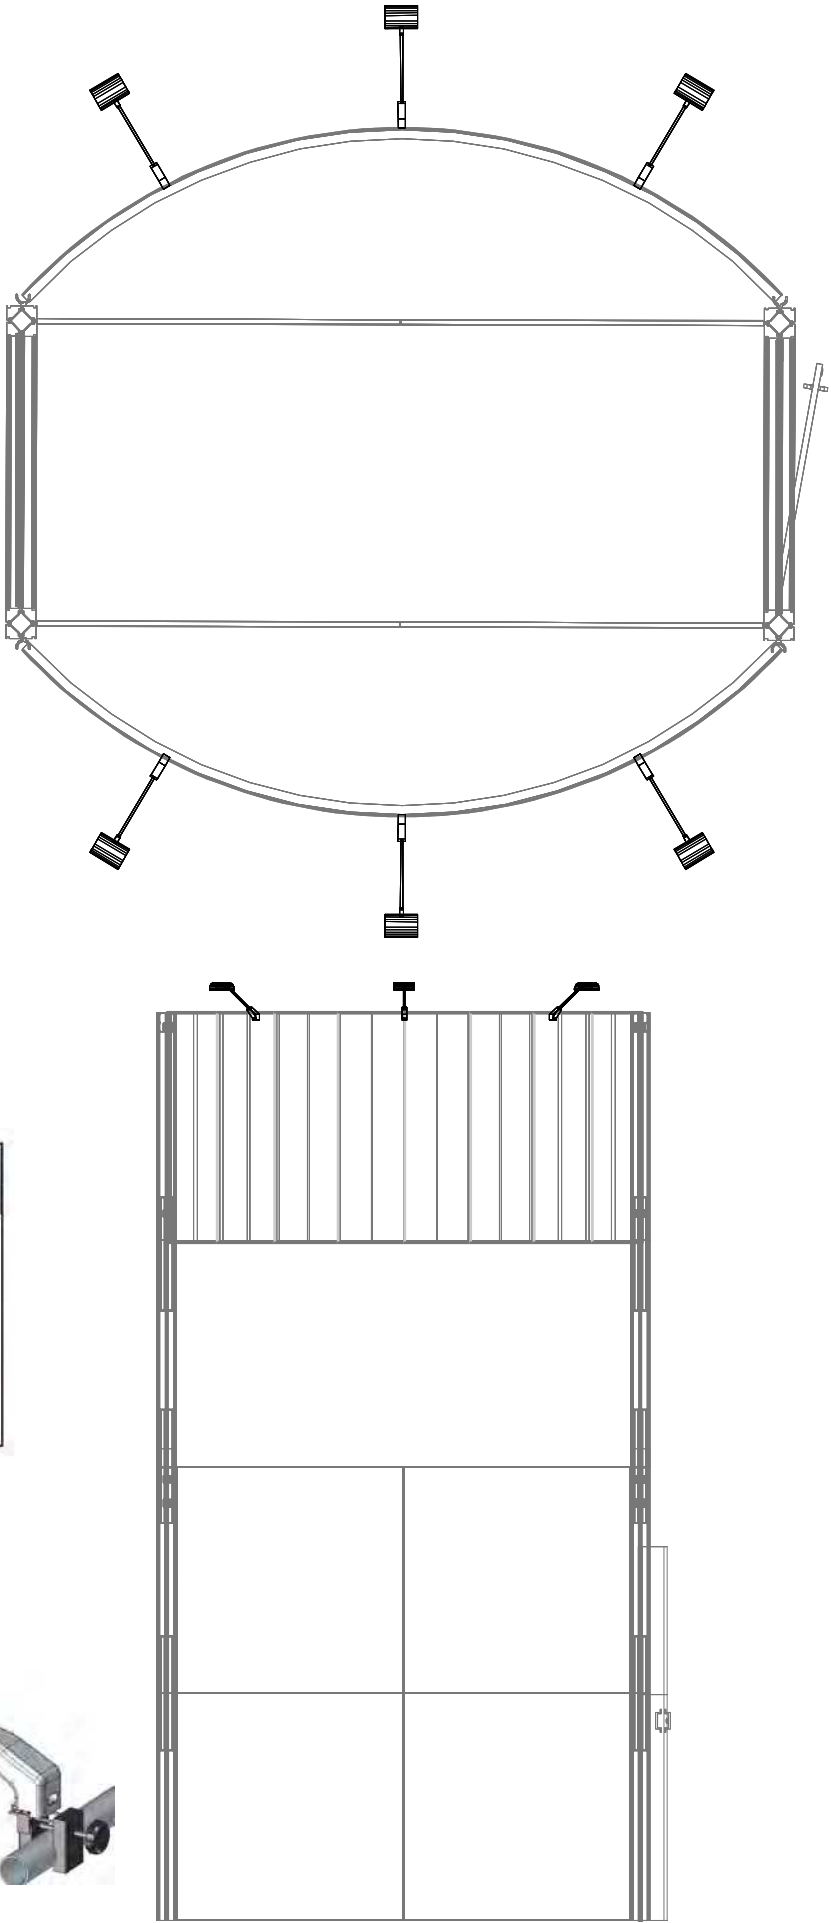


1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")	Phone Line / Fax
2100mm = (82 5/8")	Internet connection
1800mm = (70 7/8")	Outlet
1500mm = (59")	Main Drop (point of distrution)
1200mm = (47 1/4")	
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	


--- Wire running under carpet

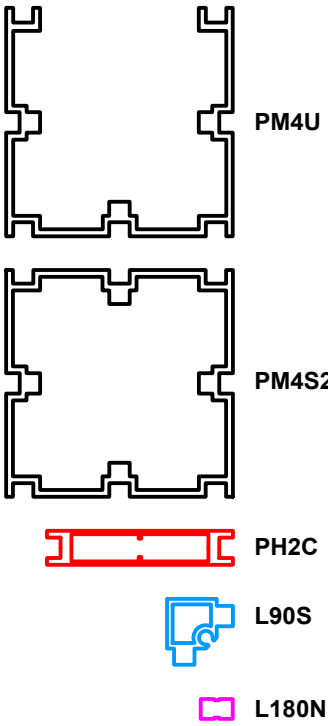

HYBRID PRO RENTAL KIT

Title: SET-UP INSTRUCTIONS

	Code	#	Description
	R57	2	900MM V x 900MM W LAMINATE PANEL
	R74	4	900MM V x 600MM W LAMINATE PANEL
	L90S-900	8	900MM 90 DEGREE SILVER LINK EXTRUSION
	R56	2	900MM W x 900MM V LAMINATE CABINET DOOR PANEL

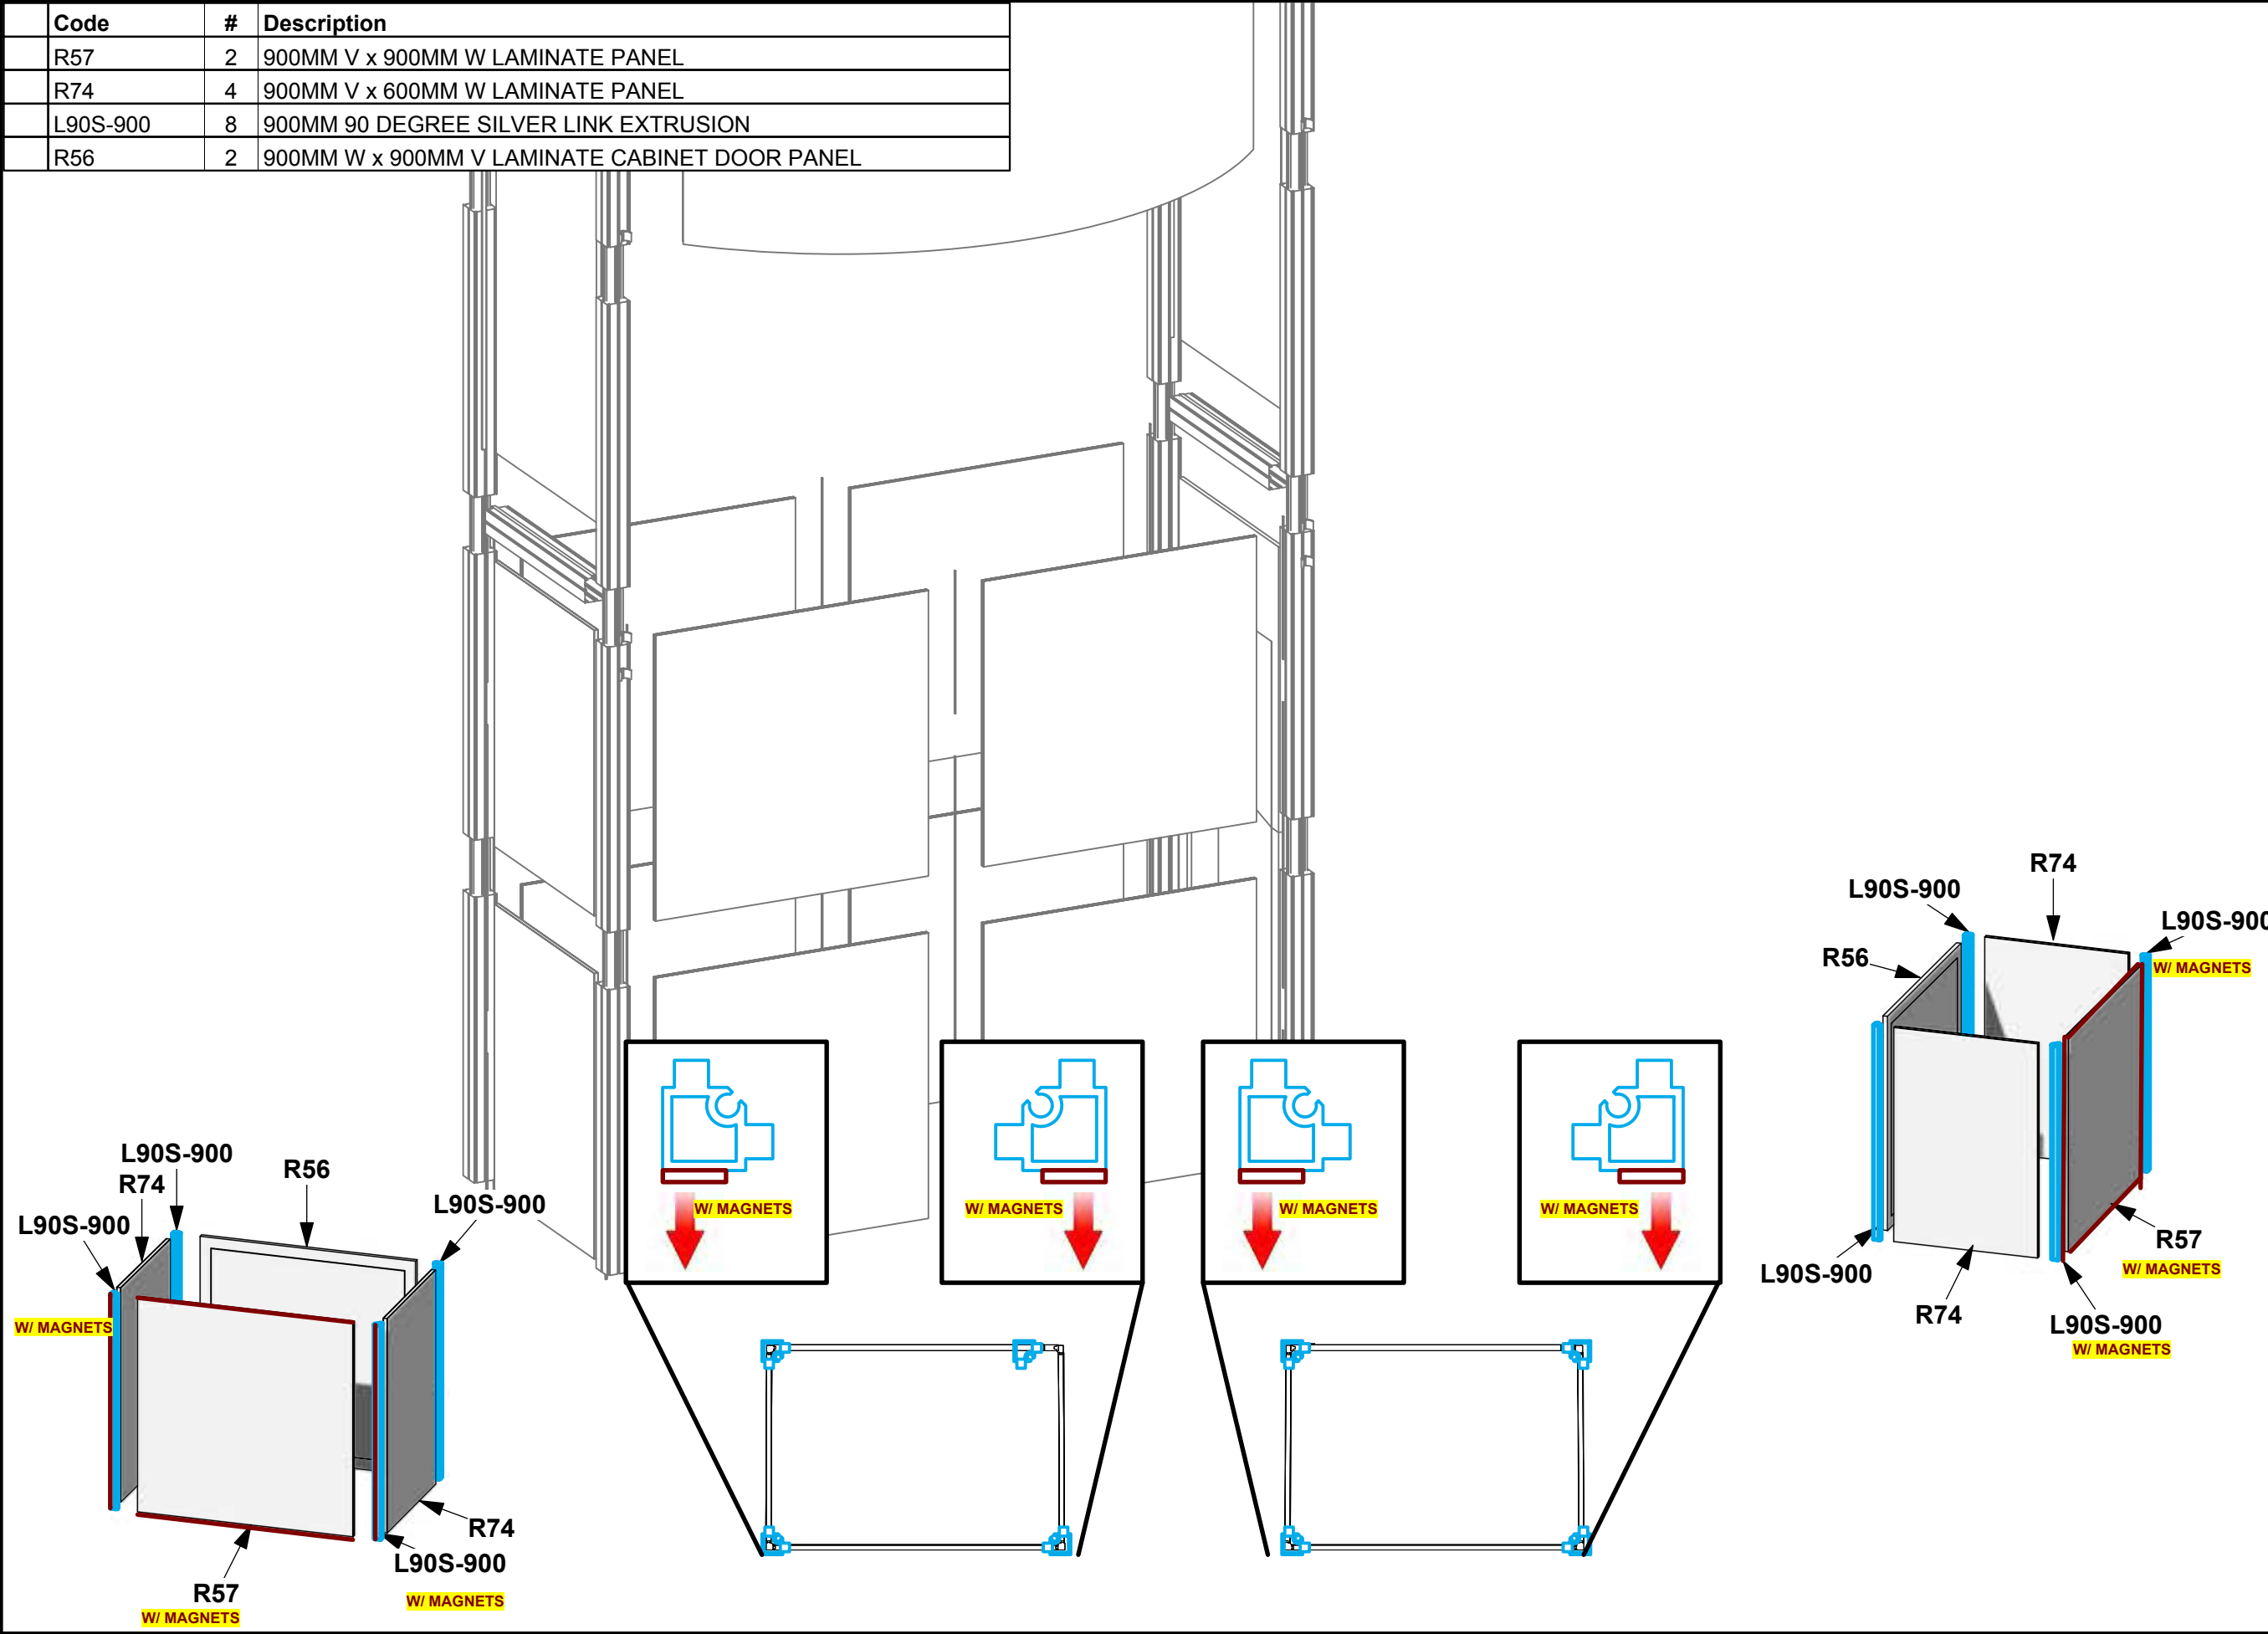


1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")	Phone Line / Fax
2100mm = (82 5/8")	Internet connection
1800mm = (70 7/8")	Outlet
1500mm = (59")	Main Drop (point of distrution)
1200mm = (47 1/4")	
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	








Wire running under carpet

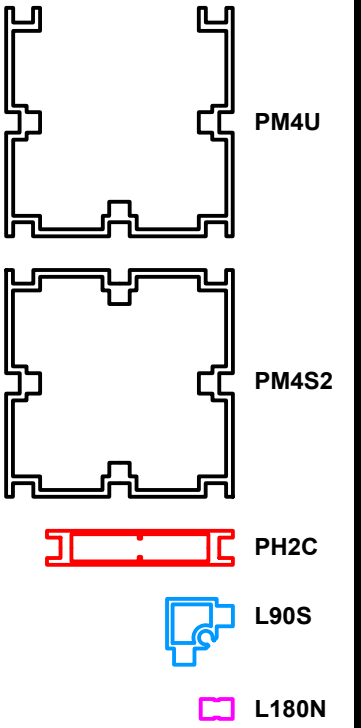

HYBRID PRO RENTAL KIT

Title: SET-UP INSTRUCTIONS

Code	#	Description
CT-54L	2	5' X 4' LAMINATE COUNTER TOP
R15	2	1200MM PM4S2 SILVER EXTRUSION WITH PH2 STOP AT 302MM
PM4BP1	2	15 3/4" X 9 7/8" ALUMINUM BASE PLATE
INTERNAL SH	2	BLACK INTERNAL SHELF
SS1	8	SHELF SUPPORT PIN (SILVER)

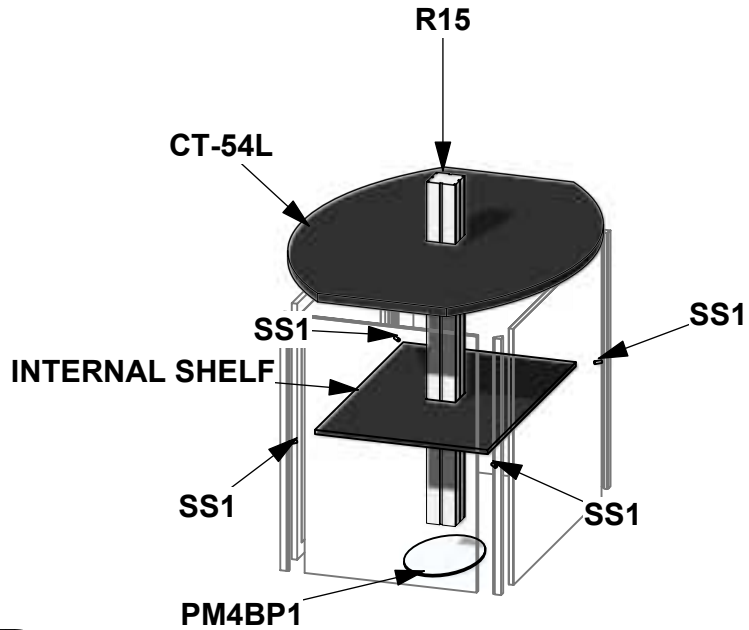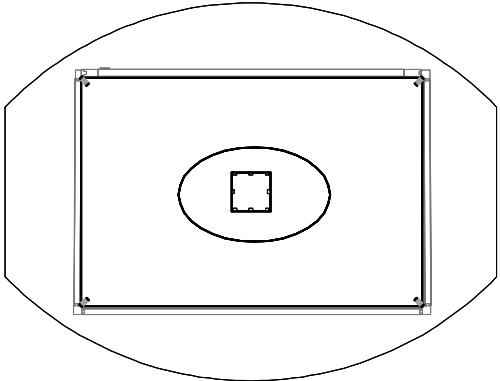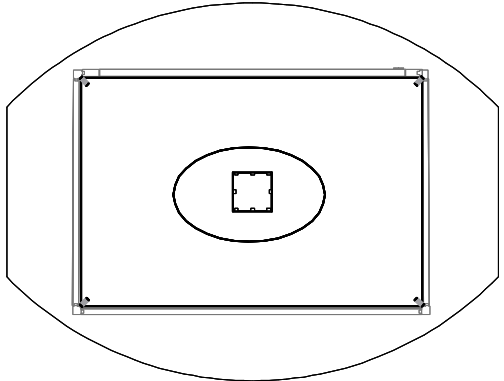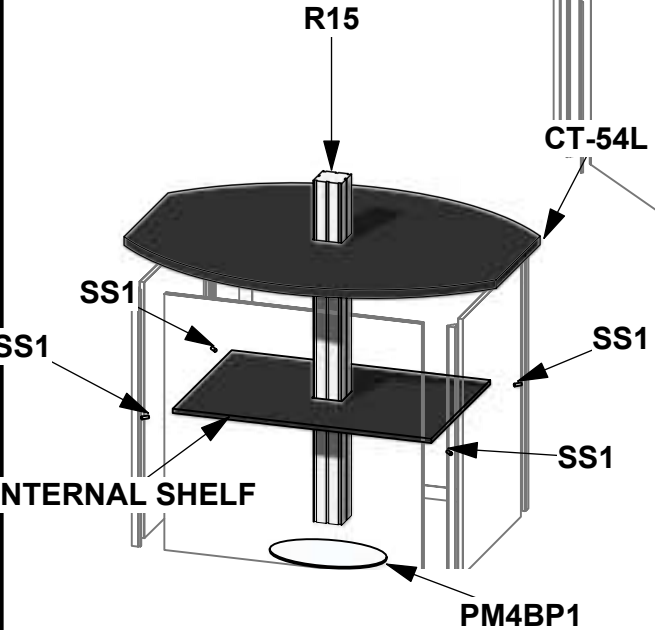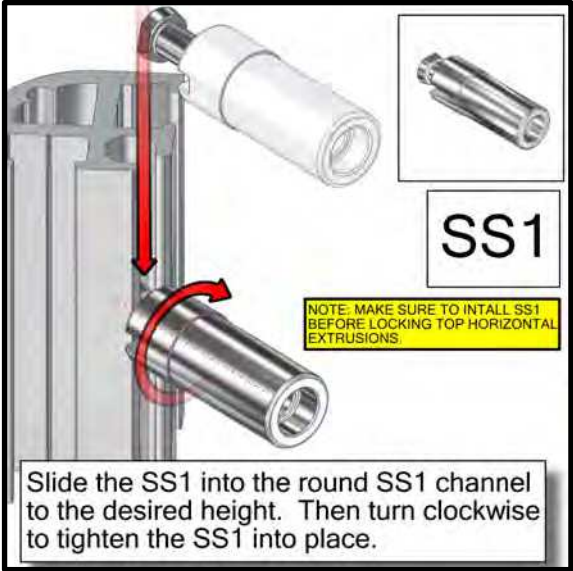
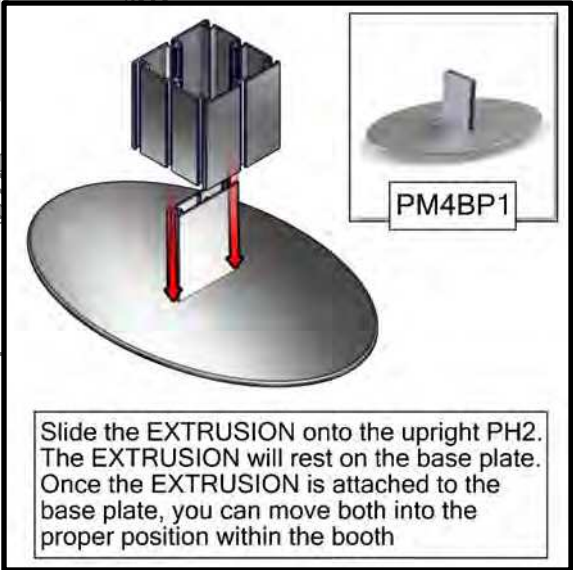
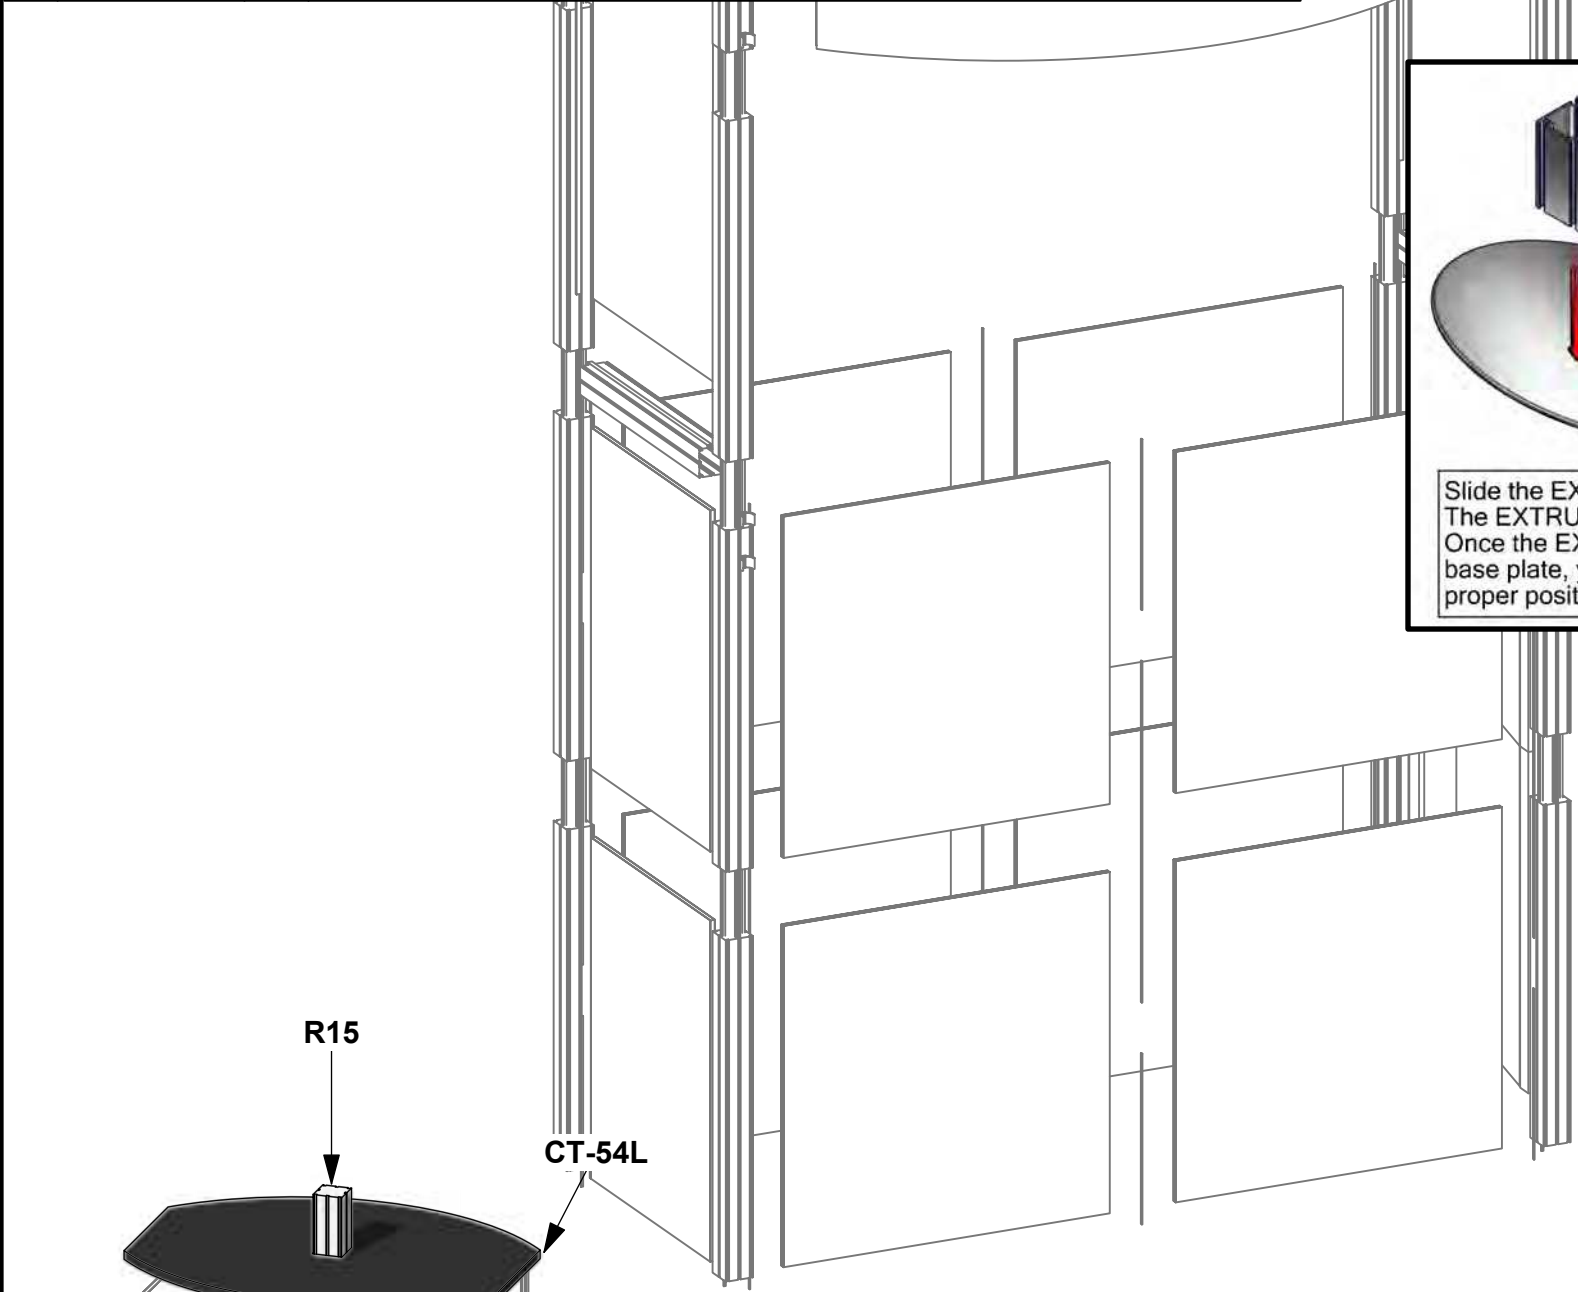


1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")	Phone Line / Fax
2100mm = (82 5/8")	Internet connection
1800mm = (70 7/8")	Outlet
1500mm = (59")	Main Drop (point of distrution)
1200mm = (47 1/4")	
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	




Wire running under carpet



HYBRID PRO RENTAL KIT

Title: SET-UP INSTRUCTIONS

Code	#	Description
R15	2	1200MM PM4S2 SILVER EXTRUSION WITH PH2 STOP AT 302MM
R13	2	600MM PH2 CONNECTOR WITH TENSION GLIDES
TC-30MM	4	SILVER ANODIZE FINISH 30MM TUBE CLAMP

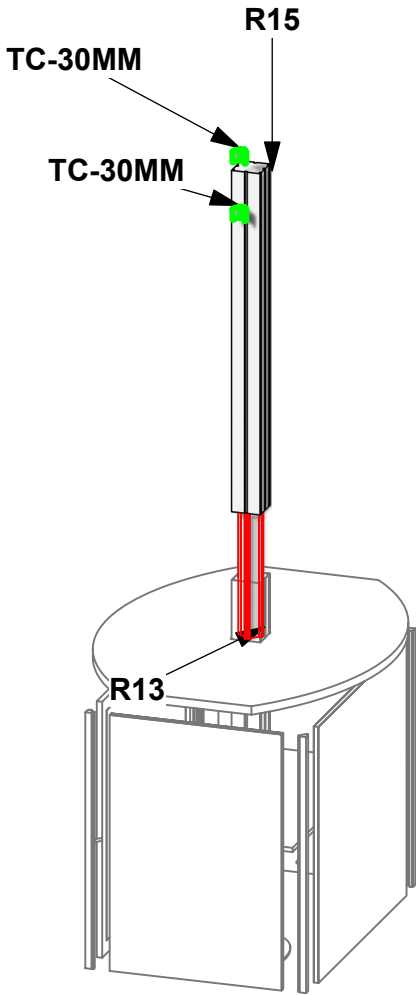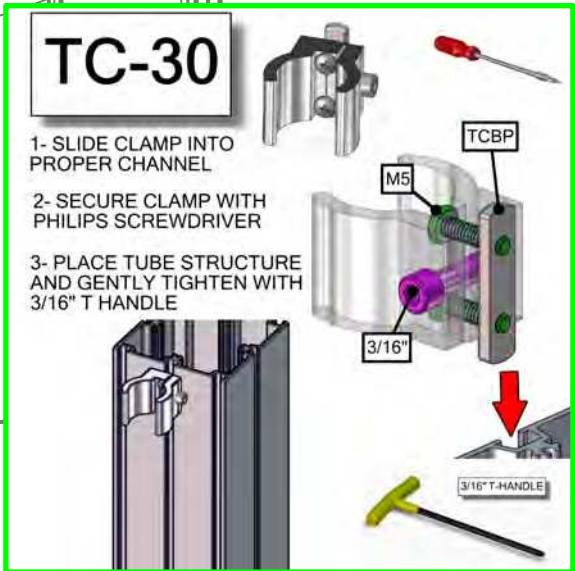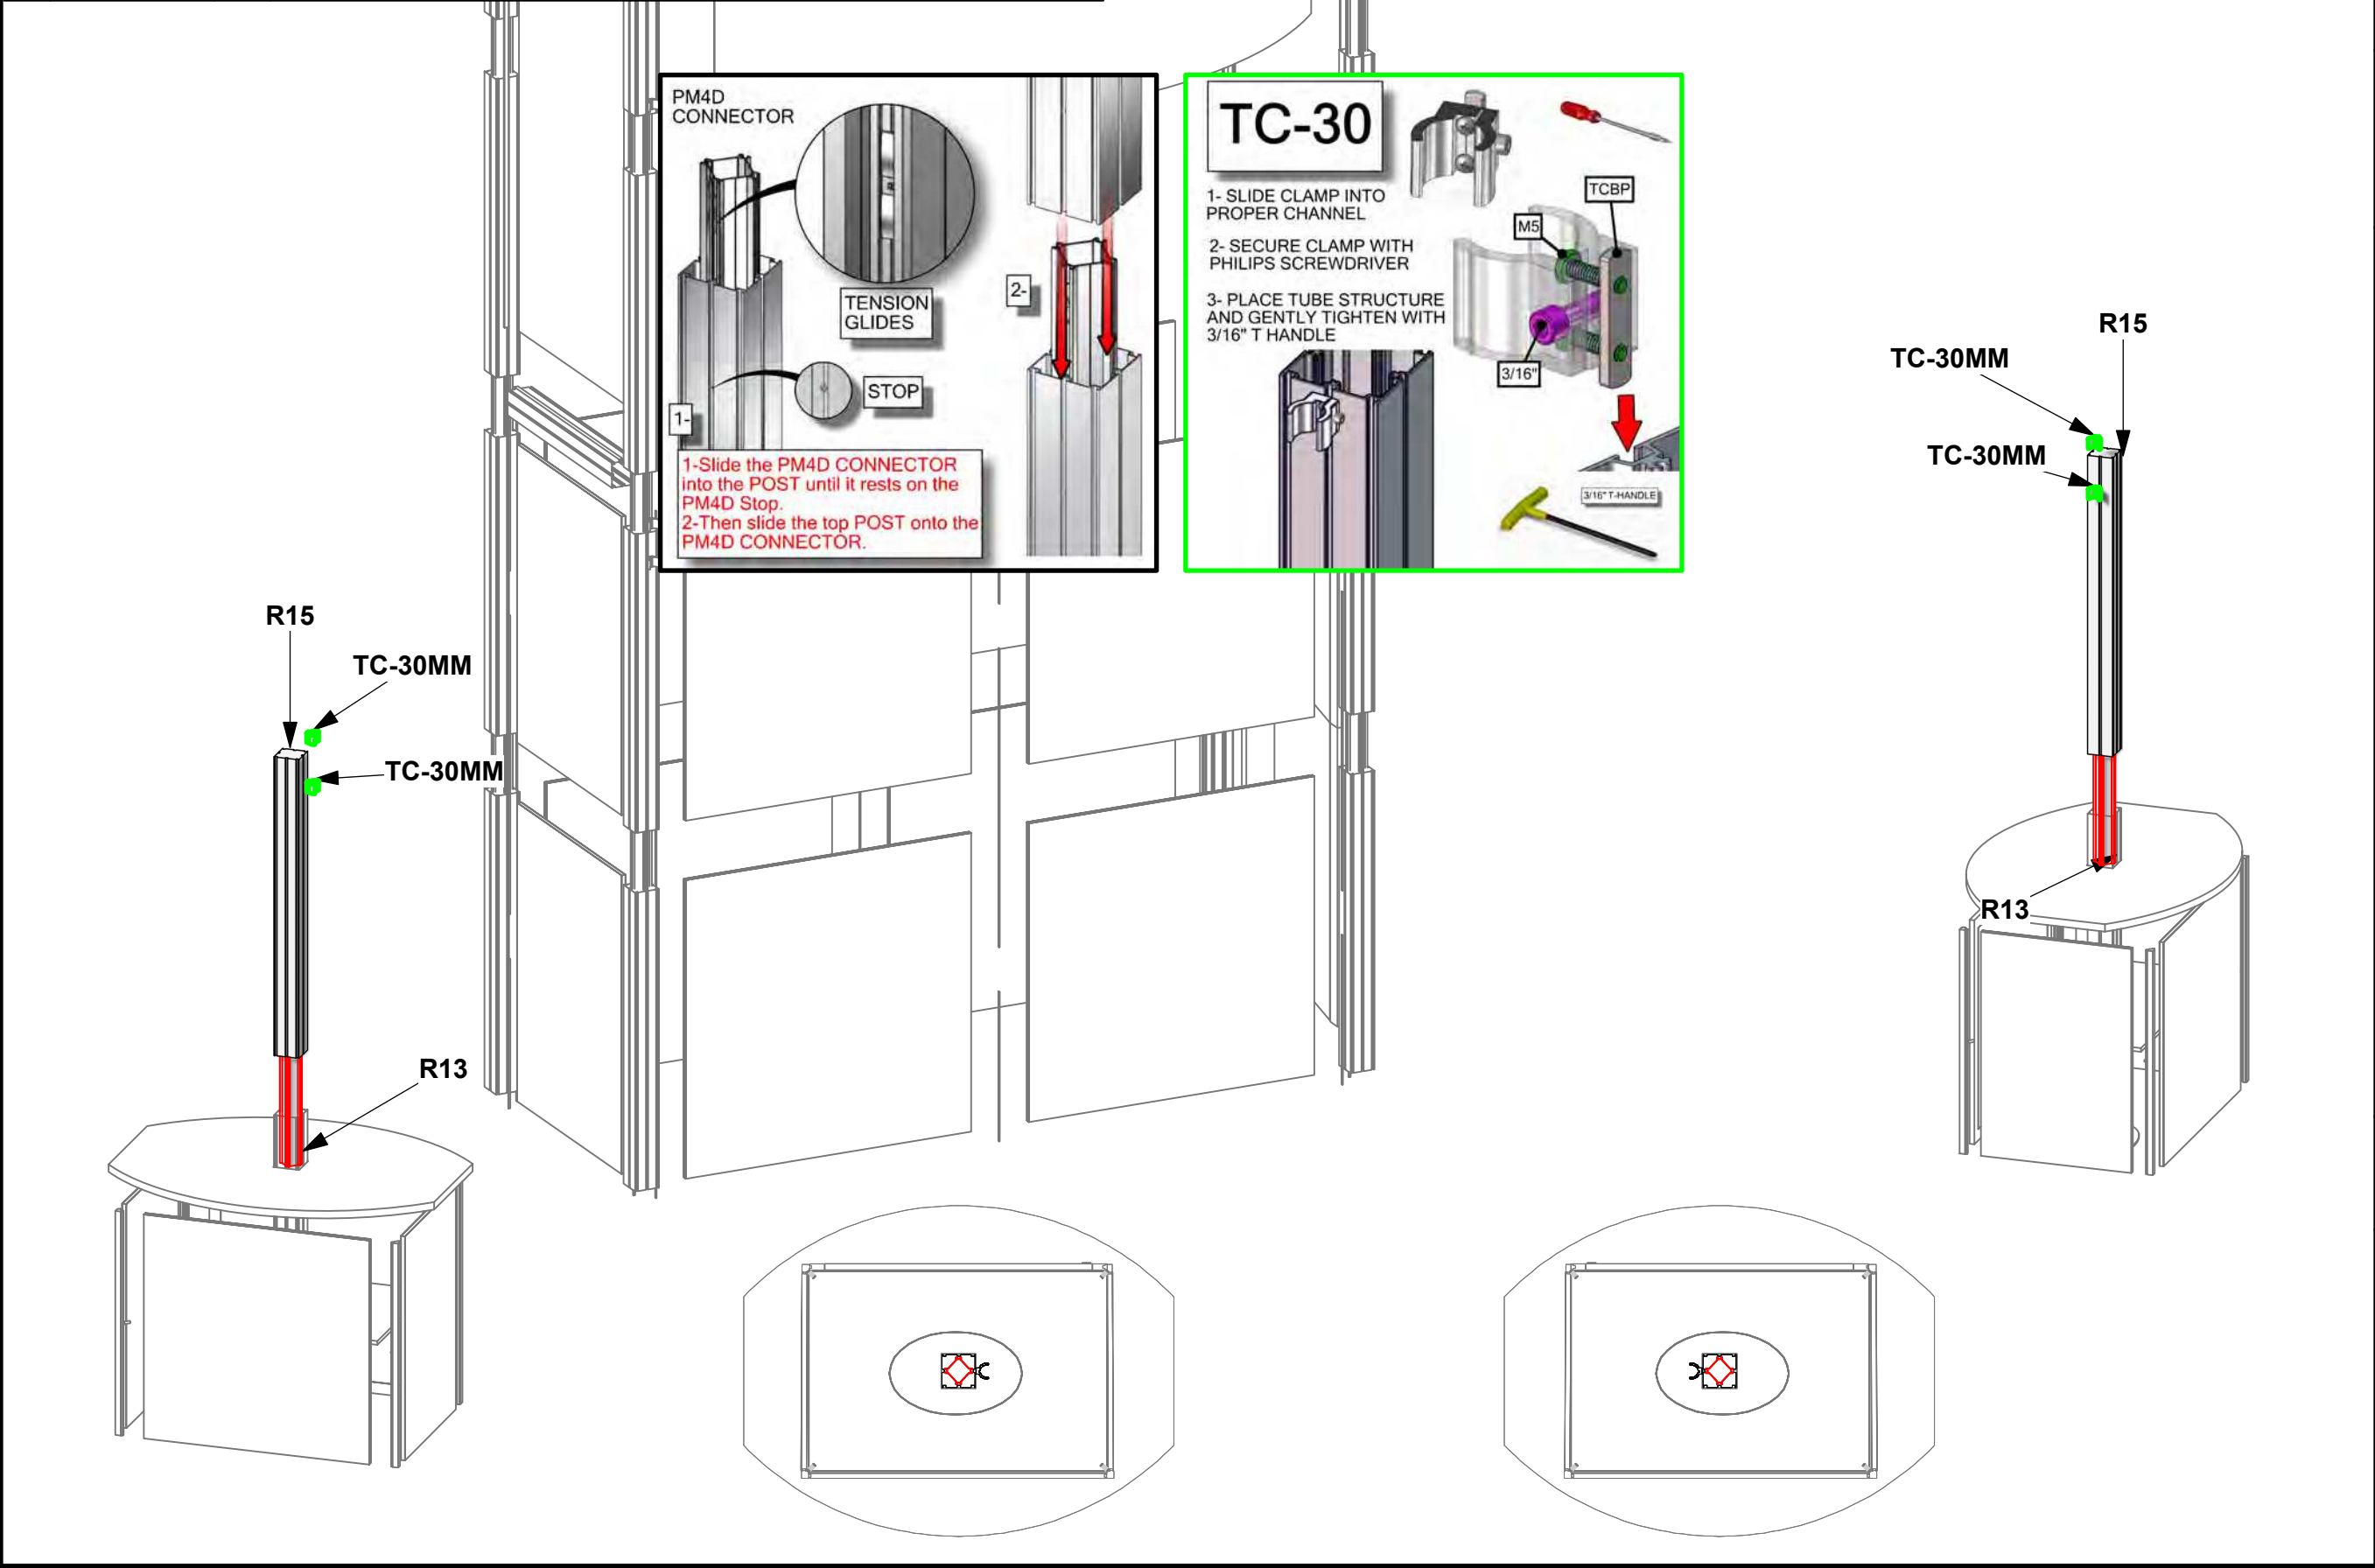


1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")	Phone Line / Fax
2100mm = (82 5/8")	Internet connection
1800mm = (70 7/8")	Outlet
1500mm = (59")	Main Drop (point of distrution)
1200mm = (47 1/4")	
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	

Wire running under carpet

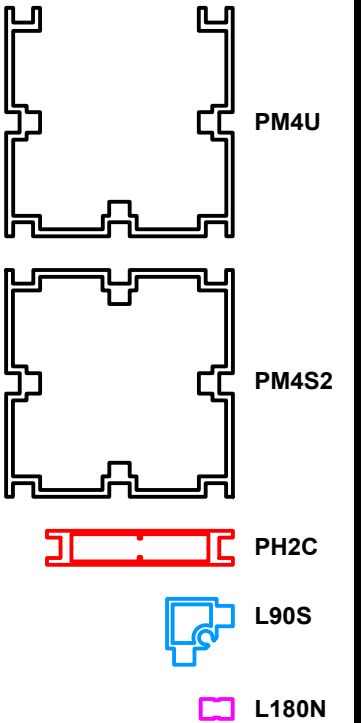

HYBRID PRO RENTAL KIT

Title: SET-UP INSTRUCTIONS



Code	#	Description
GRAPHIC D3	1	49.75" X 18" DSG DOUBLE SIDED GRAPHIC ON 6MM SINTRA
CKAPS	6	CABLE KIT 7MM PANEL SUPPORT (MULTI ANGLE)
GRAPHIC D1	1	49.75" X 18" DSG DOUBLE SIDED GRAPHIC ON 6MM SINTRA
GRAPHIC E1	1	35 3/16" (H) X 37 1/4" (W) ROLLABLE DETACHABLE DSG GRAPHIC WITH
GRAPHIC E3	1	35 3/16" (H) X 37 1/4" (W) ROLLABLE DETACHABLE DSG GRAPHIC WITH
SM-BRACKET	4	SMALL MONITOR BRACKET

1-

2-

NT1

CKAP

CKAPS hex bolt

Screw the CKAP, clockwise, into the channel until it is tight. Loosen the head screw and make sure the slit in the head is running the correct direction, then tighten back into place. Loosen the hex bolt and insert the SINTRA and tighten into place.

SM-MB

1- INSERT BOLTS INTO MIDDLE CHANNEL. THEN SECURE MONITOR MOUNT WITH WING NUTS.

2- ATTACH MONITOR TO BRACKETS SEE SANUS MANUAL FOR MORE INFO



GRAPHIC D1

SM-BRACKET

SM-BRACKET

GRAPHIC E1

W/ MAGNETIC TAPE

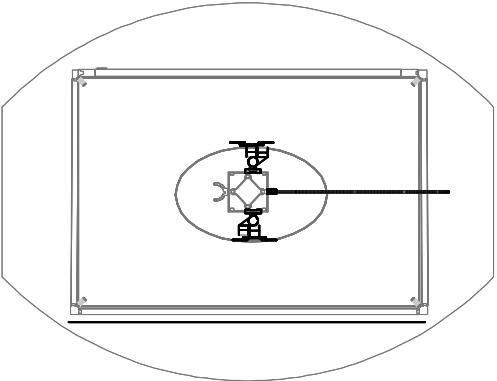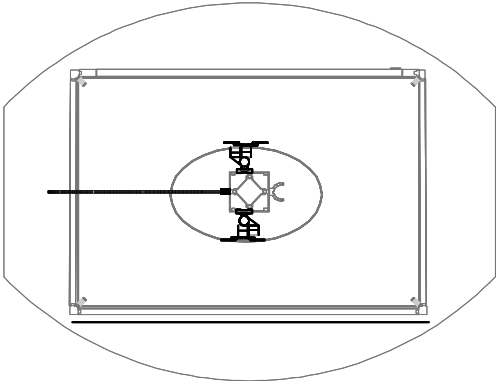

GRAPHIC D3

SM-BRACKET

SM-BRACKET

GRAPHIC E3

W/ MAGNETIC TAPE

1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")	Phone Line / Fax
2100mm = (82 5/8")	Internet connection
1800mm = (70 7/8")	Outlet
1500mm = (59")	Main Drop (point of distrution)
1200mm = (47 1/4")	
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	

Wire running under carpet

PM4U

PM4S2

PH2C

L90S

L180N

HYBRID PRO RENTAL KIT

Title: SET-UP INSTRUCTIONS

	Code	#	Description
	NF-RK-09-1	1	(C2) 108" X 12" & CONVEX 106" X 12" CONCAVE C SHPD FAB STRUCT GRFX - PRINT B.S.
	NF-RK-09-1	1	(C1) 108" X 12" CONVEX & 106" X 12" CONCAVE C SHPD FAB STRUCT GRFX - PRINT B.S. (RK-09 KIT)

SET UP INSTRUCTIONS:

- CONNECT BOTTOM AND TOP RAILS FOLLOWING THE LABELS
- CONNECT SIDE RAILS
- CLEAN THE FRAME AND PLACE THEM ON CLEAN PLACE
- CAREFULLY REMOVE FABRIC COVER FROM BAGS
- PLACE COVER AROUND THE BOTTOM OF THE FRAME
- PULL COVER CAREFULLY UP TO THE TOP
- CLOSE ALL ZIPPERS
- ADJUST FABRIC AROUND THE FRAME

BREAK DOWN INSTRUCTIONS:

REVERSE SET-UP STEPS TO BREAKDOWN FRAME





FABRIC CARE INSTRUCTIONS:

- UNZIP COVER ZIPPERS
- CAREFULLY REMOVE FABRIC COVER
- CLOSE ALL ZIPPERS
- FOLD OR ROLL NEATLY
- PLACE FABRIC IN COVER BAG

PART LIST:

PER UNIT

- |    |                         |
|----|-------------------------|
| 10 | 30MM DIA. TUBE SECTIONS |
| 4  | TC30 CLAMPS             |
| 1  | FABRIC COVER            |

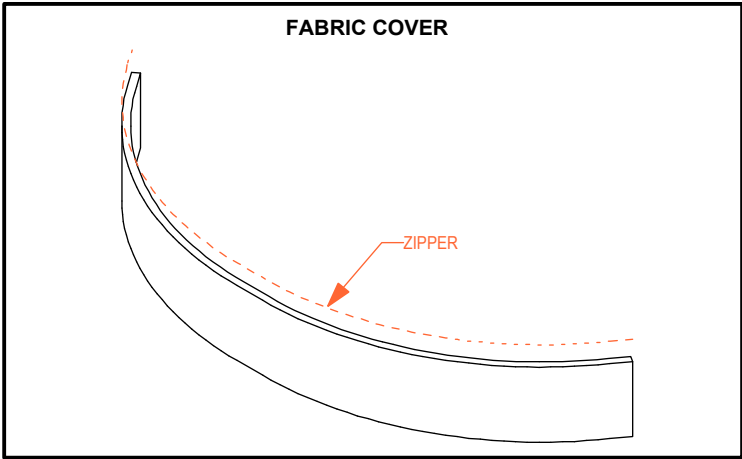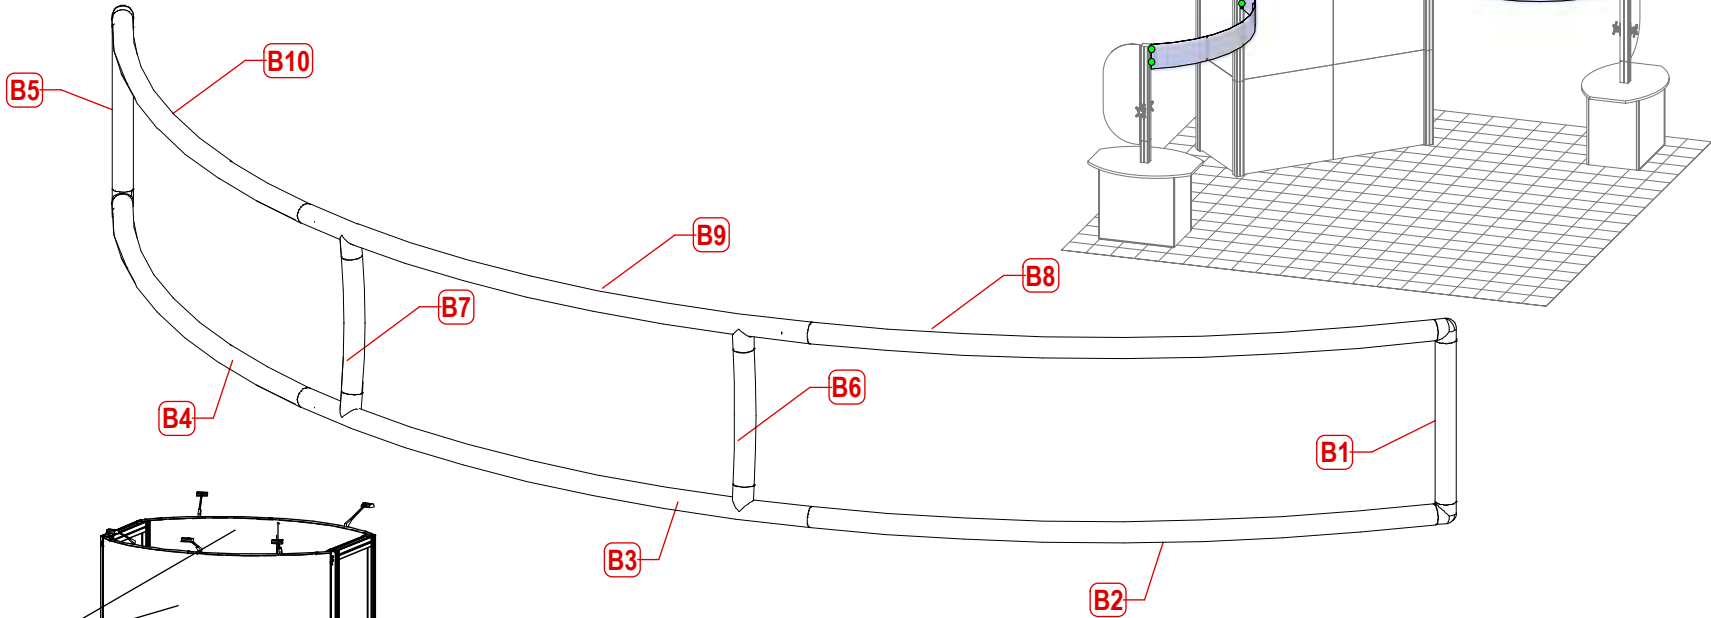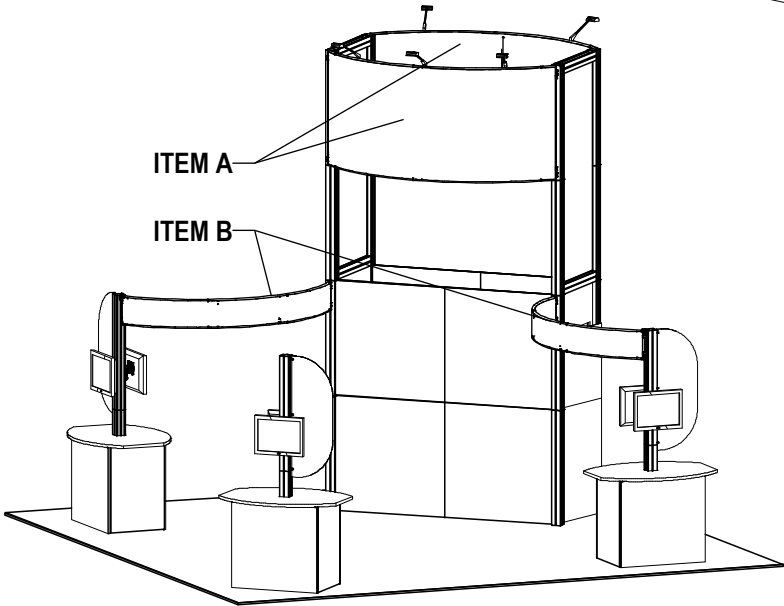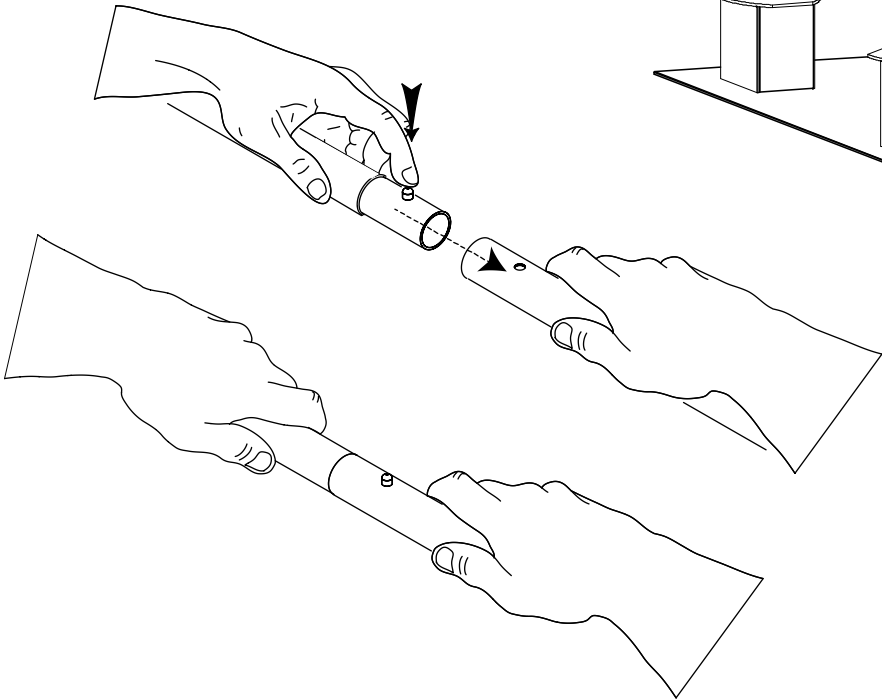


1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.


2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")	Phone Line / Fax
2100mm = (82 5/8")	Internet connection
1800mm = (70 7/8")	Outlet
1500mm = (59")	Main Drop (point of distrution)
1200mm = (47 1/4")	
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	

Wire running under carpet



PM4U



PM4S2



PH2C



L90S




L180N

HYBRID PRO RENTAL KIT



Title: SET-UP INSTRUCTIONS

Code	#	Description
NF-RK-09-1	1	(C2) 108" X 12" & CONVEX 106" X 12" CONCAVE C SHPD FAB STRUCT GRFX - PRINT B.S.
NF-RK-09-1	1	(C1) 108" X 12" CONVEX & 106" X 12" CONCAVE C SHPD FAB STRUCT GRFX - PRINT B.S. (RK-09 KIT)

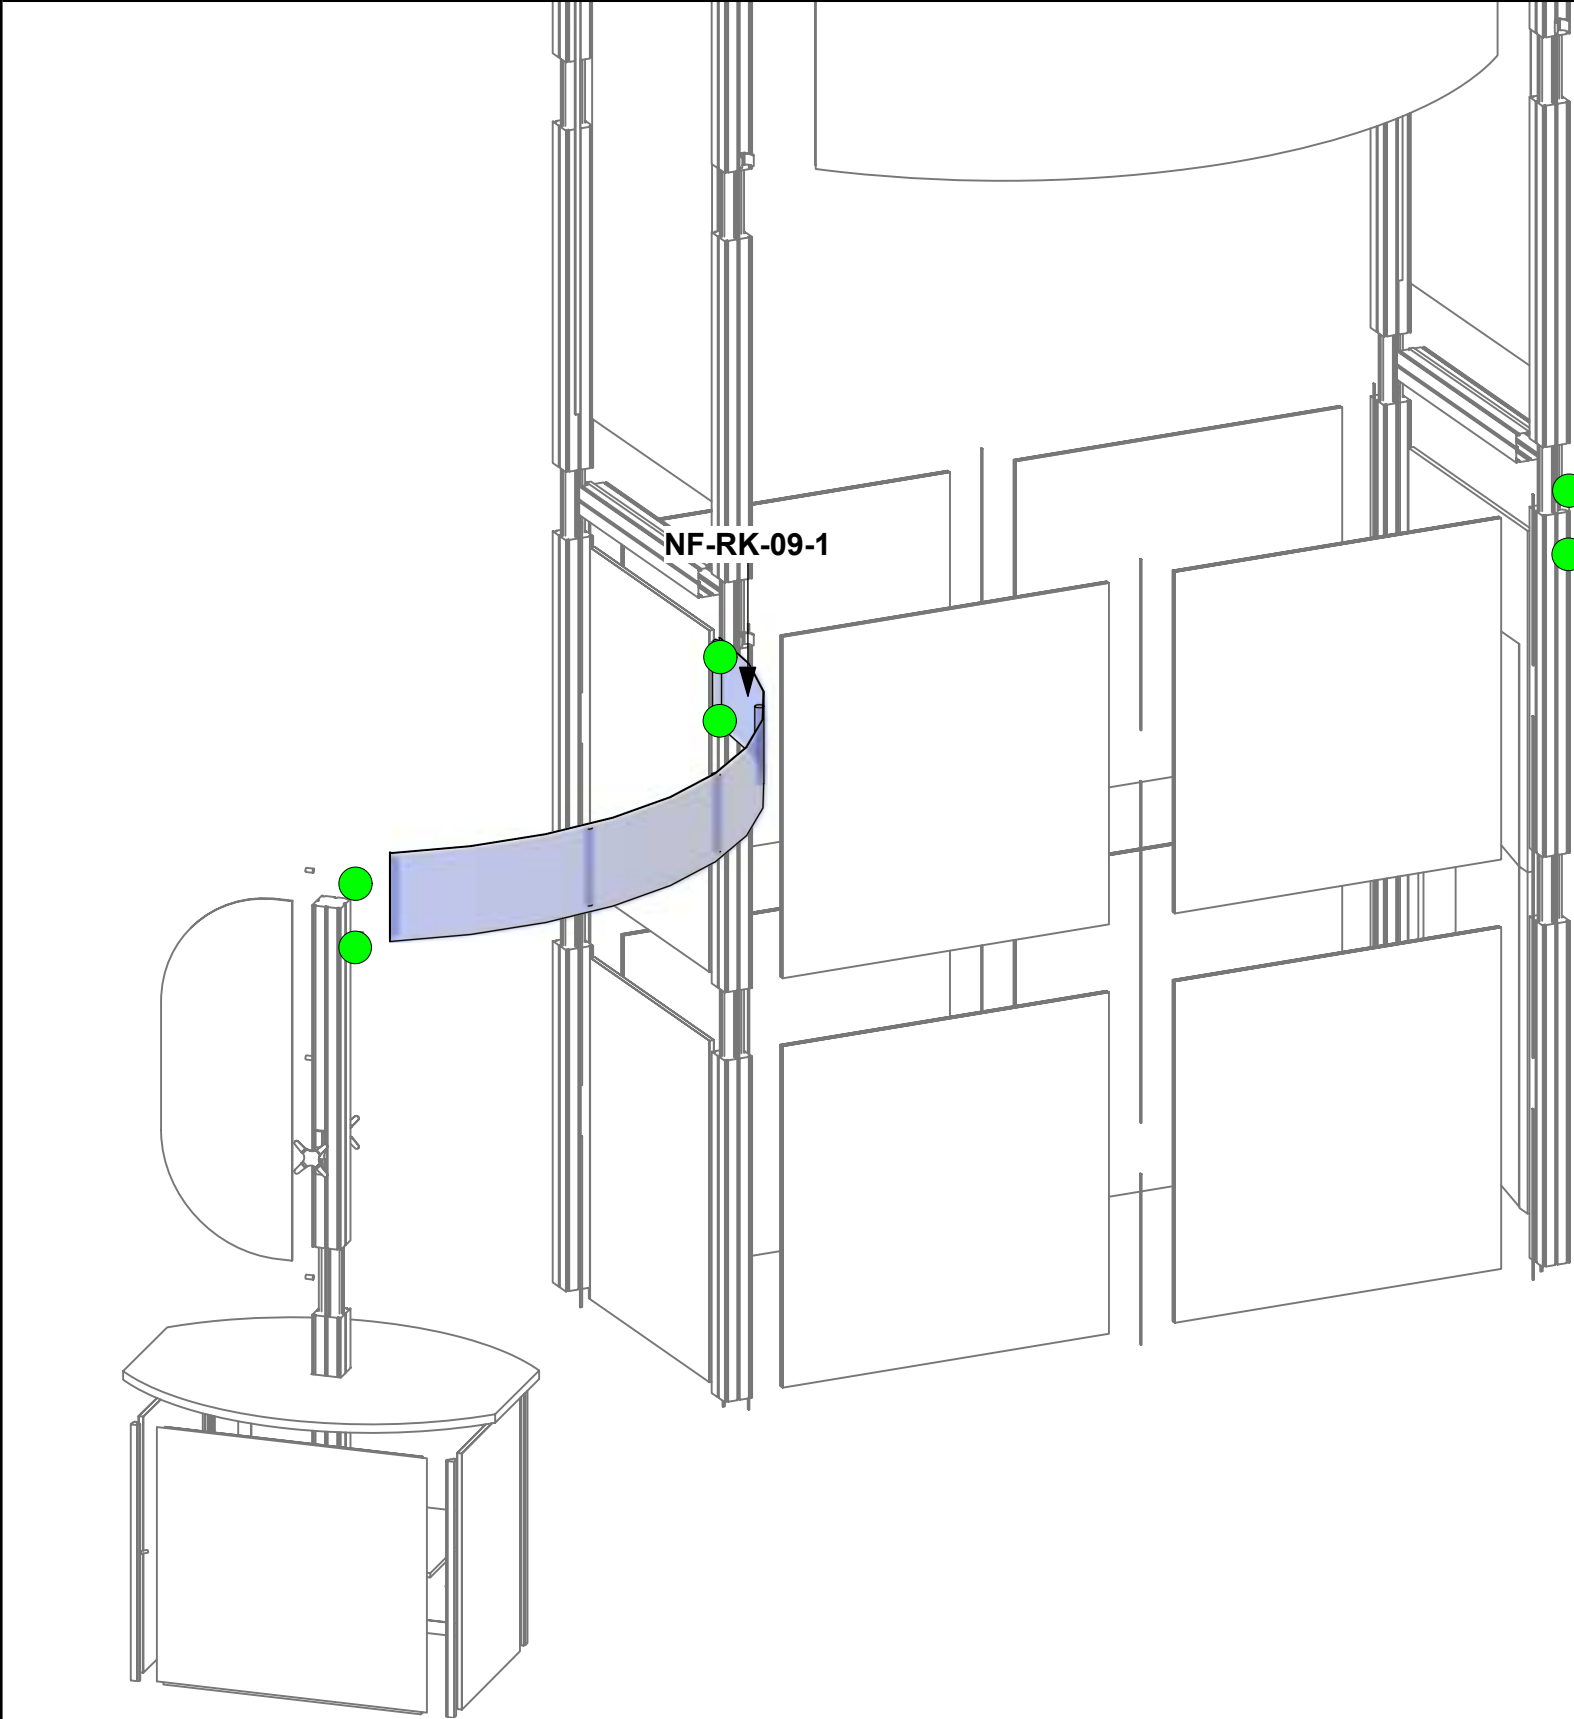

PLEASE SEE THE NEXT PAGE FOR  
DETAILED SETUP INSTRUCTIONS

NF-RK-09-1

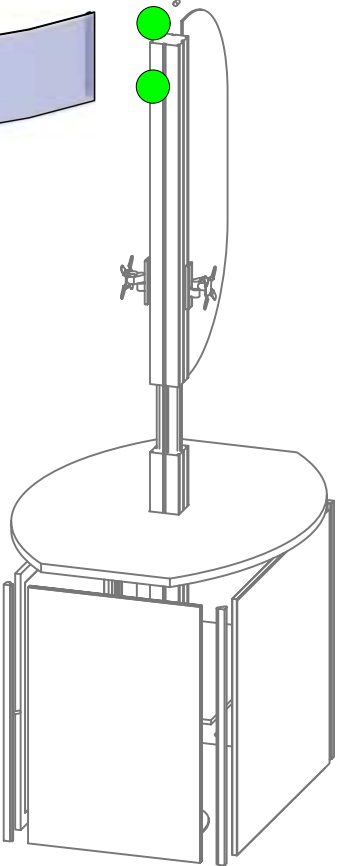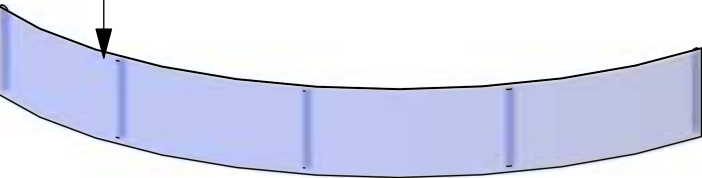

TC-30

1- SLIDE CLAMP INTO PROPER CHANNEL

2- SECURE CLAMP WITH PHILIPS SCREWDRIVER


3- PLACE TUBE STRUCTURE AND GENTLY TIGHTEN WITH 3/16" T HANDLE

1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.


2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference.  
 "Nominal" refers to approximate size.

2400mm = (94 1/2")	Phone Line / Fax
2100mm = (82 5/8")	Internet connection
1800mm = (70 7/8")	Outlet
1500mm = (59")	Main Drop (point of distrution)
1200mm = (47 1/4")	
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	

Wire running under carpet



PM4U



PM4S2



PH2C



L90S









L180N

HYBRID PRO RENTAL KIT

Title: SET-UP INSTRUCTIONS

Code	#	Description
R57	1	900MM V x 900MM W LAMINATE PANEL
R74	2	900MM V x 600MM W LAMINATE PANEL
L90S-900	4	900MM 90 DEGREE SILVER LINK EXTRUSION
R56	1	900MM W x 900MM V LAMINATE CABINET DOOR PANEL

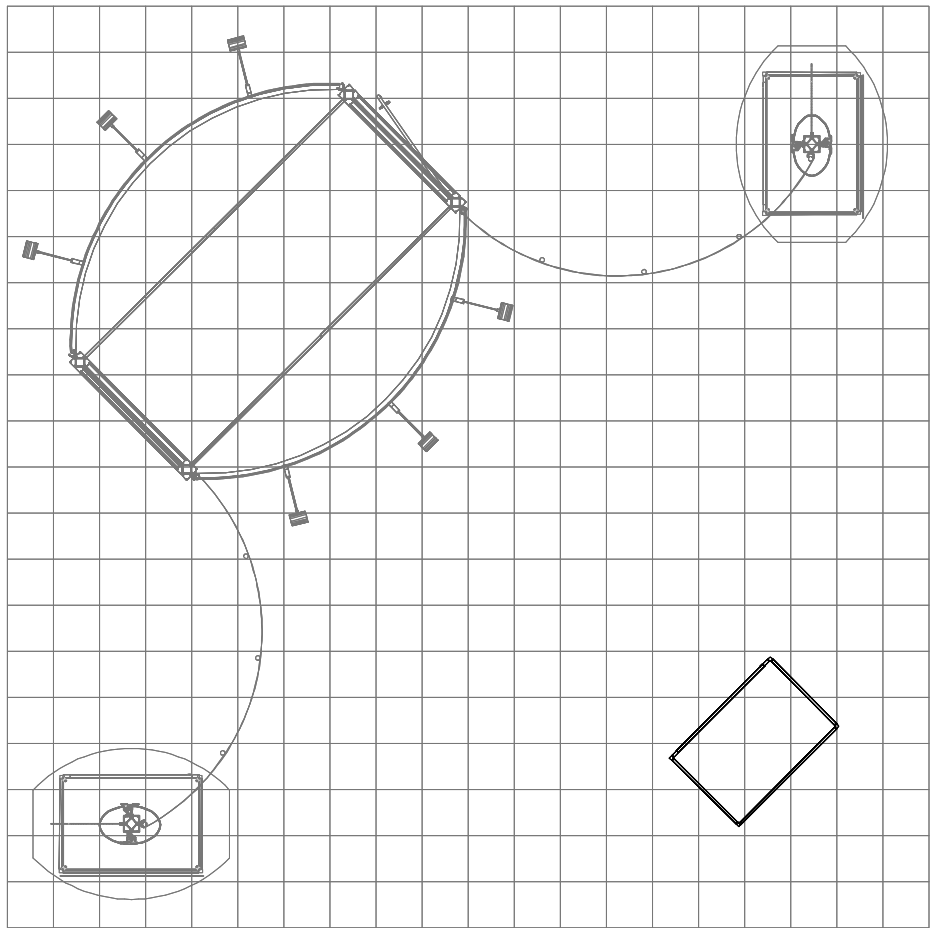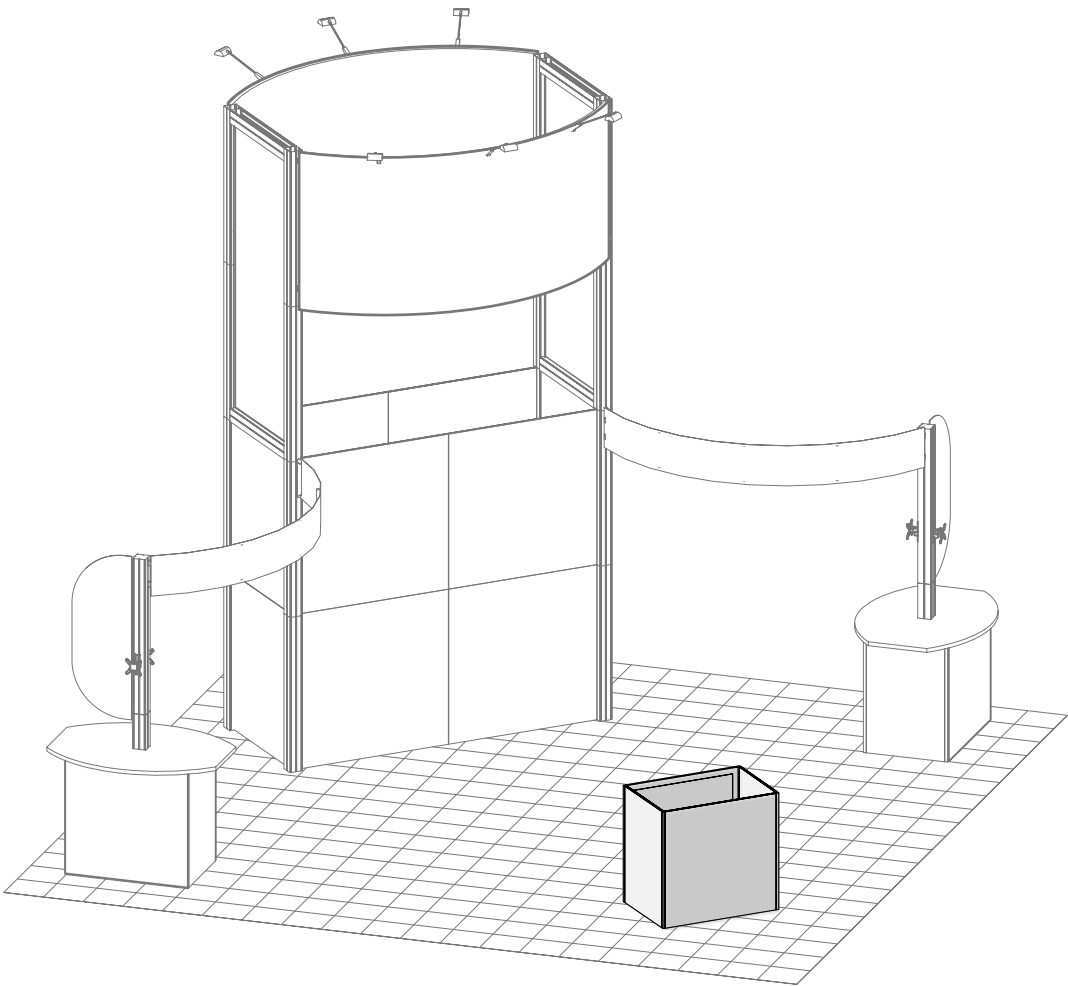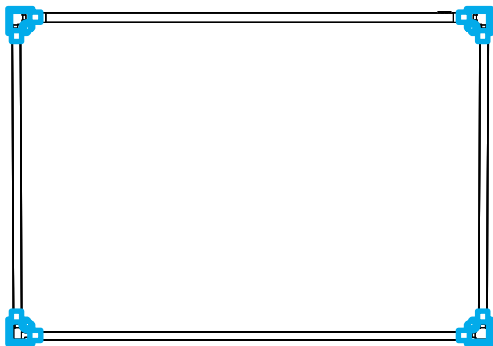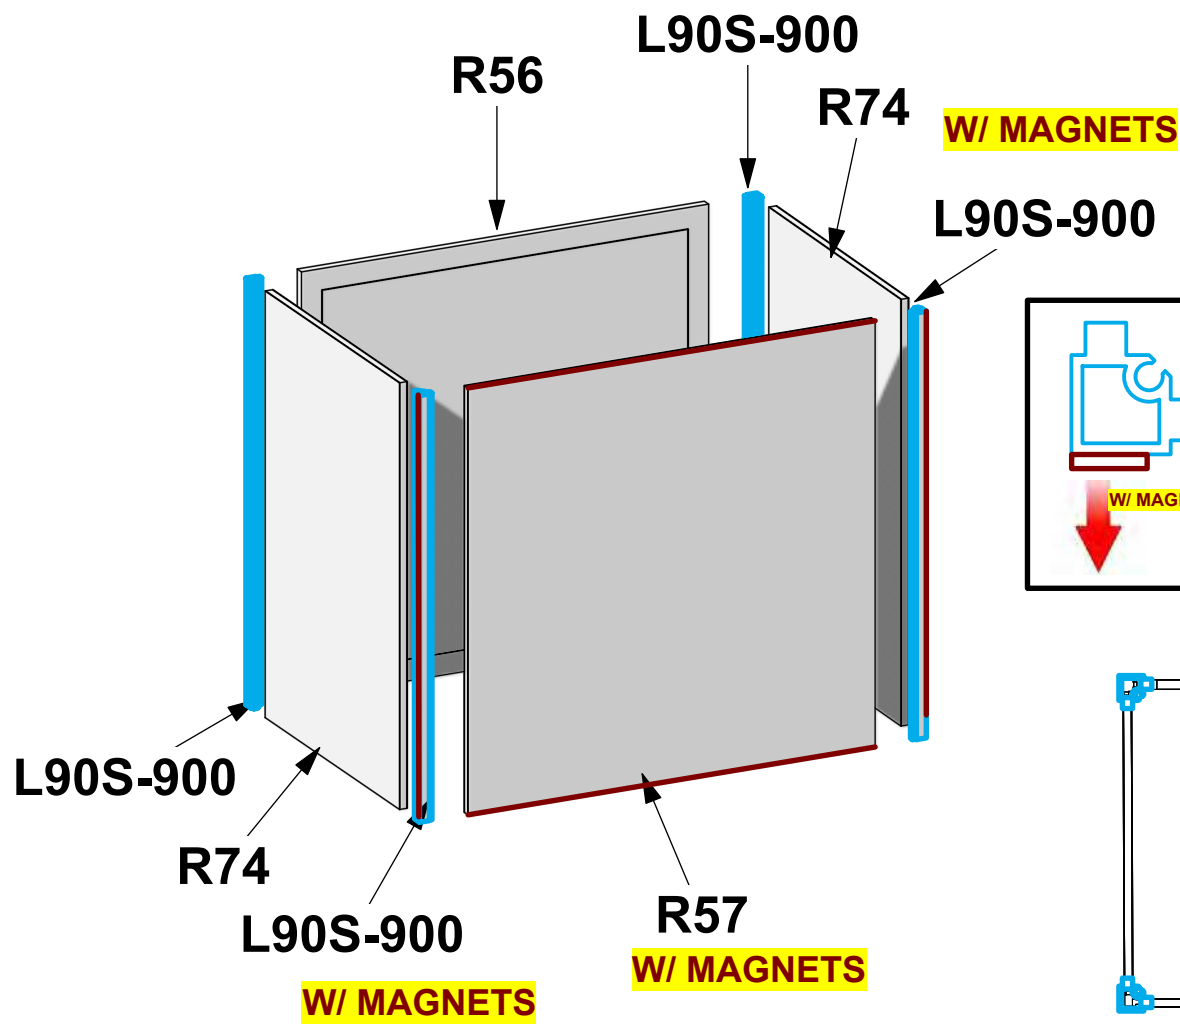


1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.


2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")  
2100mm = (82 5/8")  
1800mm = (70 7/8")  
1500mm = (59")  
1200mm = (47 1/4")  
900mm = (35 1/2")  
600mm = (23 5/8")  
300mm = (11 7/8")

Phone Line / Fax  
Internet connection  
Outlet  
Main Drop (point of distrution)  
Wire running under carpet



PM4U



PM4S2



PH2C



L90S








L180N

HYBRID PRO RENTAL KIT

Title: SET-UP INSTRUCTIONS



Code	#	Description
CT-54L	1	5' X 4' LAMINATE COUNTER TOP
R15	1	1200MM PM4S2 SILVER EXTRUSION WITH PH2 STOP AT 302MM
PM4BP1	1	15 3/4" X 9 7/8" ALUMINUM BASE PLATE
INTERNAL SH	1	BLACK INTERNAL SHELF
SS1	4	SHELF SUPPORT PIN (SILVER)

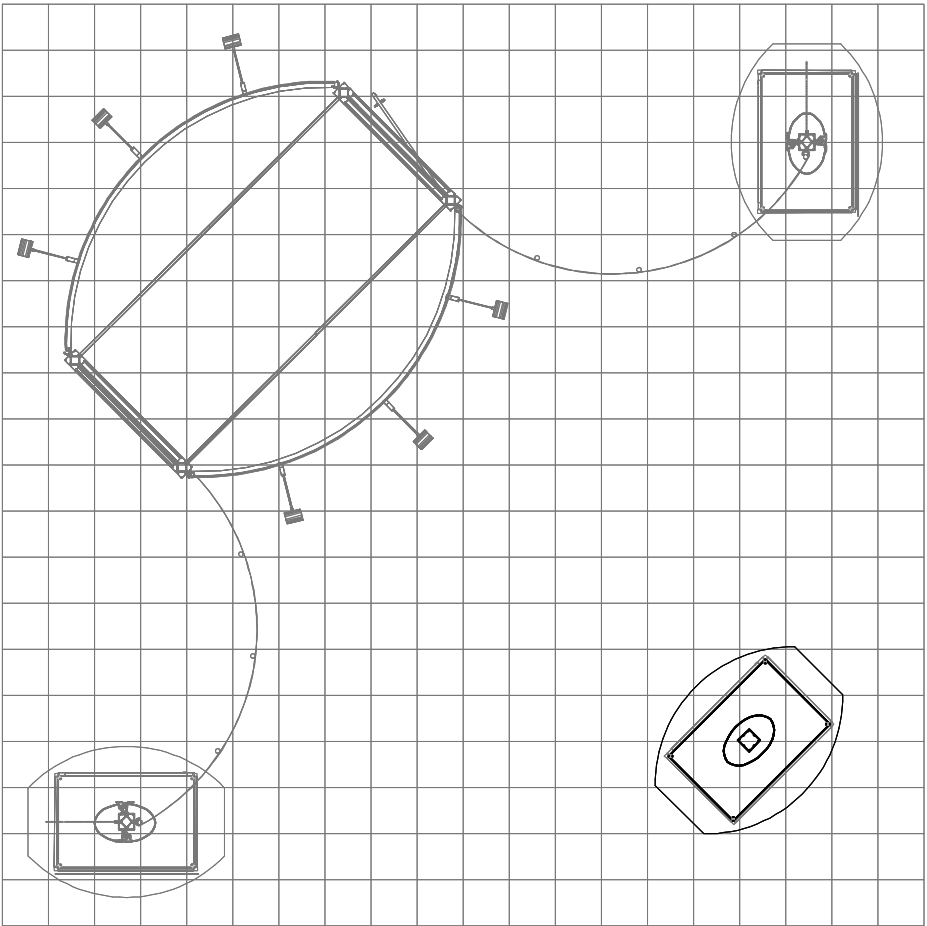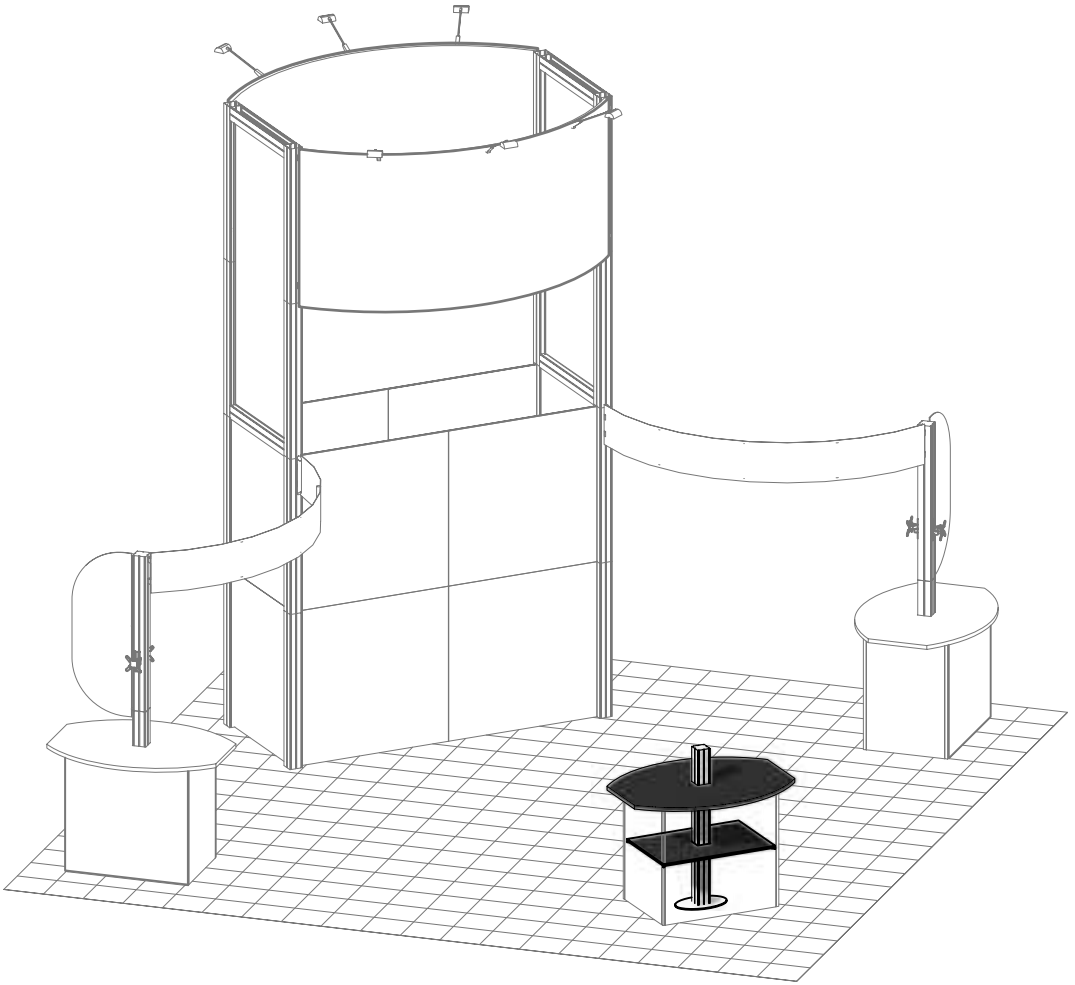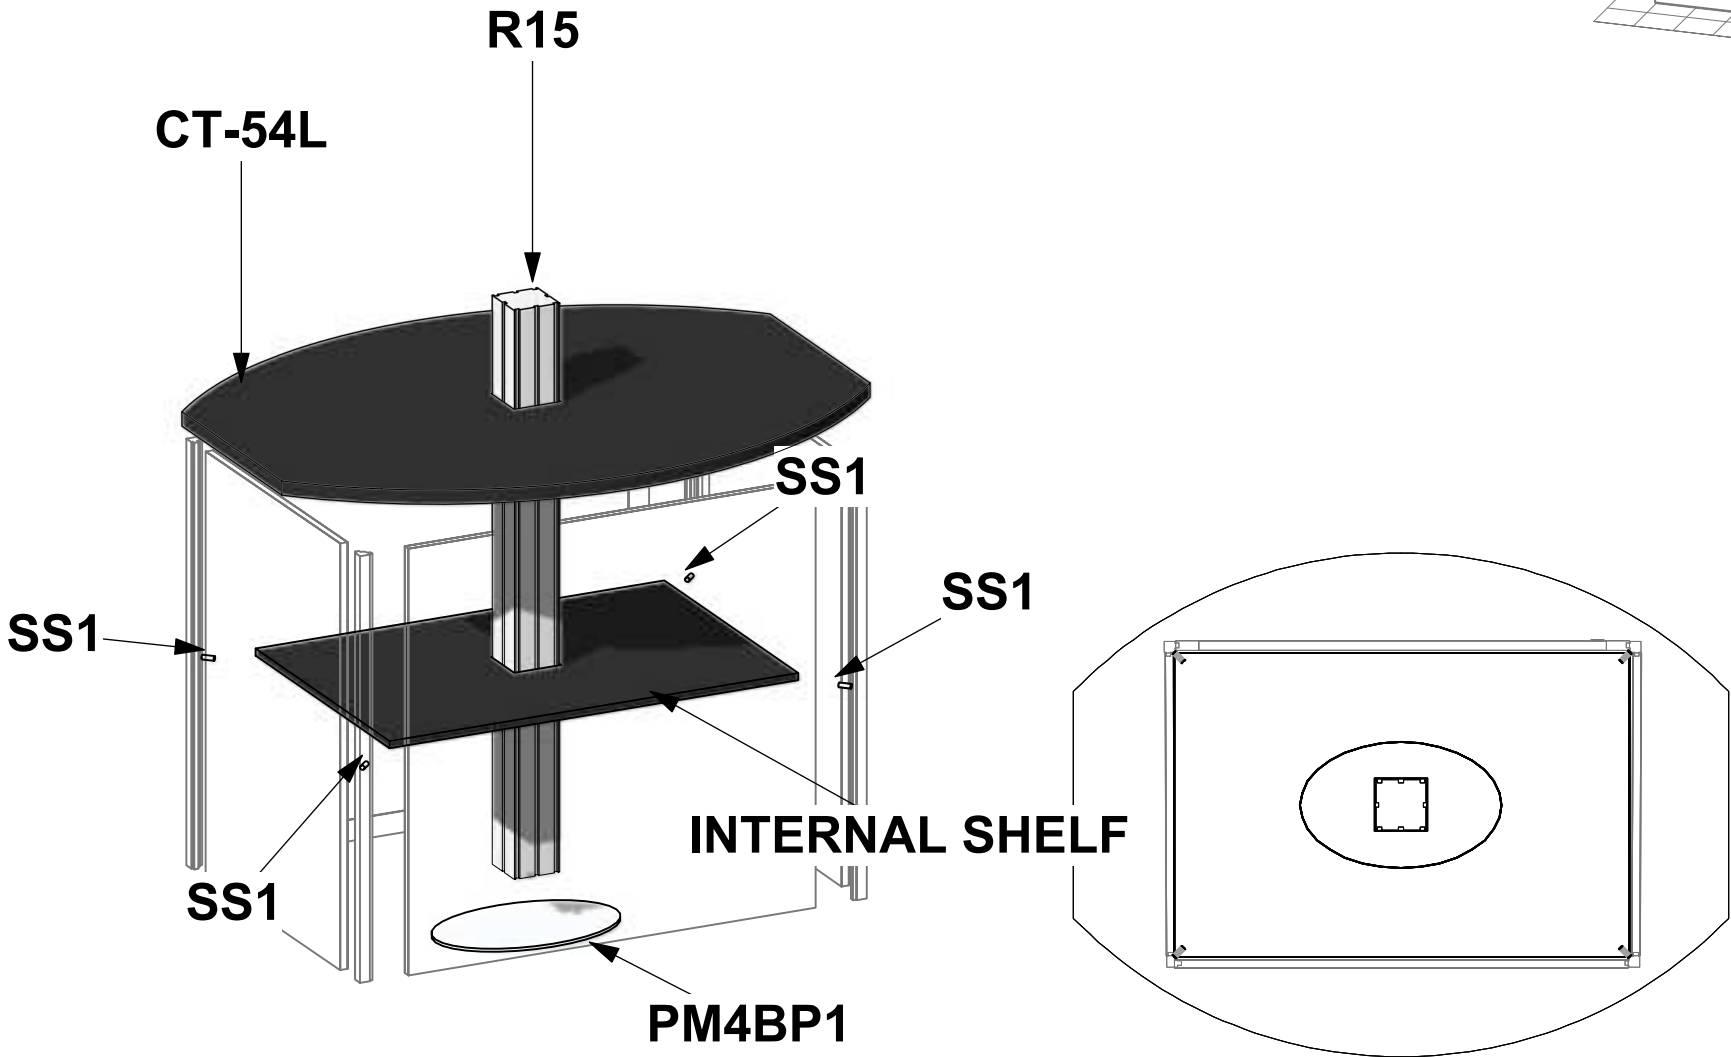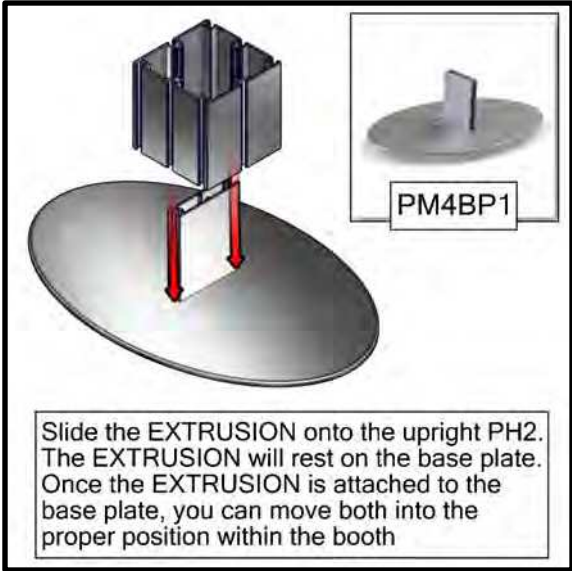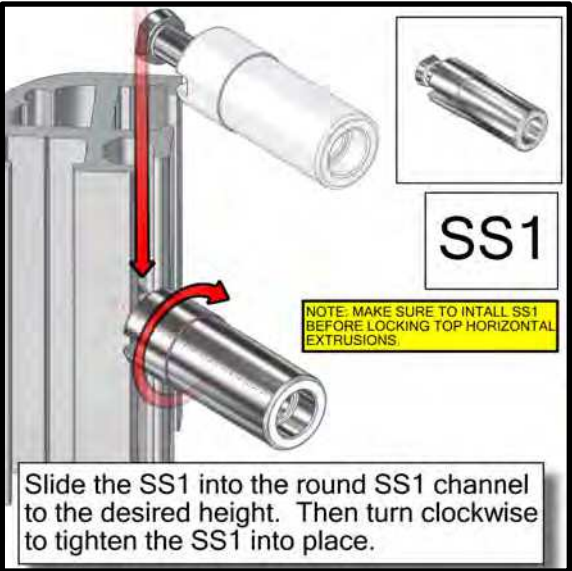


1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")  
2100mm = (82 5/8")  
1800mm = (70 7/8")  
1500mm = (59")  
1200mm = (47 1/4")  
900mm = (35 1/2")  
600mm = (23 5/8")  
300mm = (11 7/8")


Phone Line / Fax  
Internet connection  
Outlet  
Main Drop (point of distrution)  
Wire running under carpet

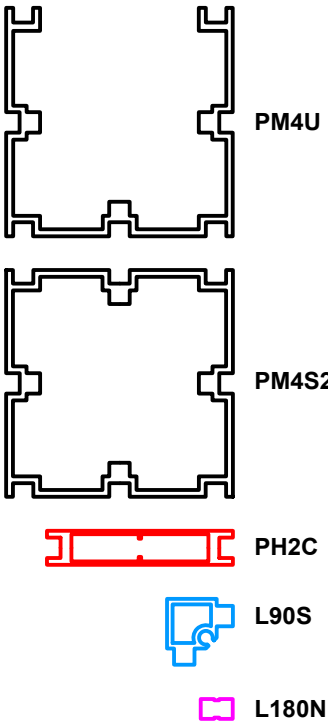

HYBRID PRO RENTAL KIT

Title: SET-UP INSTRUCTIONS

	Code	#	Description
	R15	1	1200MM PM4S2 SILVER EXTRUSION WITH PH2 STOP AT 302MM
	R13	1	600MM PH2 CONNECTOR WITH TENSION GLIDES

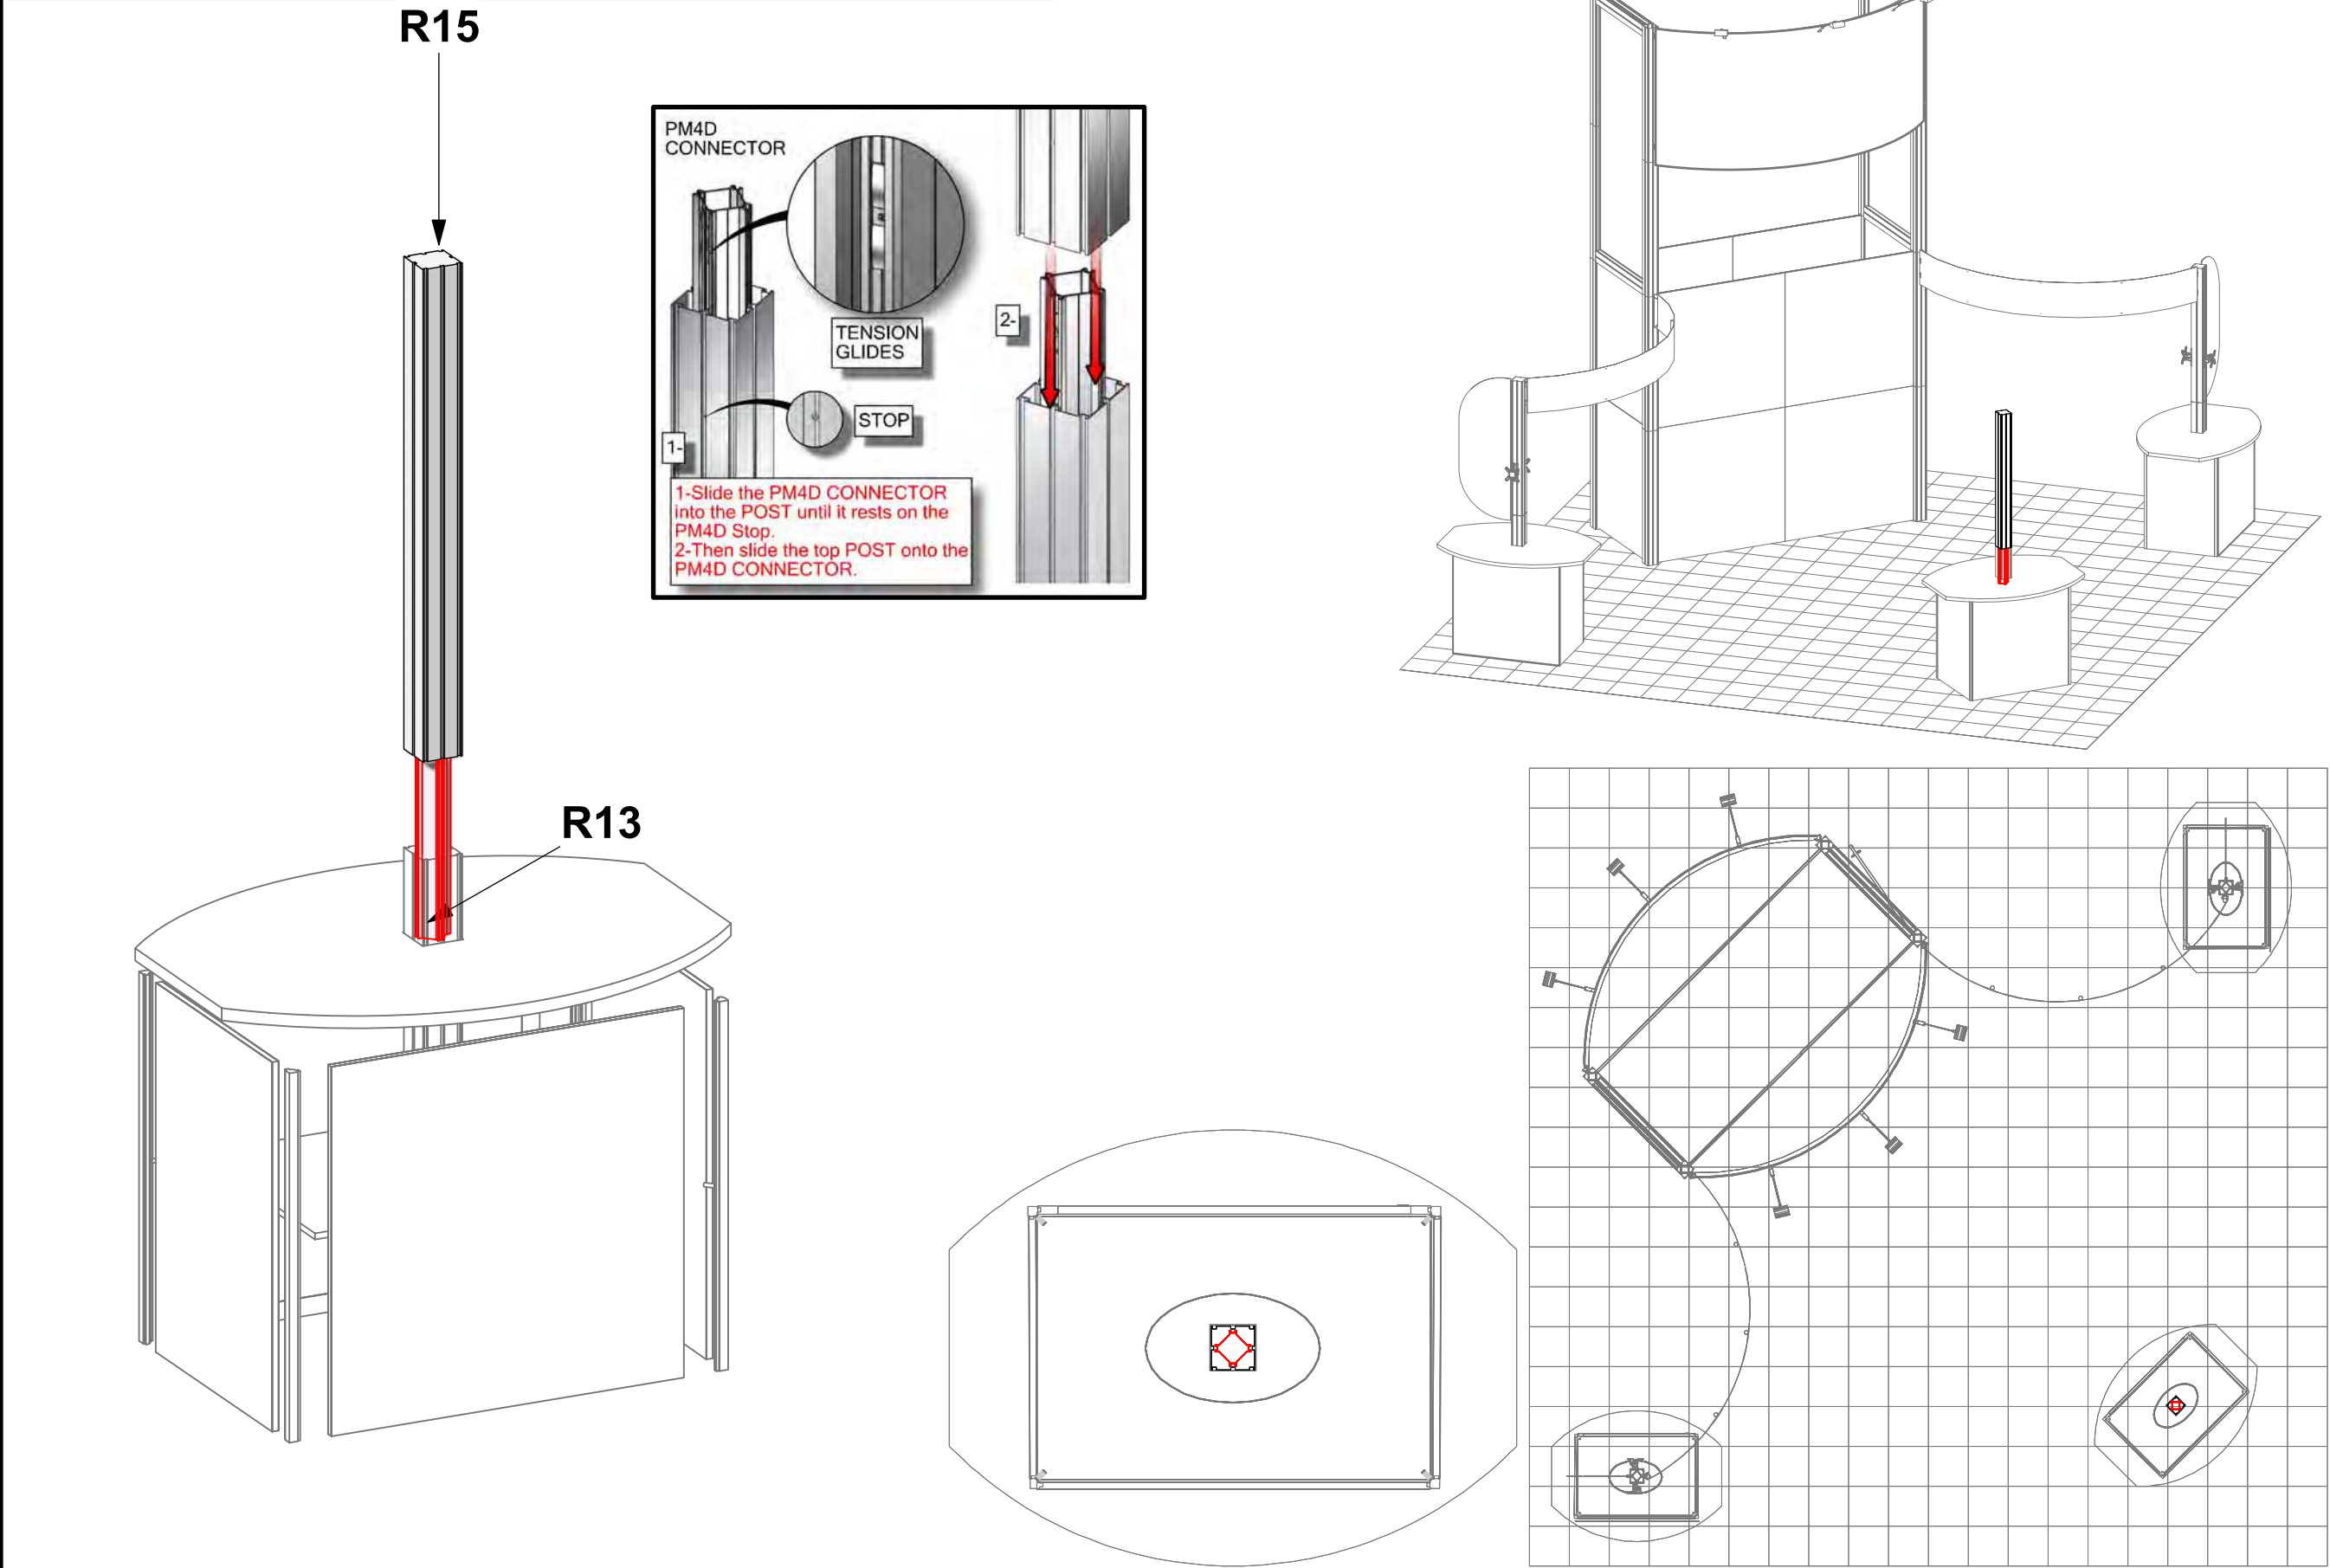


1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")	Phone Line / Fax
2100mm = (82 5/8")	Internet connection
1800mm = (70 7/8")	Outlet
1500mm = (59")	Main Drop (point of distrution)
1200mm = (47 1/4")	
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	







Wire running under carpet

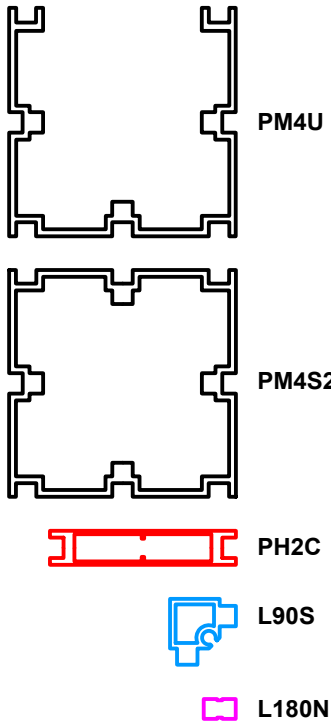

HYBRID PRO RENTAL KIT

Title: SET-UP INSTRUCTIONS

Code	#	Description
GRAPHIC D2	1	49.75" X 18" DSG DOUBLE SIDED GRAPHIC ON 6MM SINTRA
CKAPS	3	CABLE KIT 7MM PANEL SUPPORT (MULTI ANGLE)
GRAPHIC E2	1	35 3/16" (H) X 37 1/4" (W) ROLLABLE DETACHABLE DSG GRAPHIC WITH
SM-BRACKET	2	SMALL MONITOR BRACKET

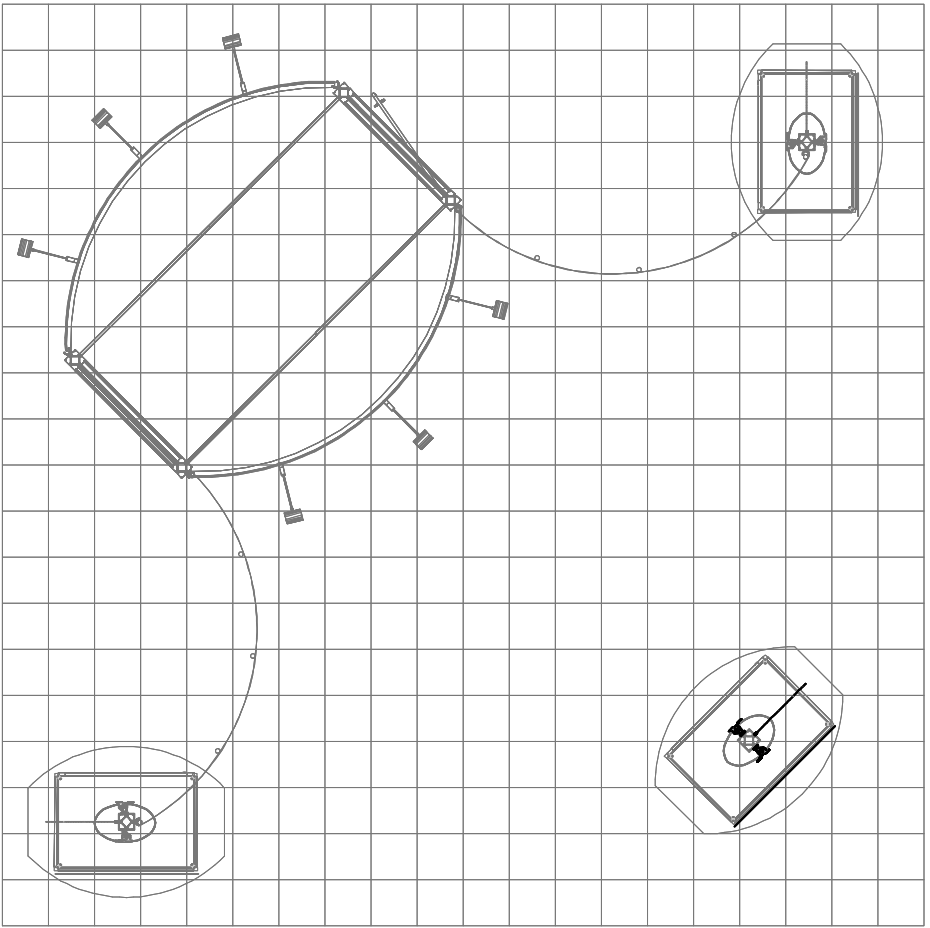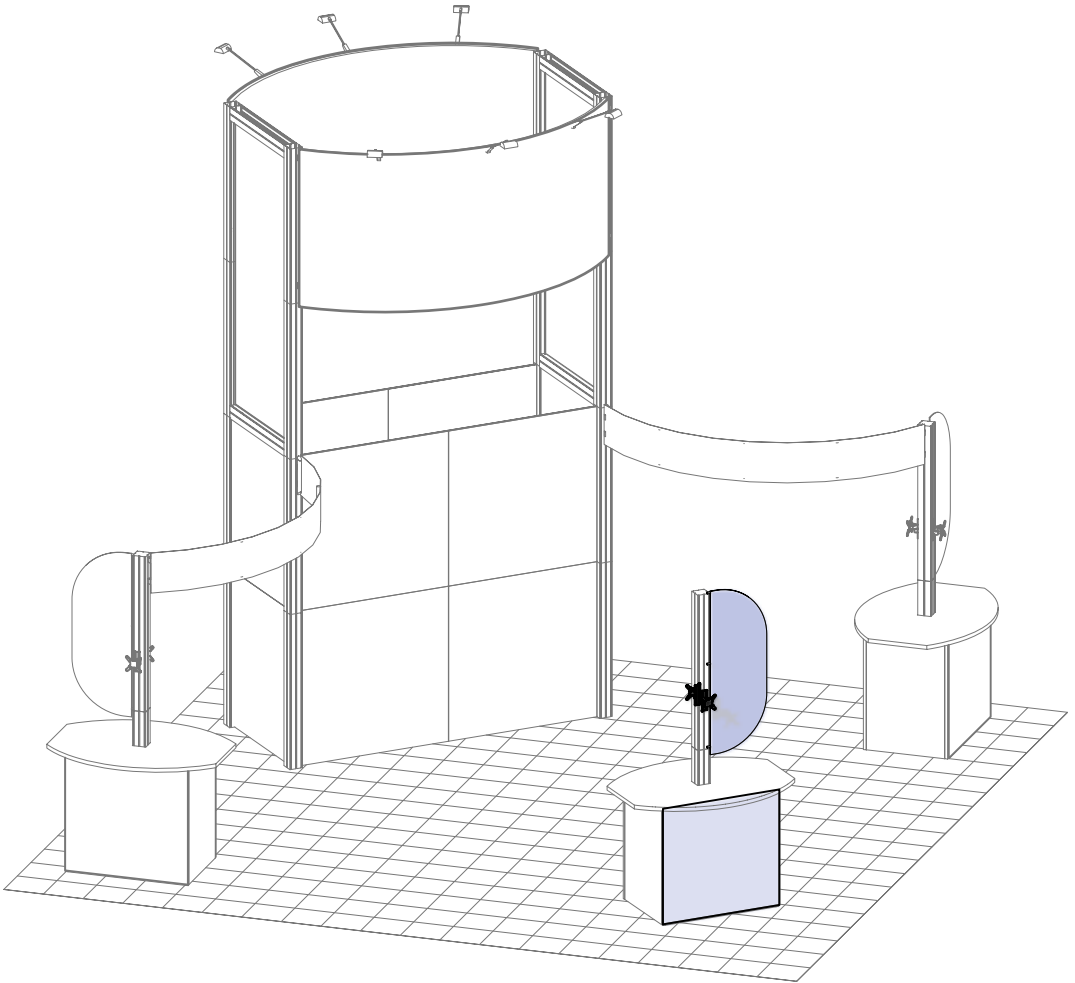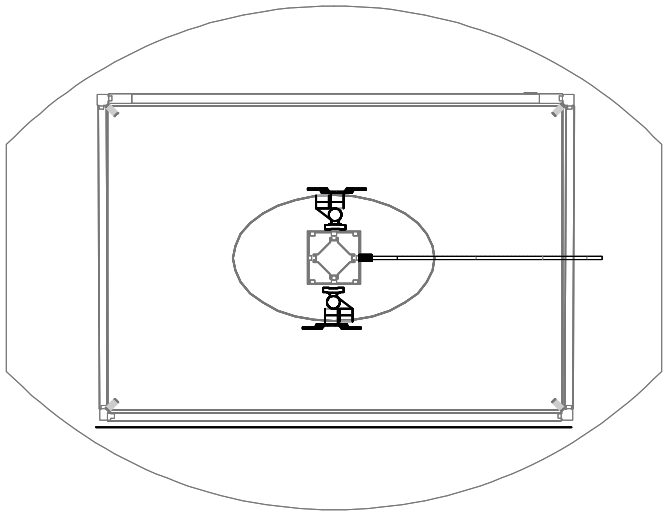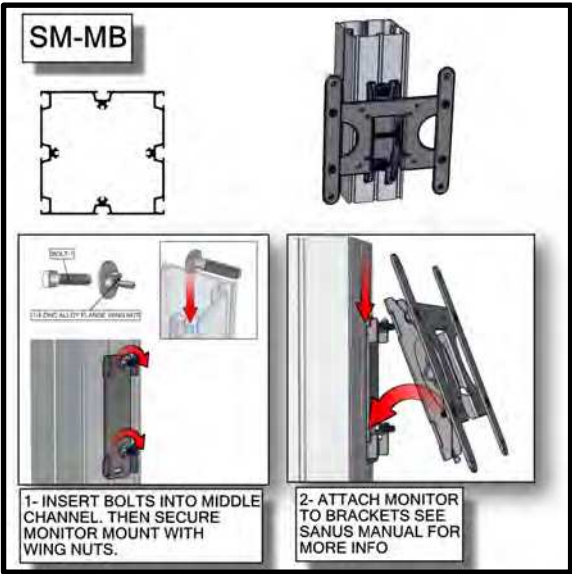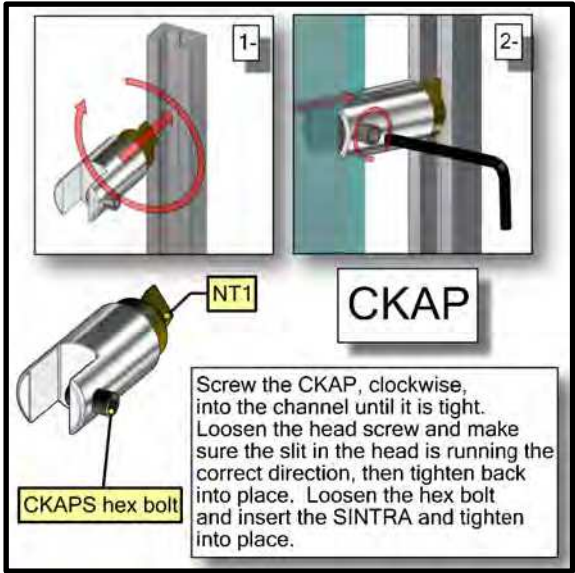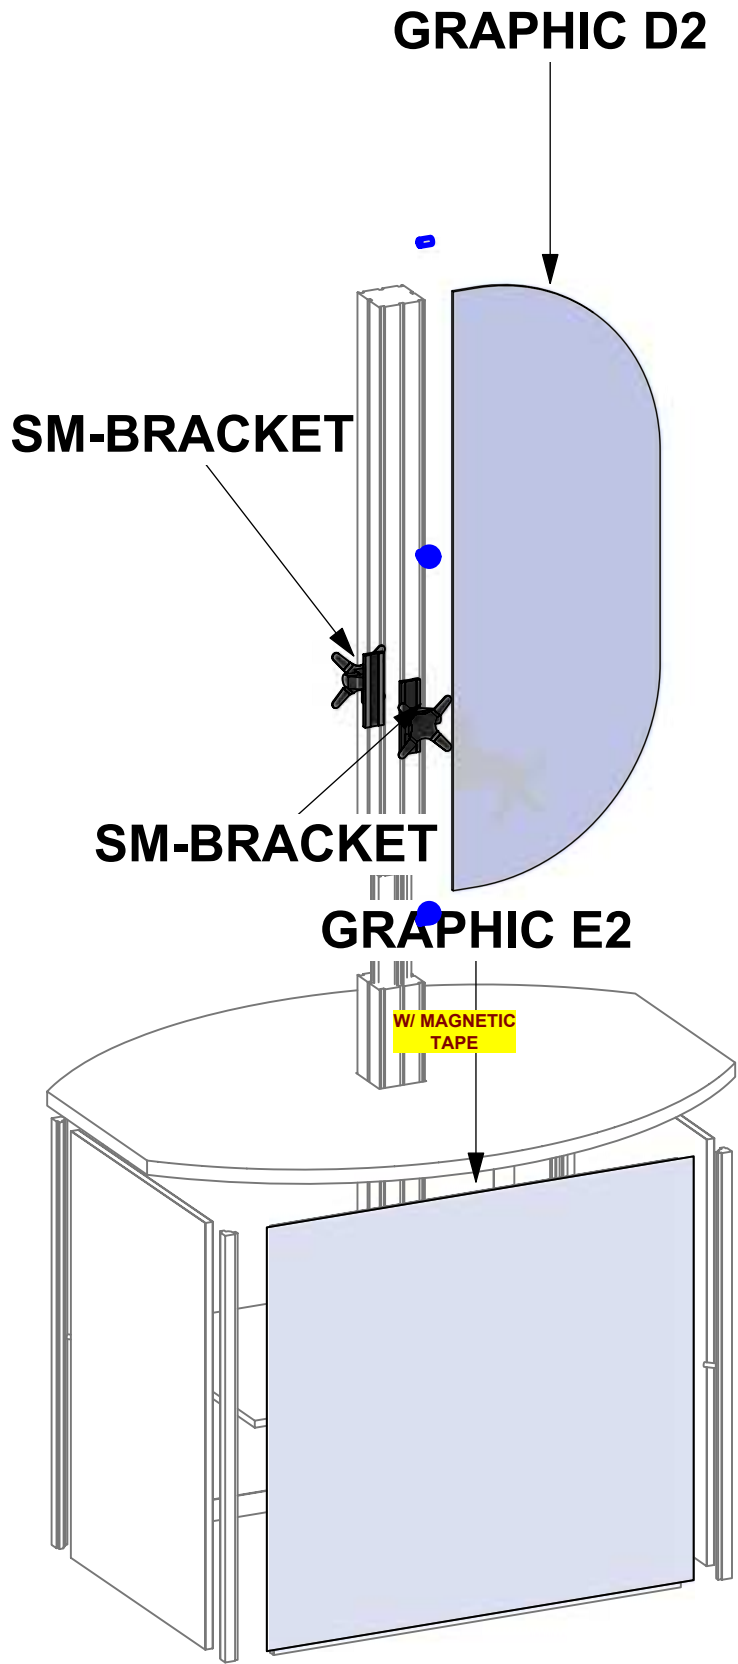


1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")  
2100mm = (82 5/8")  
1800mm = (70 7/8")  
1500mm = (59")  
1200mm = (47 1/4")  
900mm = (35 1/2")  
600mm = (23 5/8")  
300mm = (11 7/8")

Phone Line / Fax  
Internet connection  
Outlet  
Main Drop (point of distrution)  
Wire running under carpet

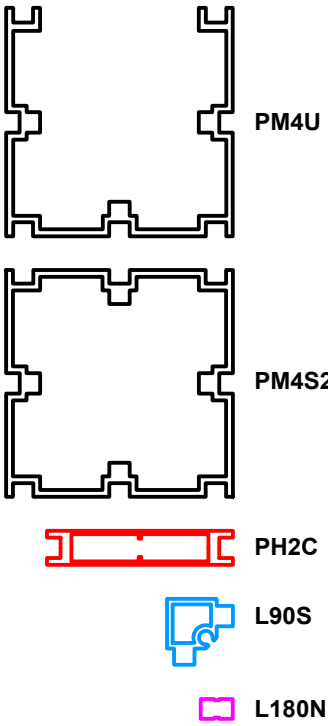


HYBRID PRO RENTAL KIT


Title: SET-UP INSTRUCTIONS

# **PACKING INSTRUCTIONS**




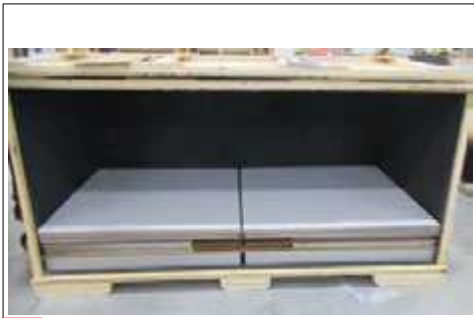


5

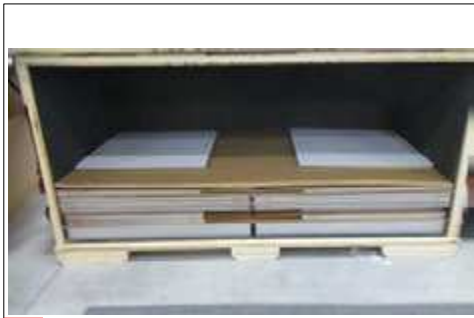

10

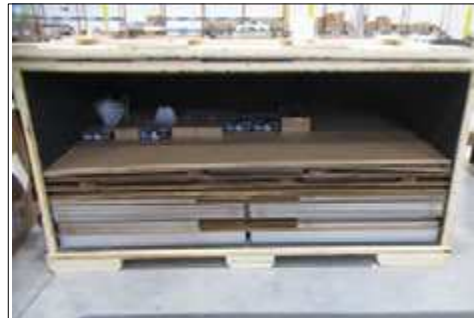


15

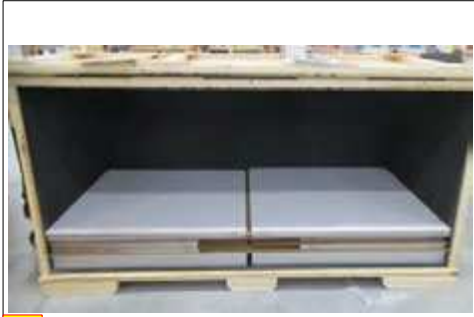


4




9

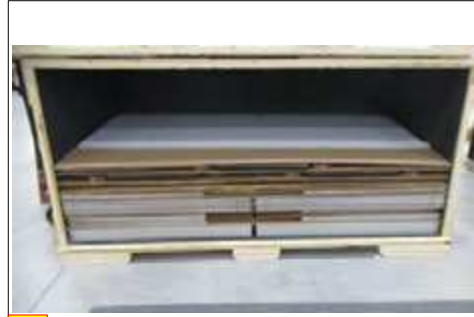

14

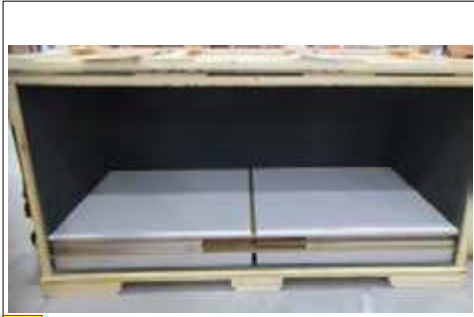

3

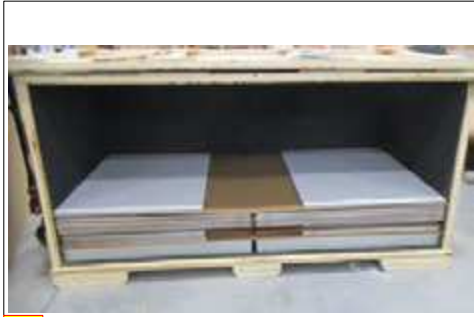

8



13



2



7



12



1



6



11



15 (6) SM-MB, (3) PM4BP1, (6) LEDL 10S LIGHTS, (1) STEAME  
HARDWARE BOX

14 (1) R69

13 (1) CT-54L

12 (2) CT-54L

11 (3) INTERNAL SHELVES

10 (2) R56

9 (1) R57, (1) R56

8 (2) R71

7 (2) R57

6 (2) R70

5 (2) R70

4 (2) R70

3 (2) R70, (4) R67, (4) R68, (6) R74

2 (2) R35, (2) R66, (15) R13, (20) L180-600, (10) L180N-1200,  
(12) L90S-900

1 (22) R15

## CASE # 1

LEGEND		GREY FOAM FOLDED TO FILL EMPTY SPACES OR USED AS PROTECTION
		1/8" CARDBOARD SPACER (PUT IN BETWEEN EVERY PANEL)
		DIVIDER
		1/4" WHITE FOAM (USED AS PROTECTION DOOR PANELS W/ LOCKS)

