



# ONEFABRIC®

## Graphic Installation

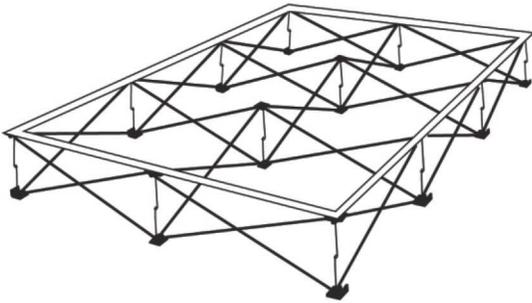


1

Assemble frame and lay flat on its back.  
Remove existing graphic.

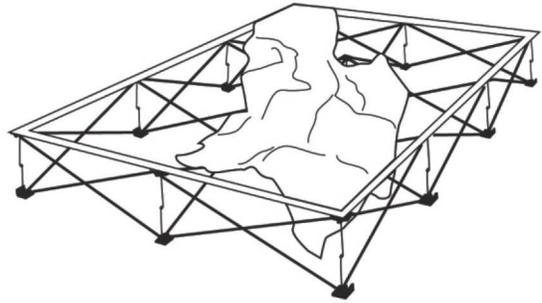

2

Starting at one corner, attach Velcro® on graphic to Velcro® on frame.  
Overlap Velcro® of graphic a 1/4" on all sides of Velcro® of frame.  
Note: Velcro® should not be flush.

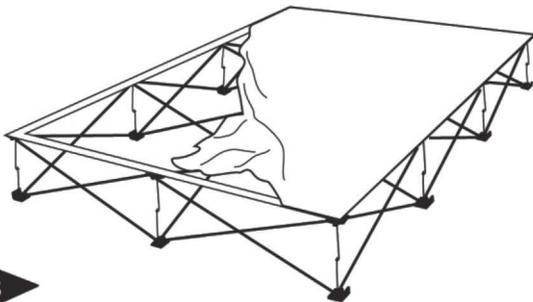


3

Work in continuous direction around the frame  
until graphic is completely attached.



4

If needed, adjust Velcro® for taut fit.

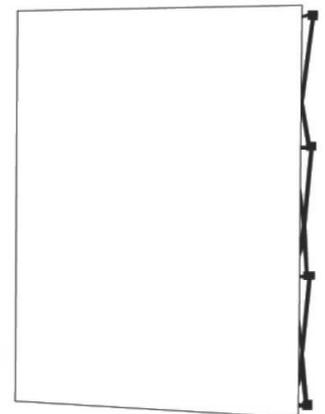

**WARNING! DO NOT FORCE CLOSED.**

To avoid damage, all hooks must be  
disconnected before collapsing frame.

# ONEFABRIC®


## Setup Instructions




1 Remove frame and graphic from bag.




2 Ensure "adjustable knobs" of frame are on the floor. Pull up display into upright position.

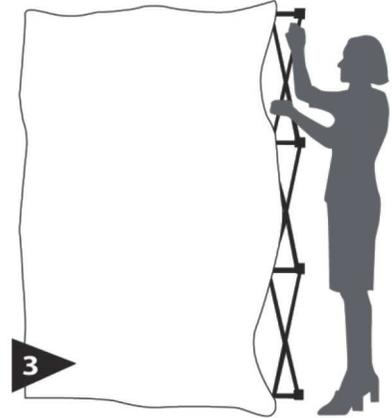


3 Lock all hooks between front and back hubs.

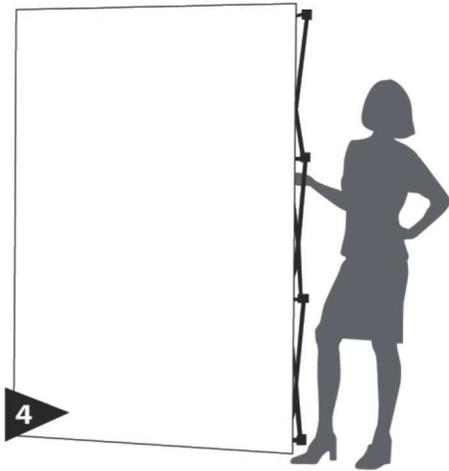

4 Adjust leveling knobs for desired angle. OneFabric™ display can now be moved easily into position.

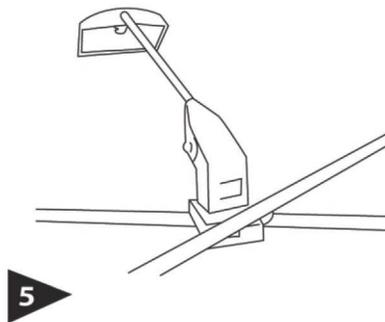

5 **OPTIONAL**  
Attach lights to top of frame by sliding the plastic X Blocks under the frames cross sections.

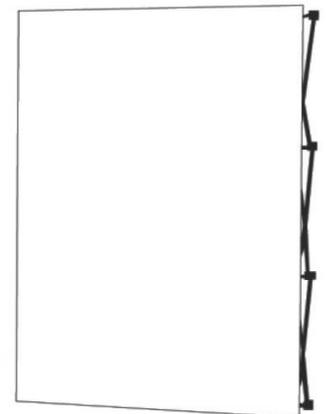

**WARNING! DO NOT FORCE CLOSED.**

To avoid damage, all hooks must be disconnected before collapsing frame.