

MODify Single Sided Kit 05

MODify™ is a one-of-a-kind Modular Merchandising System that is made up of interchangeable fixtures and accessories that can be easily assembled, disassembled, and rearranged to create a variety of different display configurations. The MODify system incorporates SEG push-fit fabric graphics that enable you to brand, promote and merchandise with ease.

MODify Single Sided Kit 05 combines one slatwall panel and one SEG push-fit graphic panel to create the ideal retail display. With this kit, you can showcase your products with ease by using fixtures like hooks, shelves, waterfalls, or faceout bars; add Ubars and towel bars too! Moreover, the kit allows for easy swapping of the graphic panel for seasonal changes, brand changes, product changes and promotions.



MODify Single Sided Kits should be mounted to a wall or structure for safety and stability.

We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications

features and benefits:








Base Kit includes:

- Frame, slatwall, shelf and base colors in kit are all the same, your choice of all white, black, or silver
- Heavy-duty aluminum frame, steel base
- Steel, slotted uprights
- One 35"W x 96"H slatwall panel
- One 35"W x 93"H SEG push-fit graphic panel
- Non-rolling base
- Display is easy to assemble and install
- Lifetime hardware warranty against manufacturer defects

Optional Accessories Include:

- Towel bars.
- Faceout bars
- Waterfalls
- Nesting Tables 03 & 04
- U bars
- Slatwall hooks
- Shelves

dimensions:

Hardware	Shipping
Assembled unit: 74"W x 96"H x 19"D 1879.6mm(w) x 2438.4mm(h) x 482.6mm(d) Approximate Weight: 129 lbs / 58.5134 kg	Packing case(s): 1 Box Shipping dimensions: (96"L x 14"H x 24"D) 2438.4mm(l) x 355.6mm(h) x 609.6mm(d) Approximate shipping weight: 188 lbs / 85.2754 kg
Graphics	additional information:
Graphic material: Dye-sublimated fabric See graphic templates for graphic sizes. Refer to related graphic templates for more information Visit: https://www.theexhibitorshandbook.com/downloads/download-graphic-templates or click here	Powder coat color options:  white  black  silver Wood laminate color options:  white  black  natural  gray


MODify Accessories

All Accessories available in white, black, or silver


Slotwall Accessories



MFY-SLT-HK
4", 6", 8", 10" & 12"



MFY-SLT-FC
6", 8", 10" & 12"

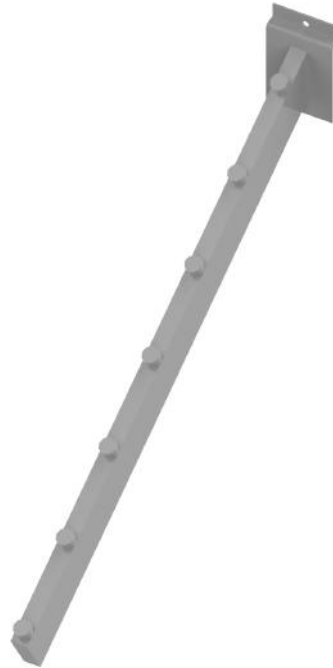

MFY-SLT-WTR-16-7

U-Bar Accessories




MFY-TWL-FC
6", 8" & 10"




MFY-UBR-FC
6", 8" & 10"

Shelf and Hanger Bars

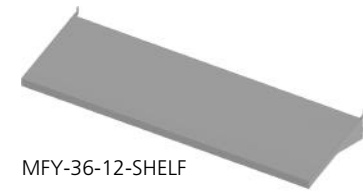

MFY-36-12-SHELF

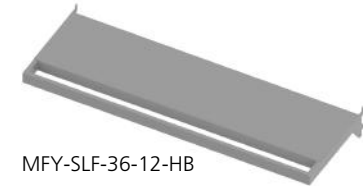


MFY-SLF-36-12-HB



MFY-SLT-TWL-36-3



MFY-UBR-36-12

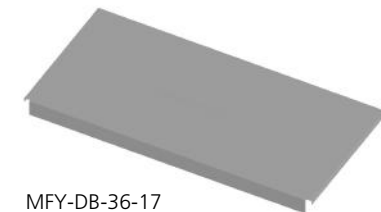

MFY-DB-36-17

Tools Required



MULTI HEX KEY
(INCLUDED)



PHILLIPS SCREW DRIVER
(NOT INCLUDED)




9/16" SOCKET WRENCH
(NOT INCLUDED)

How to Apply & Remove Graphics



Installation and removal of SEG graphics is easy!

Installation: Push the SEG bead into each corner of the frame (1-4) with your thumb, then push the SEG bead into the middle of the run (5-8) and work your way around the perimeter of the frame until all beading is pushed in properly; if necessary, go around the perimeter again to ensure beading is secure in the extrusion profile.

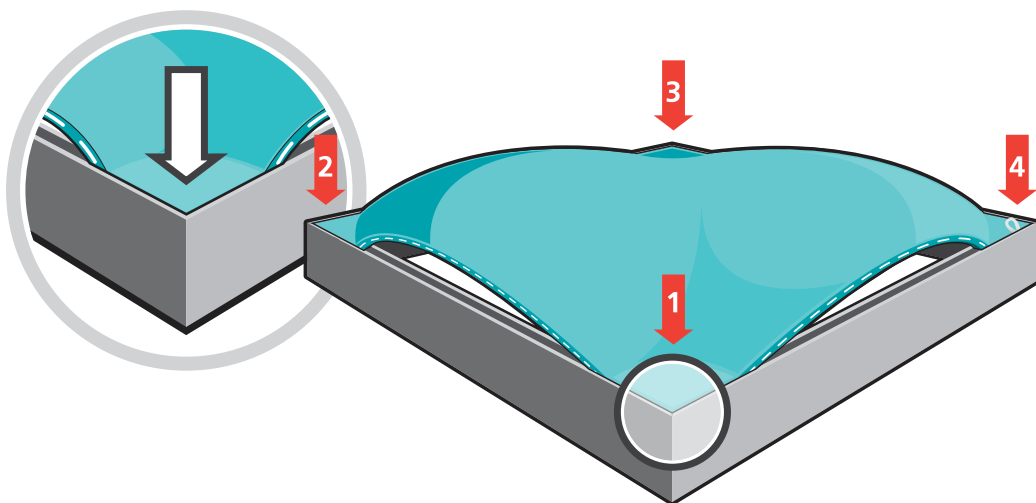




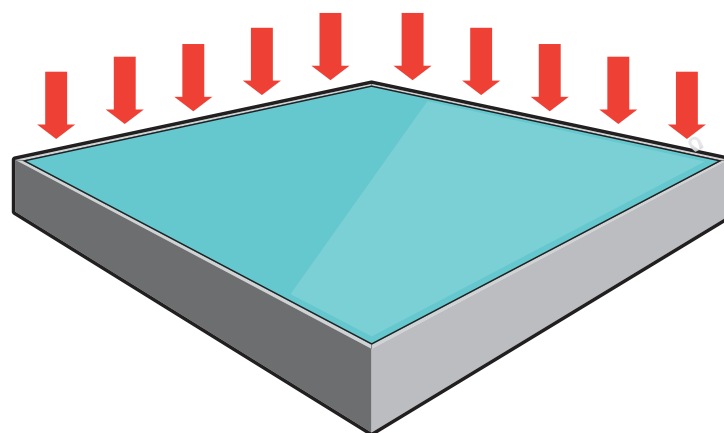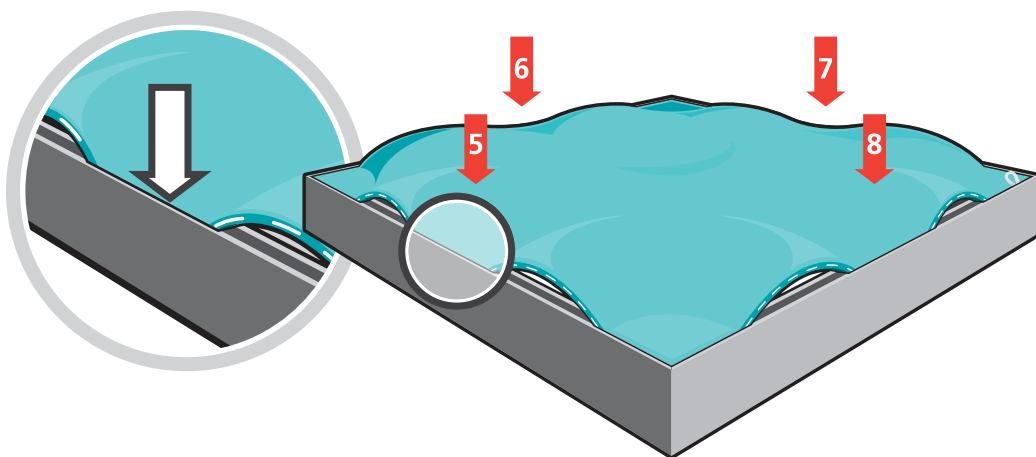


Note: Keep the set up area clean by using a drop cloth, washing hands before set-up or by wearing gloves.


Removal: Use the pull tab located on the graphic and gently pull the graphic from the frame, going around the perimeter.





Graphics Storage & Care

Graphics should be folded with the graphic facing inward and stored in a zip lock /sealable plastic bag. Spot clean by wiping with a damp white cloth. If washing is necessary, use a commercial size front-loading washing machine, gentle cycle with cool water. Line dry flat. Dry cleaning is NOT recommended to prevent shrinkage.

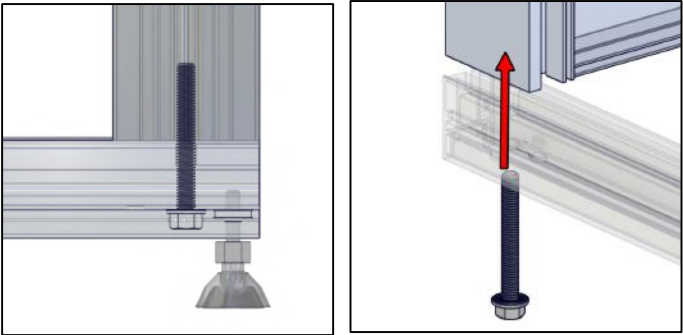


QTY	IMAGE	DESCRIPTION
3		3/8-16 x 2.5"L bolt
1		2350MM (92.52in) RIGHT UPRIGHT
3		512MM (20.16IN) SUPPORT LEG
1		2350MM (92.52in) MIDDLE UPRIGHT
2		2250MM (88.58in) OF SWC EXTRUSION
1		2350MM (92.52in) LEFT UPRIGHT

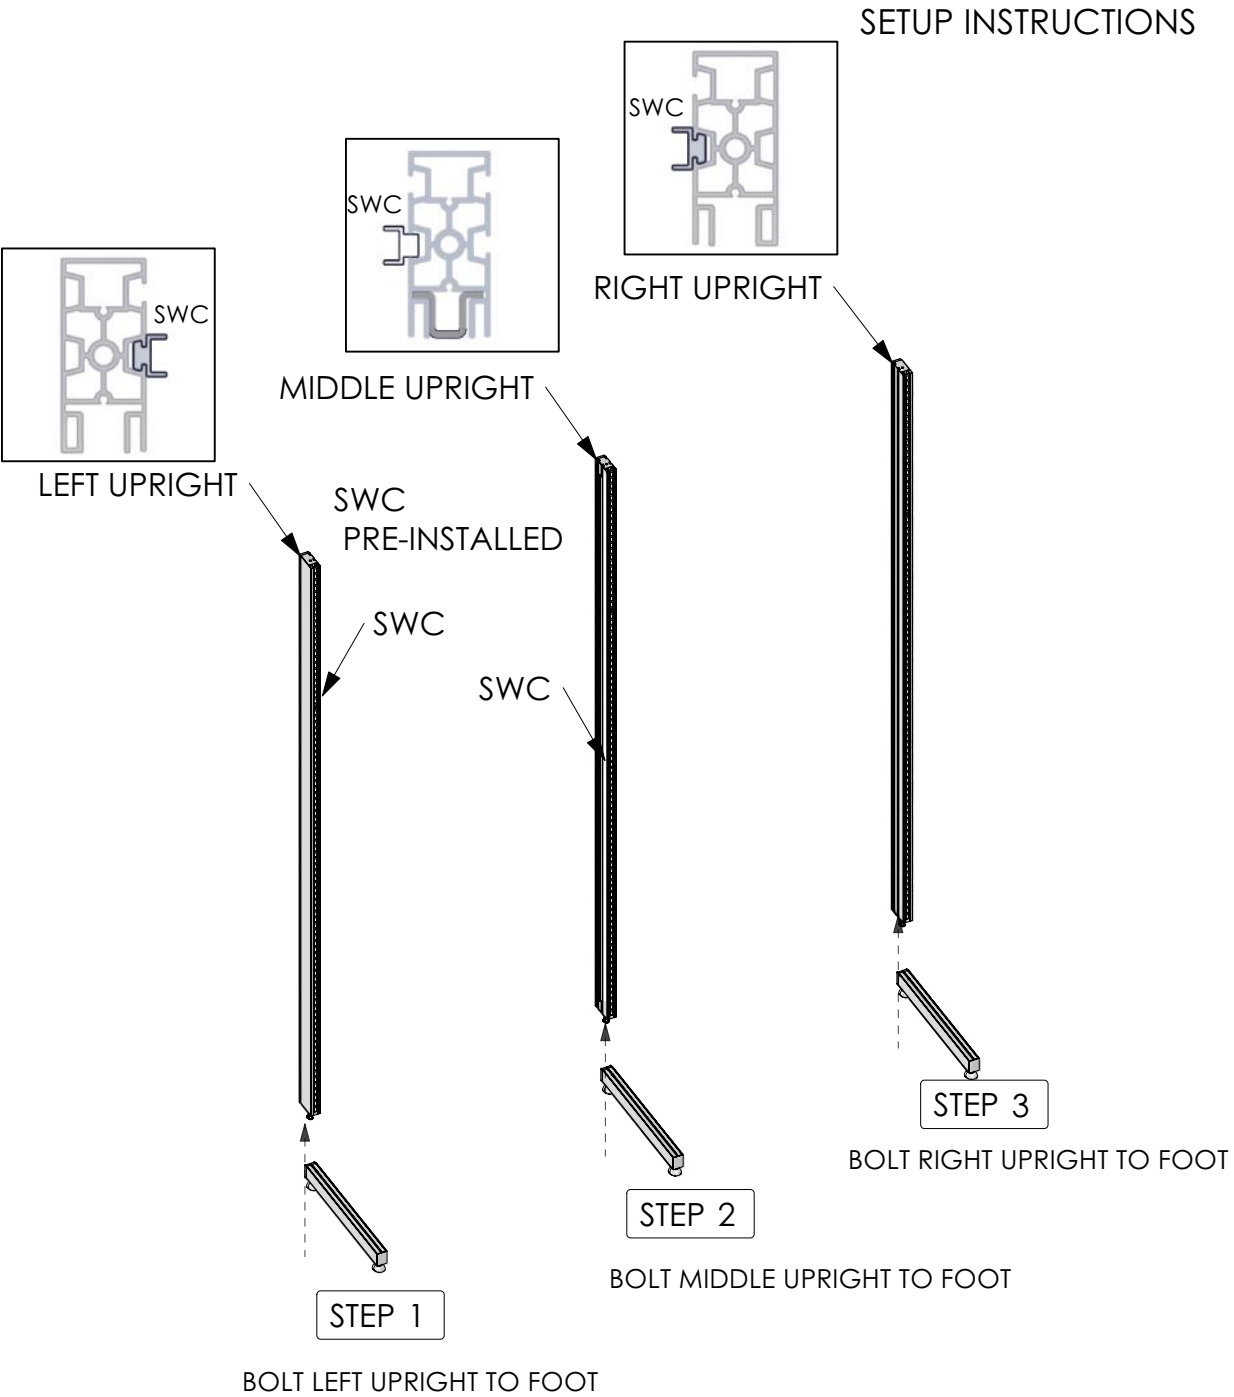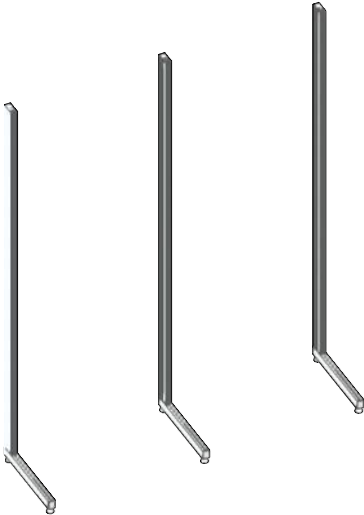


MFY-BOLT-375-16-2.5




Disclaimer: Unit must be permanently secured and fastened to wall or other structure for stability.

QTY	IMAGE	DESCRIPTION
2		883MM (34.76in) OF 835 DOUBLE SIDED SEG EXTRUSION -WITH CAM LOCKS BOTH ENDS
1		883MM (34.76in) OF SWC EXTRUSION
4		WALL BRACKET



CROSS BRACE SITS ON SUPPORT LEG




SLOT WALL TOP CHANNEL


SETUP INSTRUCTIONS

STEP 6



* LOCK TOP CROSS BRACE AND PLACE END CAPS TO ALIGN WALL BRACKETS (TEMPORARY INSTALLED)




IMPORTANT!
MAKE A HALF TURN
TO LOCK EXTRUSIONS



WALL MOUNT CLIPS

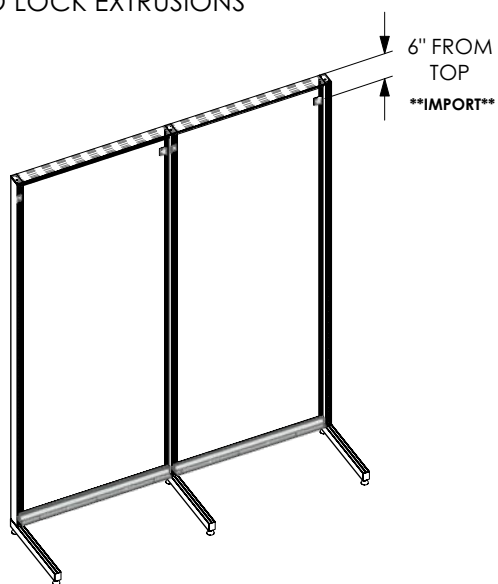

LOOSEN END CAP TO ATTACH
TOP CROSS BRACE

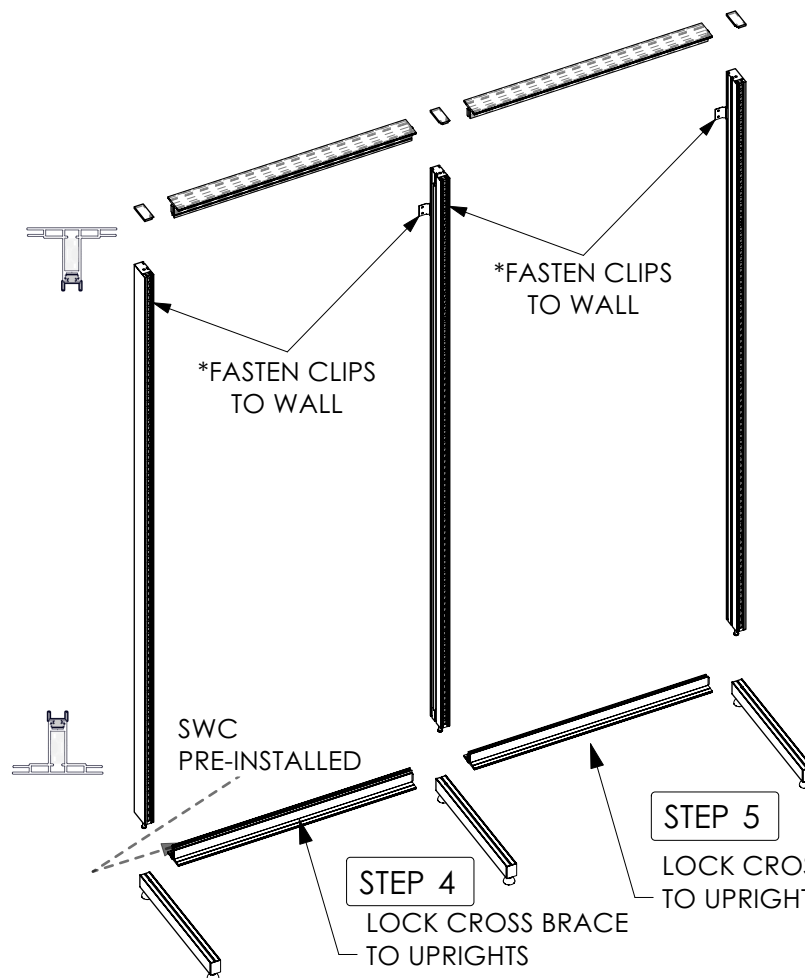

STEP 4

LOCK CROSS BRACE
TO UPRIGHTS

STEP 5


LOCK CROSS BRACE
TO UPRIGHTS

NOTE: BOTTOM CROSS BRACE SITS ON TOP INSIDE
EDGE OF LEFT AND RIGHT SUPPORT LEG

Disclaimer: Unit must be permanently secured and fastened to wall or other structure for stability.

SETUP INSTRUCTIONS

QTY	IMAGE	DESCRIPTION
2		883MM (34.76in) OF 835 DOUBLE SIDED SEG EXTRUSION -WITH CAM LOCKS BOTH ENDS
14		879MM (34.61in) LENGTH OF SLOTWALL EXTRUSION
1		879MM (34.61in) LENGTH OF SLOTWALL EXTRUSION -WITH 27.75MM BOTTOM CUT
1		883MM (34.76in) OF SWC EXTRUSION
2		7MM SEG PLASTIC END CAP FOR 831 EXTRUSION
1		7MM SEG PLASTIC END CAP FOR 830 EXTRUSION



LOOSEN END CAP TO ATTACH TOP CROSS BRACE

STEP 7


* REMOVE TOP CROSS BRACE AND END CAPS (TEMPORARY INSTALLED)

STEP 8


SLOTWALL EXTRUSION
STACK 005-879

STEP 9

LOCK CROSS BRACE TO UPRIGHTS AND PLACE END CAPS





SLOTWALL 005




SWC
PRE-INSTALLED

SLOT WALL BOTTOM
CHANNEL

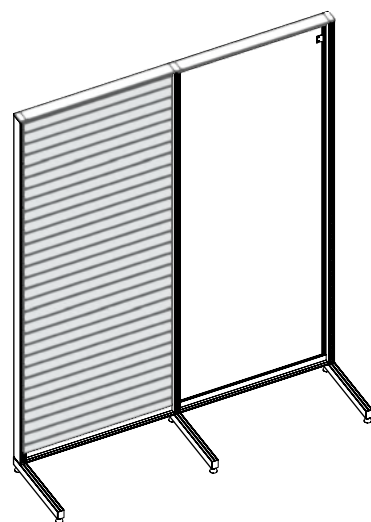

SLOTWALL


BOTTOM CUT
SLOTWALL

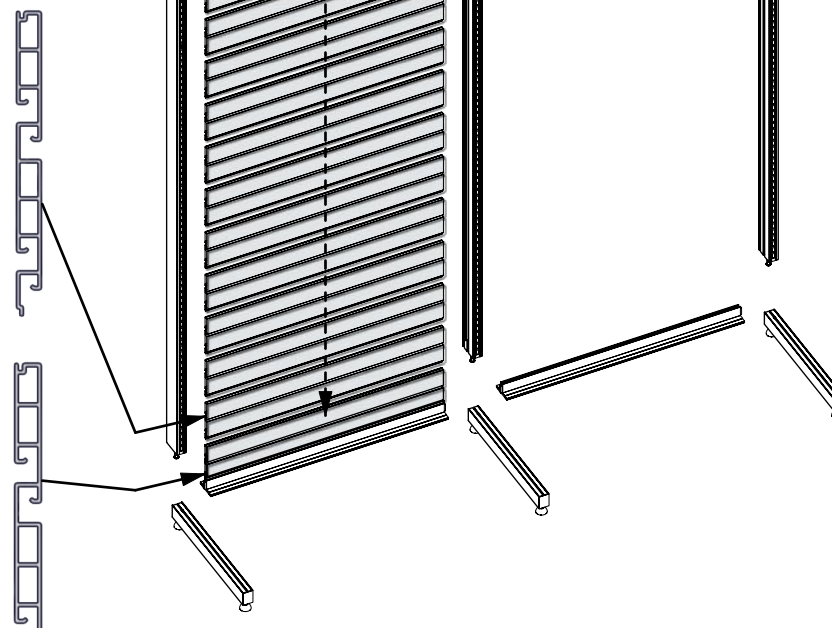


1



(39.26 w X 96.61 h total size)
35.26 w X 92.61 h finish size,
Dye-sub print on Eclipse
Blockout Stretch, single sided,
sewn with FCE-2 silicone
beading around perimeter &
pull tab in bottom right corner
(WITH 1/4" NOTCH LEFT &
RIGHT BOTTOM HORIZONTAL
SIDE CORNERS)

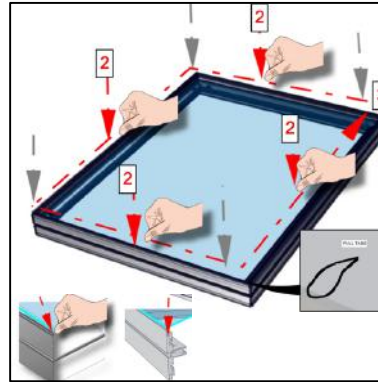

THEN PRESS ALONG THE
PERIMETER EDGE

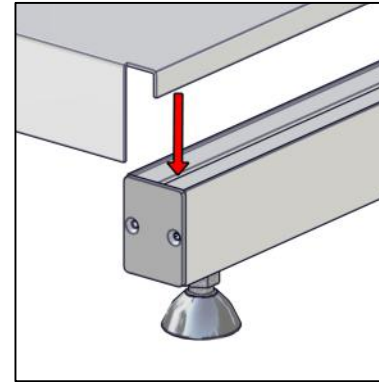



MFY-36-17-BASE-PAN

SETUP INSTRUCTIONS

2



36in WIDE X 17.25in DEEP -
DROP-IN BASE PAN

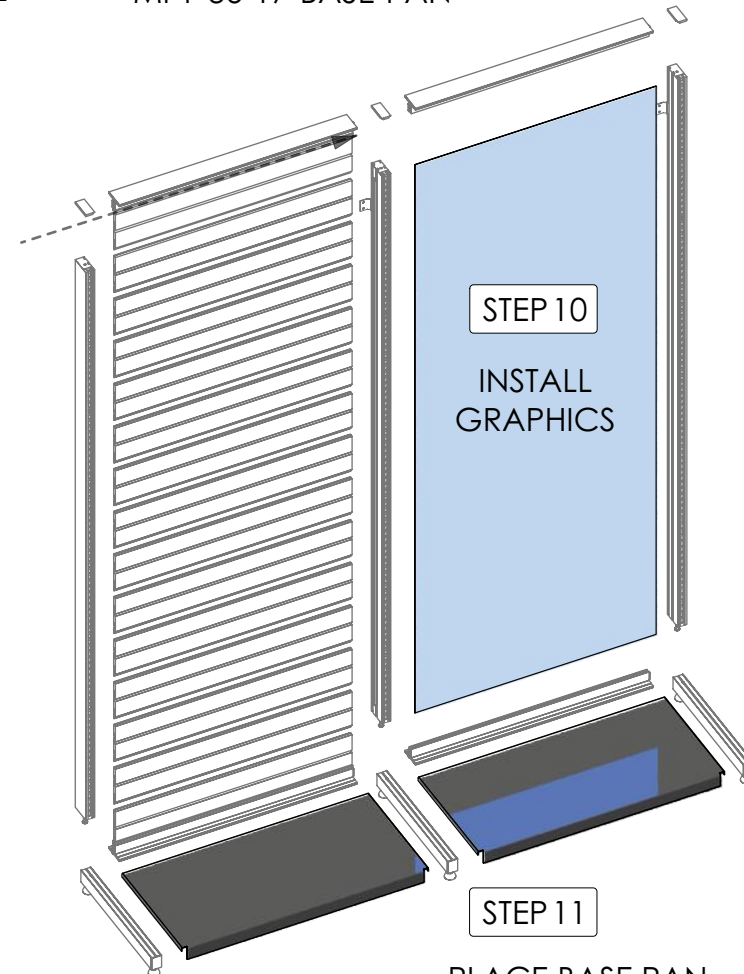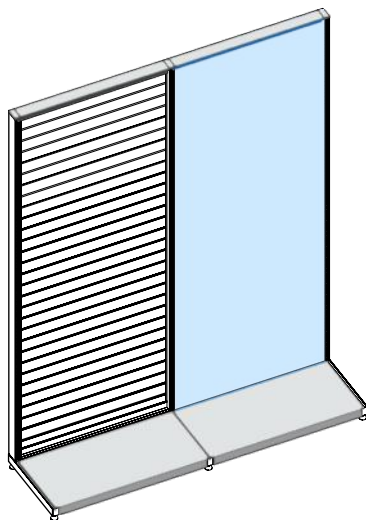


STEP 10
INSTALL
GRAPHICS


STEP 11

PLACE BASE PAN
IN GROOVE(FOOT)

Kit Hardware BOM

ITEM	COMPONENTS	QTY	DESCRIPTION
	004-883	2	883MM (34.76in) OF SWC EXTRUSION
	004-2250	2	2250MM (88.58in) OF SWC EXTRUSION
	005-879	14	879MM (34.61in) LENGTH OF SLOTWALL EXTRUSION
	005-879	1	879MM (34.61in) LENGTH OF SLOTWALL EXTRUSION -WITH 27.75MM BOTTOM CUT
	824-512	3	512MM (20.16in) SUPPORT LEG
	830-2350	1	2350MM (92.52in) MIDDLE UPRIGHT
	830-EC	1	7MM SEG PLASTIC END CAP FOR 830 EXTRUSION
	831-2350	1	2350MM (92.52in) LEFT UPRIGHT
	831-2350	1	2350MM (92.52in) RIGHT UPRIGHT
	831-EC	2	7MM SEG PLASTIC END CAP FOR 831 EXTRUSION
	835-883-01-01	4	883MM (34.76in) OF 835 DOUBLE SIDED SEG EXTRUSION -WITH CAM LOCKS BOTH ENDS
	MFY-BOLT-375-16-2.5	3	3/8-16 x 2.5"L bolt
	MFY-BRKT3	4	WALL BRACKET
	MFY-DB-36-17	2	36in WIDE X 17.25in DEEP - DROP-IN BASE PAN

Kit Graphics BOM

ITEM	COMPONENTS	QTY	DESCRIPTION
	MFY-SS-05-G	1	(39.26 w X 96.61 h total size) 35.26 w X 92.61 h finish size, Dye-sub print on Eclipse Blockout Stretch, single sided, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner (WITH 1/4" NOTCH LEFT & RIGHT BOTTOM HORIZONTAL SIDE CORNERS)