hybrid pro rental kit

Hybrid Pro Modular Kit 20

Files at 25% of actual scale
Dye Sub Graphic Structure G (RNG - 1204)
Outside Dimensions:
Total Graphic Area: 462.4"w x 58"h
Finished Graphic Area: 452.4"w x 48"h
Inside Dimensions:
Total Graphic Area: 455"w x 58"h
Finished Graphic Area: 445"w x 48"h

Dye Sub Graphic Panel A1 A2 B1 B2 C1 C2 D1 D2
Total Graphic Area: 43.25"w x 98.375"h
Finished Graphic Area: 39.25"w x 94.375"h

Dye Sub Graphic Panel E1 and E2
Total Graphic Area: 59.11"h x 169.35"w
Finished Graphic Area: 55.11"h x 165.35"w
Side Panels:
Total Graphic Area: 15.81"h x 169.35"w
Finished Graphic Area: 11.81"h x 165.35"w
Bottom Ceiling:
Total Graphic Area: 51.25"h x 169.35"w
Finished Graphic Area: 47.25"h x 165.35"w

Please consider obstructions and spaces created by the extrusions when designing your graphics.

Please be sure to include 2" of bleed around the perimeter of dyesub graphics.
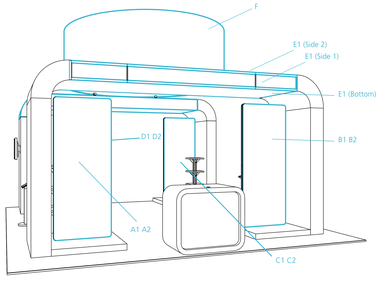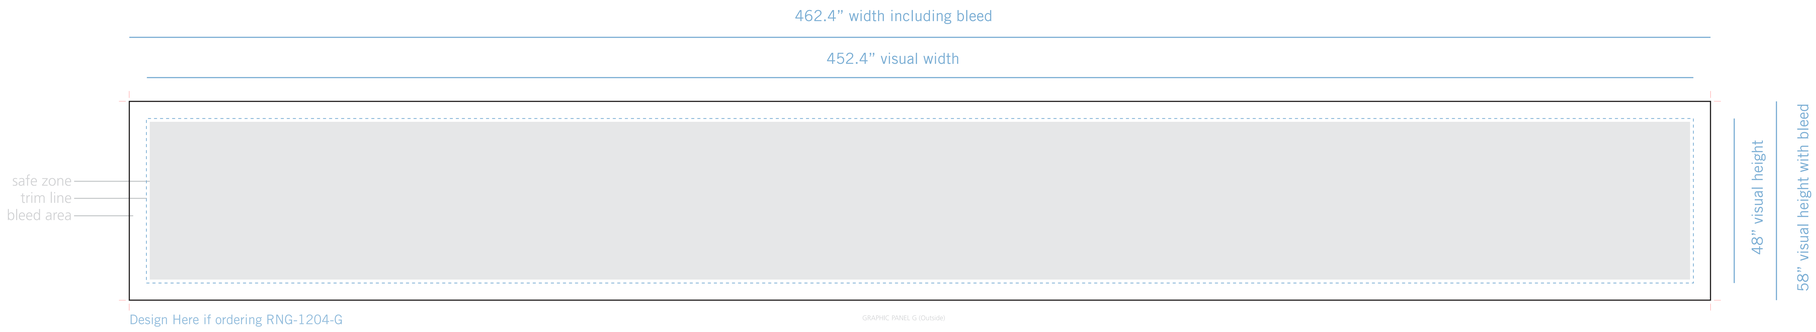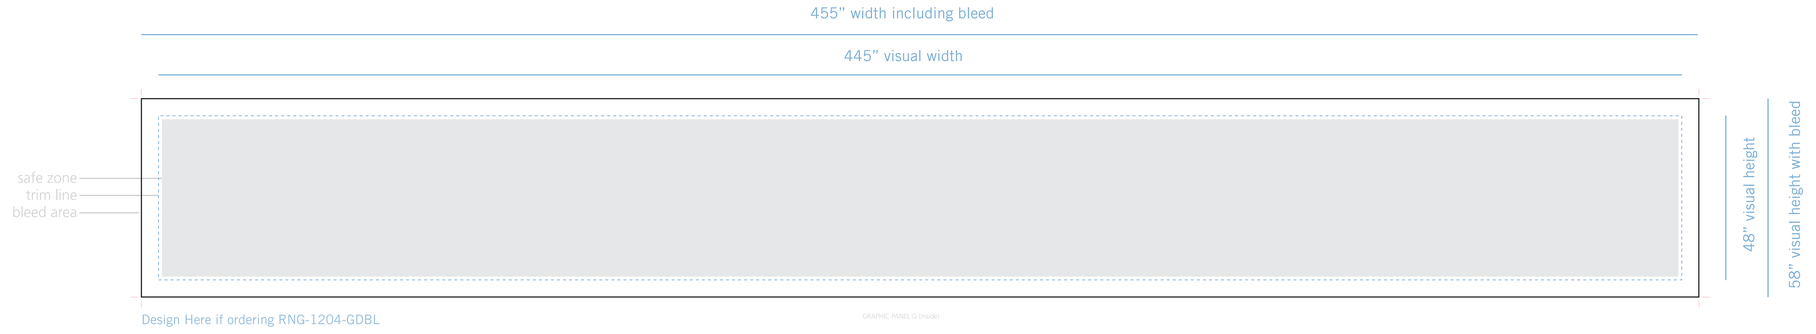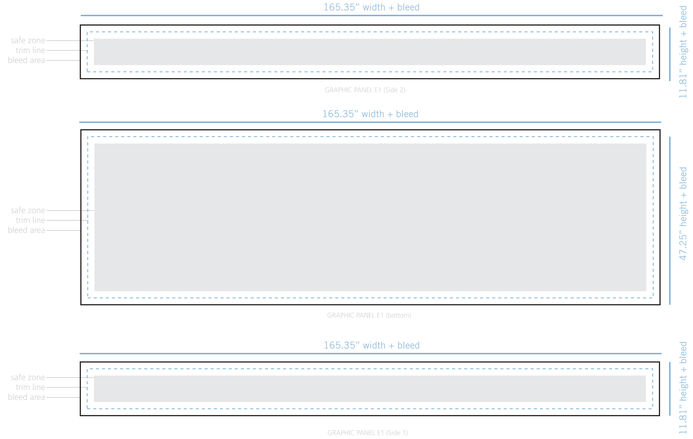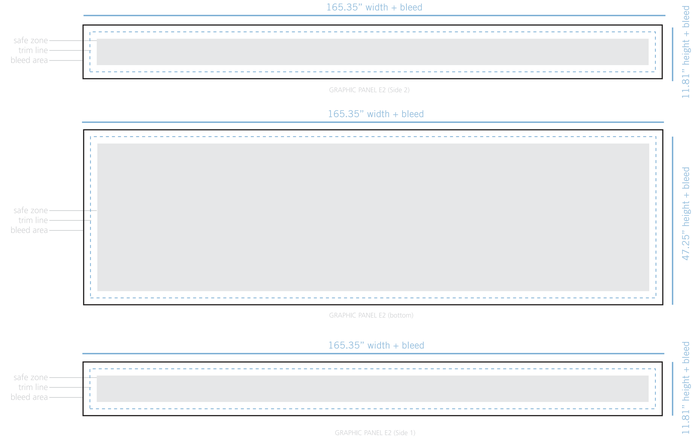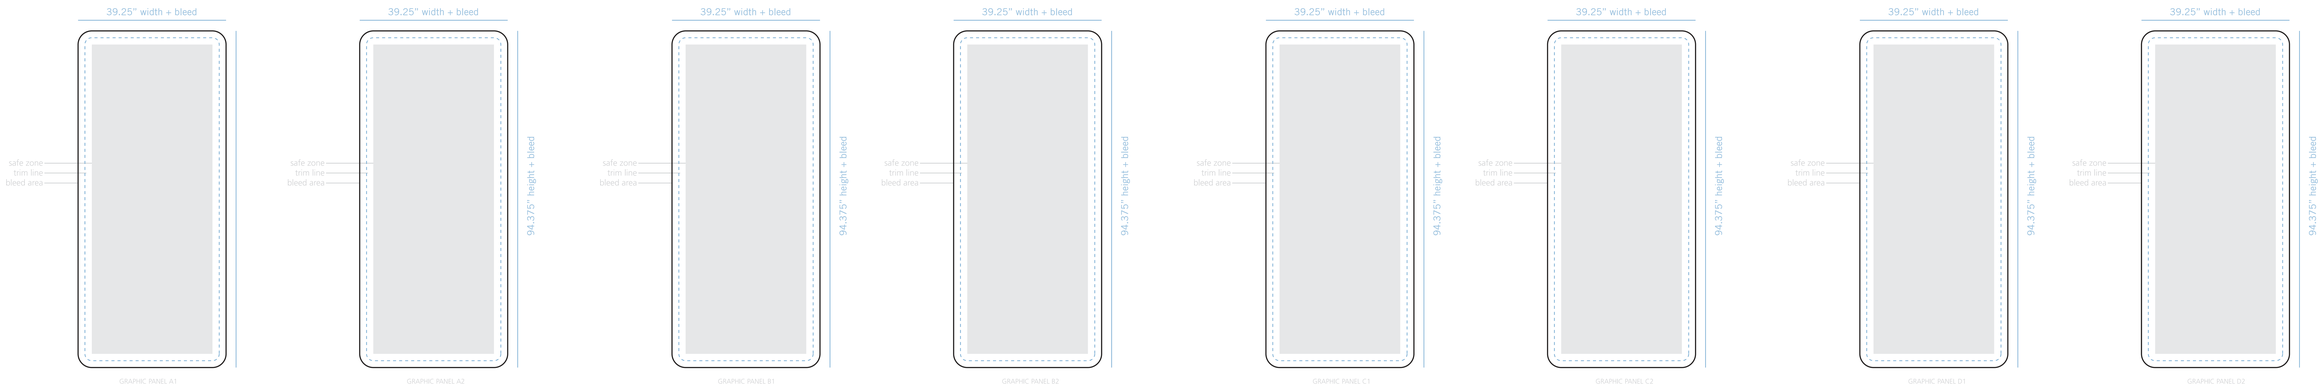
General Artwork Guidelines
- cmyk color mode
- do not embed images, supply them
- resolution must be 100-120ppi
- all fonts must be created to outlines
- do not design any critical elements near the extrusions