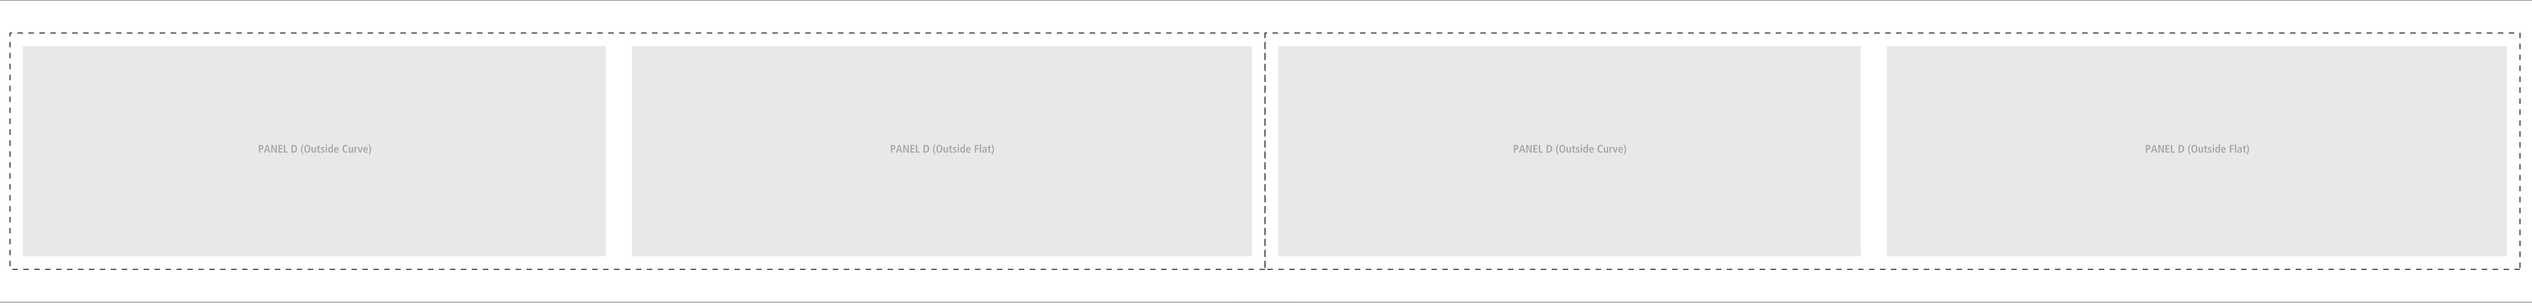

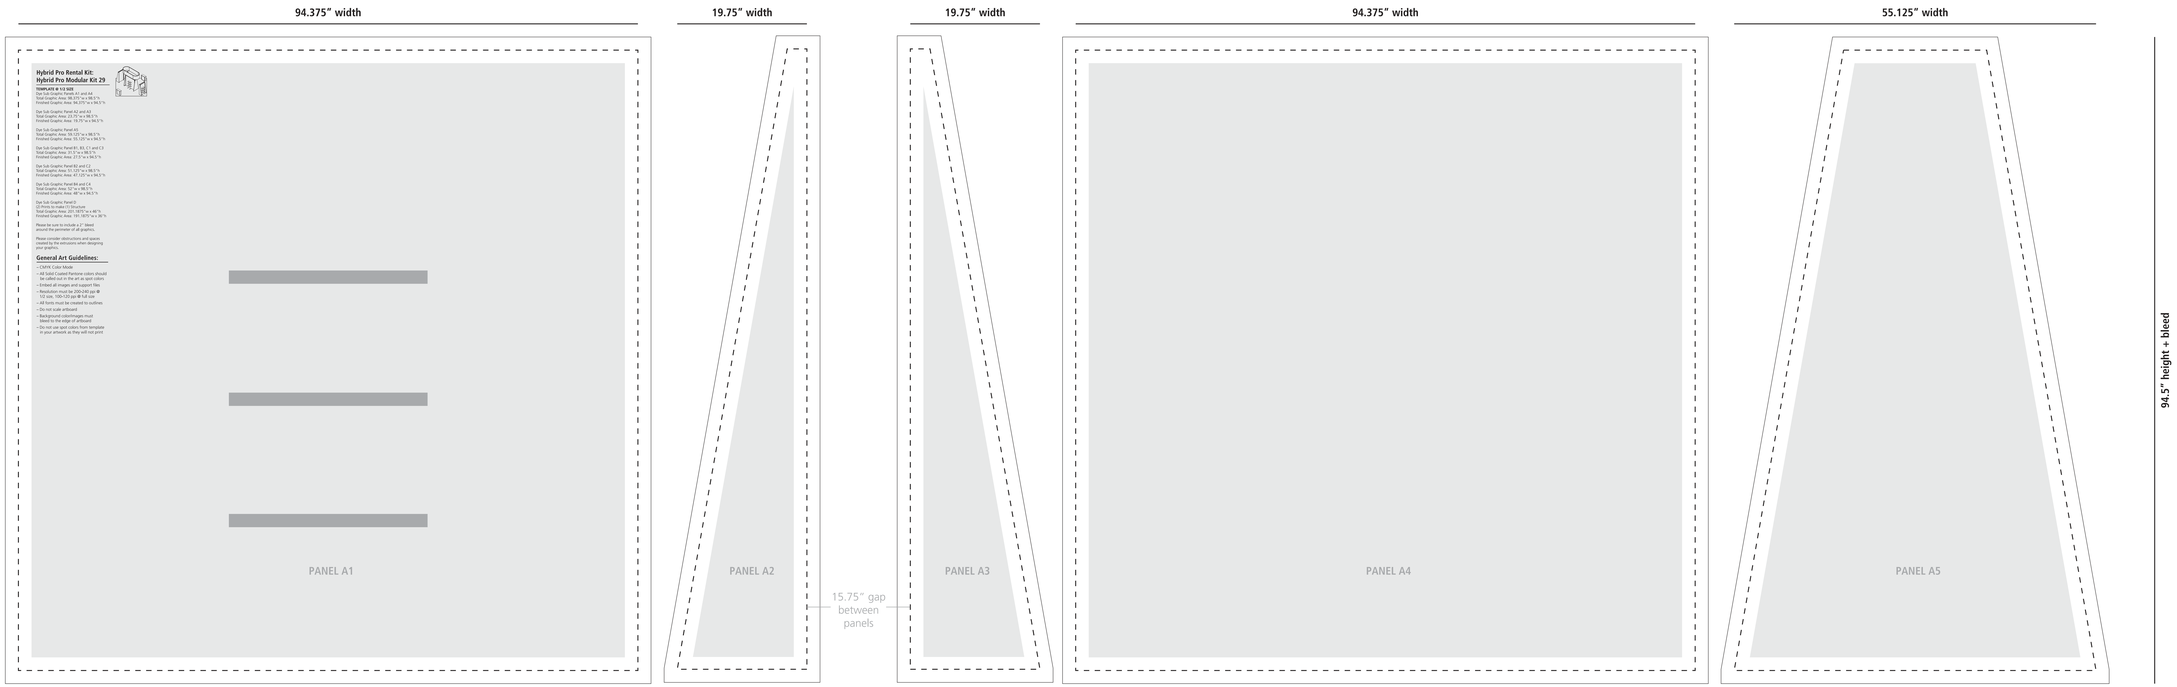

Hybrid Pro Rental Kit:
Hybrid Pro Modular Kit 29

TEMPLATE #: 112 SIZE

Dye Sub Graphic Panel A1 and A4
Total Graphic Area: 96.875" w x 98.5" h
Finished Graphic Area: 94.375" w x 94.5" h

Dye Sub Graphic Panel A2 and A3
Total Graphic Area: 23.75" w x 98.5" h
Finished Graphic Area: 21.25" w x 94.5" h

Dye Sub Graphic Panel A5
Total Graphic Area: 58.125" w x 98.5" h
Finished Graphic Area: 55.125" w x 94.5" h

Dye Sub Graphic Panel B1, B3, C1 and C3
Total Graphic Area: 29.5" w x 98.5" h
Finished Graphic Area: 27.5" w x 94.5" h

Dye Sub Graphic Panel B2 and C2
Total Graphic Area: 51.125" w x 98.5" h
Finished Graphic Area: 47.125" w x 94.5" h

Dye Sub Graphic Panel B4 and C4
Total Graphic Area: 52" w x 98.5" h
Finished Graphic Area: 48" w x 94.5" h

Dye Sub Graphic Panel D
Total Graphic Area: 193.75" w x 48" h
Finished Graphic Area: 191.1875" w x 36" h

Please be sure to include a 2" bleed around the perimeter of all graphics.

Please consider obstructions and spaces created by the extrusions when designing your graphics.

General Art Guidelines:

- CMYK Color Mode
- All Solid Coated Pantone colors should be called out in the art as spot colors
- Embed all images and support files into the document or provide high quality 300 dpi, 100+GS gsc @ full size
- All fonts must be created to outlines
- Do not scale artboard
- Background color/images must bleed to the edge of artboard
- Do not use spot colors from template in your artwork as they will not print

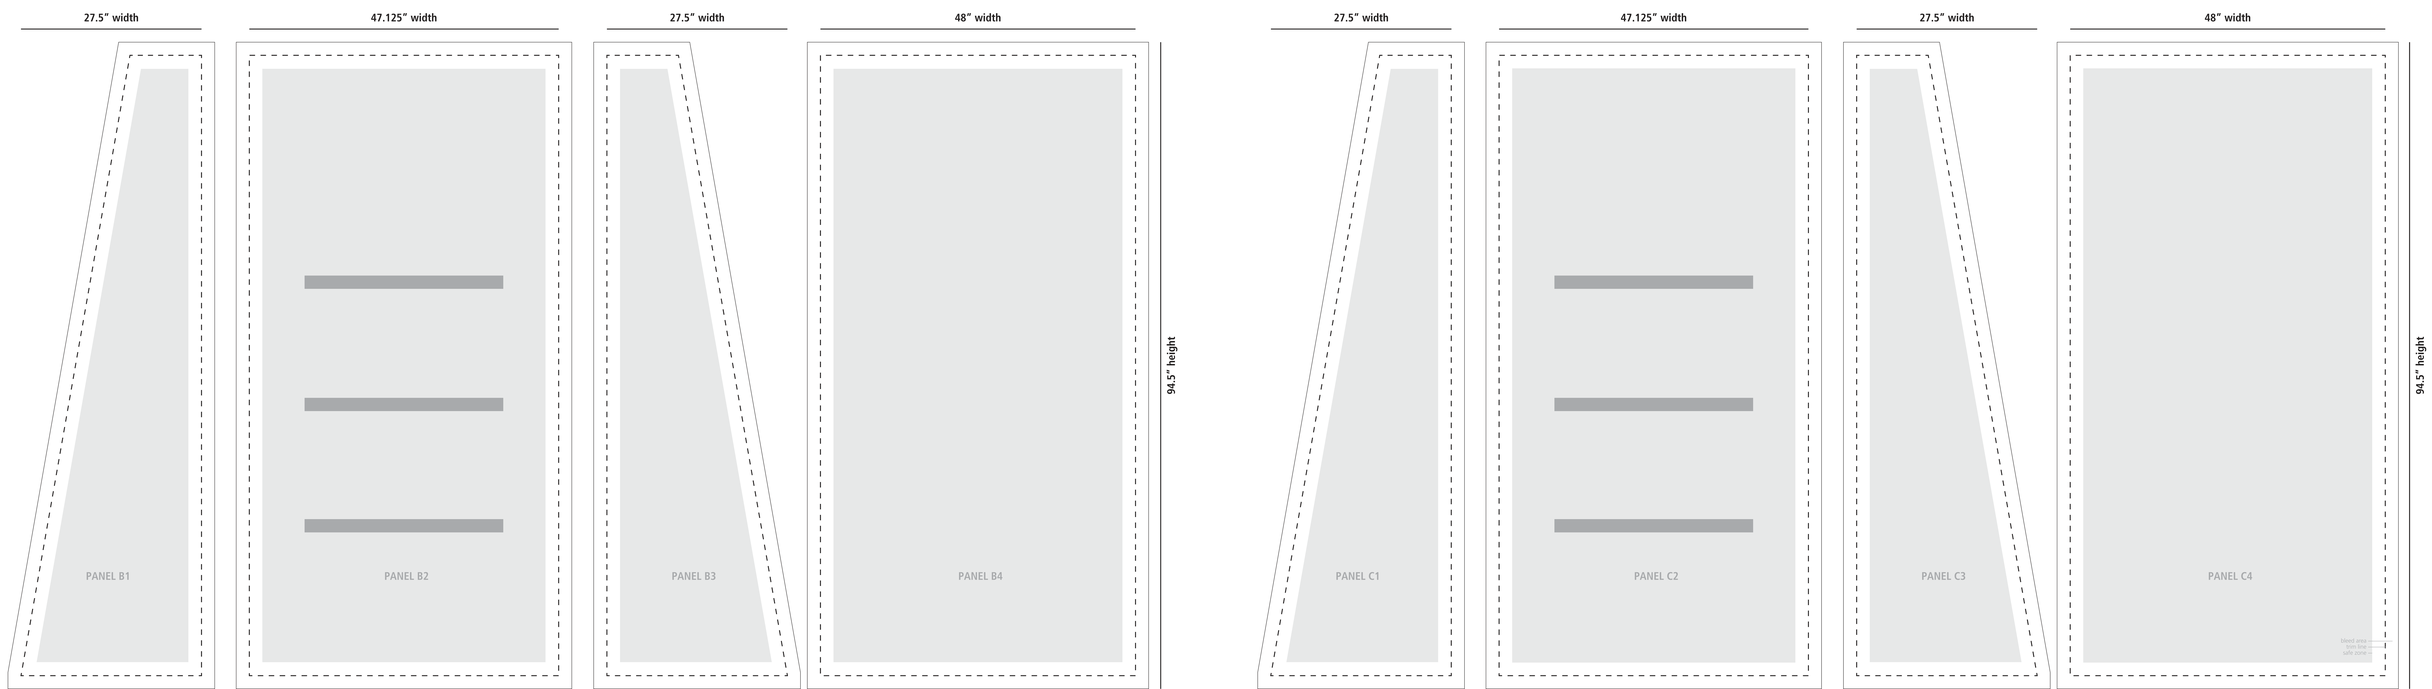

Hybrid Pro Rental Kit:
Hybrid Pro Modular Kit 29

TEMPLATE @ 1/2 SIZE
Dye Sub Graphic Panels A1 and A4
Total Graphic Area: 98.375”w x 98.5”h
Finished Graphic Area: 94.375”w x 94.5”h

Dye Sub Graphic Panel A2 and A3
Total Graphic Area: 23.75”w x 98.5”h
Finished Graphic Area: 19.75”w x 94.5”h

Dye Sub Graphic Panel A5
Total Graphic Area: 59.125”w x 98.5”h
Finished Graphic Area: 55.125”w x 94.5”h

Dye Sub Graphic Panel B1, B3, C1 and C3
Total Graphic Area: 31.5”w x 98.5”h
Finished Graphic Area: 27.5”w x 94.5”h

Dye Sub Graphic Panel B2 and C2
Total Graphic Area: 51.125”w x 98.5”h
Finished Graphic Area: 47.125”w x 94.5”h

Dye Sub Graphic Panel B4 and C4
Total Graphic Area: 52”w x 98.5”h
Finished Graphic Area: 48”w x 94.5”h

Dye Sub Graphic Panel D
(2) Prints to make (1) Structure
Total Graphic Area: 201.1875”w x 46”h
Finished Graphic Area: 191.1875”w x 36”h

Please be sure to include a 2” bleed around the perimeter of all graphics.

Please consider obstructions and spaces created by the extrusions when designing your graphics.

General Art Guidelines:

- CMYK Color Mode
- All Solid Coated Pantone colors should be called out in the art as spot colors
- Embed all images and support files
- Resolution must be 200-240 ppi @ 1/2 size, 100-120 ppi @ full size
- All fonts must be created to outlines
- Do not scale artboard
- Background color/images must bleed to the edge of artboard
- Do not use spot colors from template in your artwork as they will not print

PANEL A1

PANEL A2

PANEL A3

PANEL A4

PANEL A5

PANEL B1

PANEL B2

PANEL B3

PANEL B4

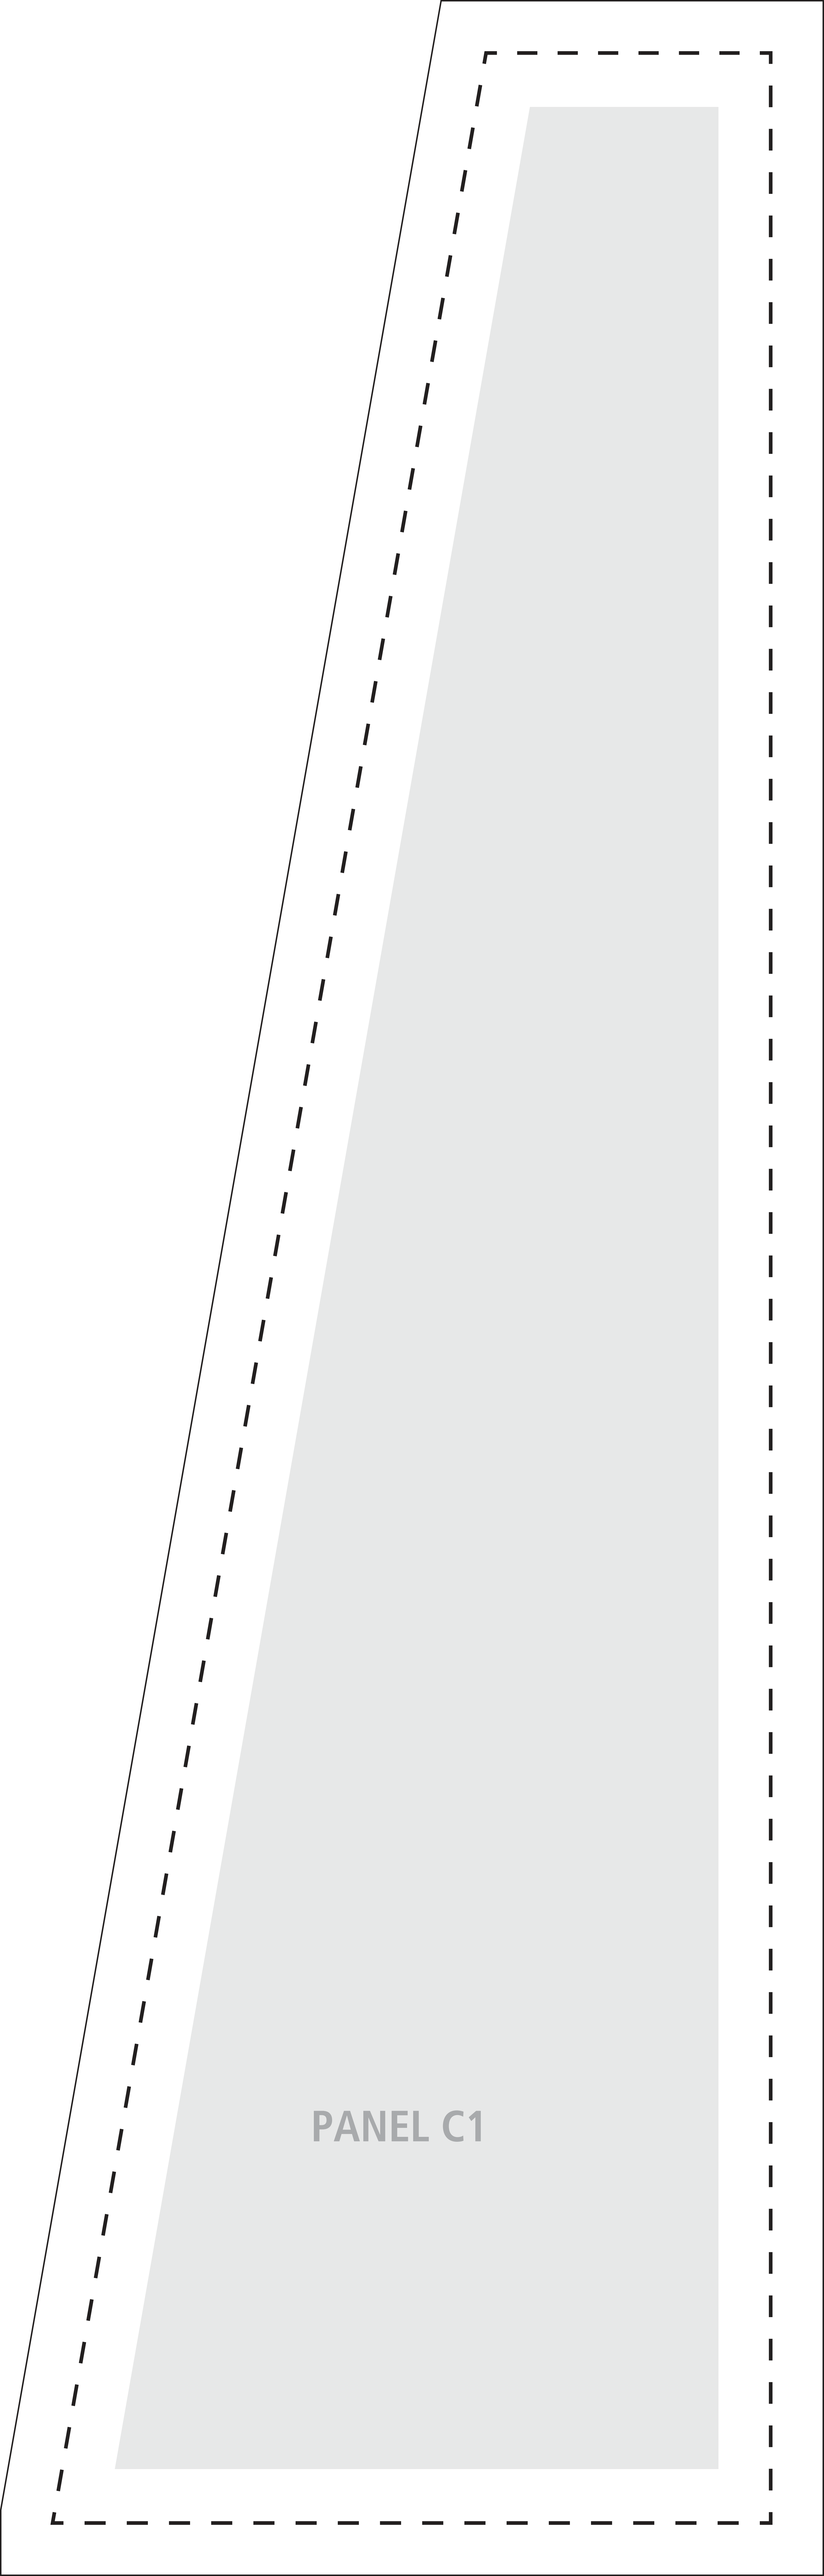
PANEL C1

PANEL C2

PANEL C3

PANEL C4

bleed area
trim line
safe zone

PANEL D (Outside Curve)

PANEL D (Outside Flat)

PANEL D (Outside Curve)

PANEL D (Outside Flat)